


# Showers & Washroom Solutions

# Commercial & Public Facilities



	Introduction	1
Water Management	CNX Water Management System Service APP	20
Shower solutions	Showers System descriptions   electronic	54
	Showers mechanical	124
	Accessories   Conversion sets for shower faucets	158
	Shower heads   Spa & wellness	184
	Thermostat batteries	214
Washroom solutions	Lavatory & Kitchen faucets electronic	224
	Lavatory faucets mechanical	312
	Accessories for lavatory faucets	326
	Washbasin solutions	340
	Urinal flush valves electronic   Accessories   Conversion set	350
	Sanitary equipment	368
Hygiene solutions	Disinfectants Drinking water/surface/room air/swimming pool filters	434
Information	Index of Article numbers & GTC	454

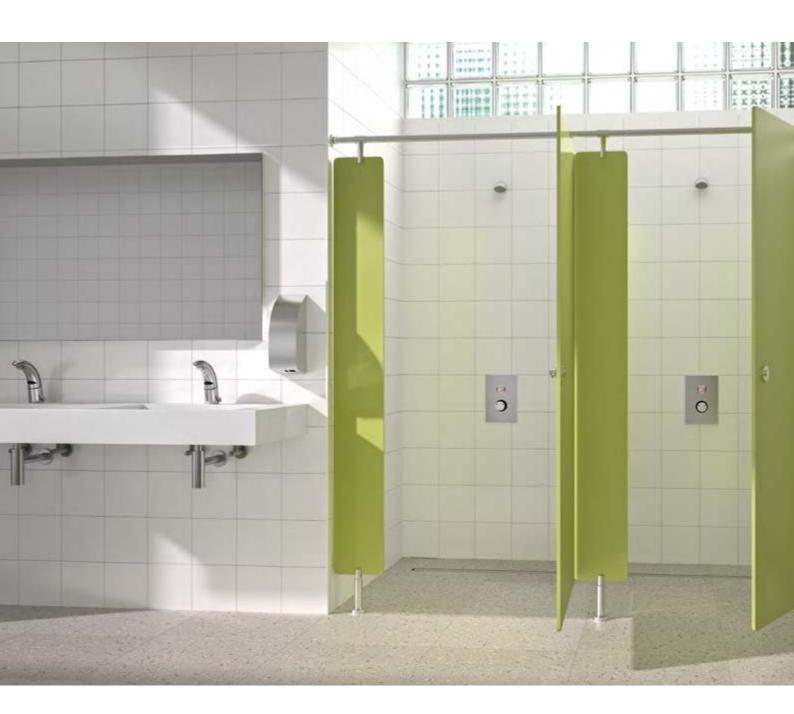





Introduction	1	Thermostat batteries	
		Thermostat batteries exposed	214
WATER MANAGEMENT		Thermostatic mixing valves	216
CNX Water Management System Service APP		WASHROOM SOLUTIONS	5
		Electronic faucets	
SHOWER SOLUTIONS		Functional options	222
Showers - Descriptions	40	Touchless lavatory faucets	
Functional options		ultra	
Electronic chavene		lino	
Electronic showers	60	lumino	
Shower panels		iQ	
Concealed showers		senso	
Exposed showers		loopino	
Freestanding showers	116	maxxumaxx	
Mechanical showers			203
Shower panels	124	Self-closing lavatory faucets	264
Concealed showers		tipolino	264
Exposed showers		Concealed faucets	
		CONGENIAL FIT	
Accessories for shower faucets		ultra	
Raw-assembling sets, cables etc	158	lino	
Shower heads		iQ	289
Jet shower heads	184	Exposed wall-mounted faucets	
Rain shower heads		CONBASE	
Shower head kits		lino	295
Hand shower set		Multiple washing systems	
Wall elbow		CONGENIAL	300
Wall duct		lino	305
Adapter		Kitchen faucet	
	133	Hybrid kitchen faucet H10	309
Spa & Wellness		Mechanical faucets	
Rain shower heads	196		
Spray/jet shower heads	202	Lavatory and wall-mounted fau	
Ball-type nozzle	203	lino SofTouch	
Waterfall shower head	203	CONWASH	
Shower arms	204	CONMED	
Waterfall bucket showers	206	Thermostatic mixing valve	320
Power shower sets	208	<b>Accessories for faucets</b>	
Shower sets for Kneipp's affusions	210	Power supplies connectors etc	326







Washbasin solutions		Stainless steel equipment	
Washbasins mineral cast gelcoat		Hand and hair dryer	392
Additional charges	344	Hand dryer	
Countertop washbasin	346	Hair dryer	
Using Health and an		Paper- / Wastebins	
Urinal flush valves	250	Hygiene bins	
Functional options	350	Hygiene bag dispenser	
Concealed urinal flush valves		Paper towel dispenser	
ultra		Diaper changing table	
iQ		Wall and table soap dispenser	
lino		Dispenser soap   disinfectant	
Siphon regulator	35/	Toilet accessories	
Exposed urinal flush valves			
lino AP	358	Wall mirrors	
Accessories	359	Consumable supplies	
Retrofitting set		Washbasins	
		Built-in-basin	
Sanitary equipment		Wash troughs	
Design series SteelTec		Accessories	
Hand dryer		Laboratory sink	
Paper towel dispenser	369	Bucket sinks	424
Dispenser		Urinal	
Toilet paper holder		Wall-mounted toilet	429
Hygiene bin			
Waste bins		HYGIENE SOLUTIONS	
Diaper changing table			
Paper holder	3/6	Disinfection solutions	
Design series BJÖRK			40.0
Hand dryer		Drinking water disinfection	
Paper dispenser		Surface disinfection	
Dispenser		Room air disinfection	
Toilet paper holder		Swimming pool filter disinfection	444
Hygiene box		Dosing systems	
Waste bin		Dosing pump	446
Diaper changing table		Connection set	
Paper towel dispenser	385	Mobility equipment	
Floor stands	386	Accessories	
Table stands	387		452
Drip trays	388	Fogging devices	
Transformer	389	Drinking water hygiene test	453
Design series TAP		Information	
Hand dryer	390	Index of article numbers	456
Dispenser soap   disinfectant	391	GTC	462





# Smart systems for a better quality of life

Hygienic, smart shower room and washroom concepts to improve quality of life have been the hallmark of the CONTI+ brand for over 45 years. With our innovative technologies, long-standing expertise, and comprehensive range of services, we offer optimum solutions to meet all our customers' needs for new build and refurbishment projects. Impressive, flexible all-round expertise.

From advanced electronic and mechanical shower and washbasin faucets to urinal flush valves and washbasins, as well as complete washroom equipment and disinfection concepts, we take an integrated approach with a strong focus on sustainability, hygiene and reliability. Our smart innovations in the field of electronics and user interfaces ensure maximum comfort, the best possible customer benefits and consistent protection of the environment.

Discover our comprehensive, unique range of products and services for shower room and washroom solutions – designed to ensure successful projects and satisfied customers!

Your

CONTI+ Team

1









# SUSTAINABLE

# Forward thinking resource efficiency

We have been committed to sustainable operation and working in harmony with people and nature for many years. Factors which play a key role in the development of our CONTI+ shower systems include responsible use of water and energy, permanently low maintenance utilisation, and economic efficiency throughout the whole life cycle.

We also systematically prevent unnecessary environmental pollution by using uncoated stainless steel, materials with a low nickel/lead content, recyclable plastics and environmentally responsible disinfectants. This combination of cutting edge technology with efficient handling of resources ensures future proof customer benefits.

The elements of the CONTI+ water saving concept include:



## CONTI+ CNX water management system

Setting, deactivation and programming of integrated shower systems, washbasin faucets and urinal controls



### CONTI+ Service APP

Individual control of shower systems, washbasin faucets and urinal controls for programming, direct triggering of functions, logging and reading data



# Convenient cleaning without additional water consumption

Thanks to cleaning stop



# Electronic water running time

Electronic automatic shut-off with adjustable water running times for reduced water consumption



## Mechanical water running time

Mechanical automatic shut-off with adjustable water running time for reduced water consumption



## Start/stop function to save water

Adjustable and/or automatic start/stop function to save water

# **HYGIENIC**

# Cleanliness for all-round safety

Hygiene requirements are increasing all the time, particularly in public, semi-public, commercial and industrial buildings – both nationally and internationally. We continually optimise our shower systems to meet these needs. Our comprehensive CONTI+ hygiene concept guarantees maximum safety in shower rooms and washrooms – for every application area. Our services include individual hygiene planning, use of hygienic materials and incorporating important functions such as sanitary flush and thermal disinfection.

A key aspect of our hygiene concept is the intelligent CONTI+ CNX water management system. This allows simple, clear management of up to 150 showers, washbasin faucets and urinal flush valves to ensure reliable implementation and documentation of all hygiene functions and operational actions.

Our innovative technologies and hygiene functions:



### Hygienic by reducing germs

Prevention or minimisation of germs through the use of germ inhibiting materials



## Hygiene flush

Automatic mixed water flush of electronic faucets – with demand-dependent triggering at intervals, time control or a calendar function, as required, either integrated in the CNX Water Management System or accessed via the Service APP



## Cold water flush

Cold water flush of electronic shower and wash basin faucets integrated into the CNX Water Management System or via the Service APP



## Thermal disinfection, manual

Thermal flush of faucets via a manually opened TD plug, integrated in the shower control



### Thermal disinfection, electronic

Thermal flush of faucets by means of a key-switch or as a calendar function in the CNX Water Management System or via the Service APP









# SAFE

# Intelligent technology for the best protection

Safety is the top priority in the sanitary sector – leading to numerous legal and normative regulations for the installation and operation of shower systems, particularly in public, semi-public and commercial application areas.

Our CONTI+ solutions meet all these requirements. All our shower systems are fail-safe, reliable, and ensure maximum comfort for users and protection against inadvertent misuse.

We always take into account not only product safety, but also futureproofing. Thanks to our long-standing market presence and affiliation to a well-established Swiss group of companies, together with our in-house customer service and reliable availability of spare parts, CONTI+ customers can count on safety at all times – now and in future.

The elements of the CONTI+ safety concept include:

- Safe water quality thanks to approved materials, smart in some cases patented – designs and technology, innovative hygiene functions and measures
- Vandal protection for reliable operation, based on special construction and design, internal components and robust materials
- **Cleaning stop** effectively prevents unwanted triggering of water flow, which protects cleaning personnel
- Certification through independent assessment e.g. WRAS, DVGW and Watermark
- **Premium quality** with all systems 100 % tested, including functional test and spare parts warranty
- Integral thermostatic anti-scalding protection to EN 1111 for optimum safety

Anti-scalding protection: cartridge closes if cold water supply fails Vandal-proof temperature control: Fixing on the CONGENIAL faucet body, providing protection against damage to the cartridge



# **SMART**

# Water management has never been so easy

With the national and international hygiene requirements for drinking water installations growing more stringent, smart water management systems are becoming increasingly important.

CONTI+ has a long history of developing smart solutions for central management, control and monitoring of devices and components for shower systems.

From individual faucets to complete systems with up to 150 CONTI+ faucets, our intelligent technologies allow very easy and reliable management of all operating, documentation and safety functions, such as convenient automation of rinses, setting operating periods for thermal disinfection and setting operation stops or cleaning stops. This ensures more comfort and outstanding hygiene.

The elements of the CONTI+ smart concept include:

- **CONTI+ CNX water management system**: for integration of up to 150 CONTI+ faucets to meet the most demanding hygiene requirements
- **CONTI+ Service APP**: convenient control of individual shower systems, washbasin faucets and urinal controls with programming, logging and data documentation via BLE Converter connection



CONTI+ CNX water management system
Faucets can be integrated into the CNX water
management system for central control and logging
of actions and functions of individual faucets



CONTI+ Service APP

and groups of faucets

Individual control of individual shower systems, washbasin faucets and urinal controls for programming, direct triggering of functions, logging and reading data









	FUNCTIONAL OPTIONS			
	Hygiene functions			
Areas of application	PREVENTATIVE*	PERMANENT*	ACUTE*	
PRODUCT GROUP				
CNX Water Management System	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Thermal flush</li><li>Documented success monitoring hygiene functions</li></ul>	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Thermal flush</li><li>Documented success monitoring hygiene functions</li></ul>	Cold flush Hygiene flush Thermal flush Documented success monitoring hygiene functions	
Service APP	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Documented success monitoring hygiene functions</li></ul>	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Documented success monitoring hygiene functions</li></ul>	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Documented success monitoring hygiene functions</li></ul>	
Showers, electronic piezo pushbutton or E-control	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Thermal flush</li><li>Materials suitable for drinking water</li></ul>	<ul> <li>Cold flush</li> <li>Hygiene flush</li> <li>Thermal flush</li> <li>Materials suitable for drinking water</li> </ul>	<ul><li>Cold flush</li><li>Hygiene flush</li><li>Thermal flush</li></ul>	
Showers, mechanical	<ul> <li>Optional hygiene flushing via central key switch</li> <li>Mechanical thermal flush by manual TD plugs</li> <li>Optional electronic thermal flush via central key switch</li> <li>Materials suitable for drinking water</li> </ul>	Optional hygiene flushing via central key switch     Mechanical thermal flush by manual TD plugs     Optional electronic Thermal flush via central key switch     Materials suitable for drinking water	Optional hygiene flushing via central key switch Mechanical thermal flush by manual TD plugs Optional electronic thermal flush via central key switch	
Washbasin taps, electronic piezo pushbutton	Hygiene flush     Materials suitable for drinking water	Hygiene flush     Materials suitable for drinking water	Hygiene flush	
Washbasin taps, electronic IR sensors	<ul><li>Hygiene flush</li><li>Touch-free operation</li><li>Materials suitable for drinking water</li></ul>	Hygiene flush     Touch-free operation     Materials suitable for drinking water	Hygiene flush	
Washbasin taps, mechanical	Contact free water shut off     Materials suitable for drinking water	Contact free water shut off     Materials suitable for drinking     water	-	
Urinal faucets, electronic	<ul><li>Hygiene flush</li><li>Touch-free operation</li></ul>	Hygiene flush     Touch-free operation	Hygiene flush	
Sanitary equipment, electronic IR sensors	Touch-free operation	Touch-free operation	-	
Sanitary equipment, mechanical	-	-	-	
Shower heads	Low aerosol     Materials suitable for drinking water	Low aerosol     Materials suitable for drinking water	Low aerosol	
Spa & wellness	Materials suitable for drinking water	Materials suitable for drinking water	-	
Washbasins	Pore-free surface     Models without overflows	Pore-free surface     Models without overflows	-	
Disinfection solutions	Keeping drinking water installations, tools, components, surfaces, hands and room air free of germs	Keeping drinking water installations, tools, components, surfaces, hands and room air free of germs	Disinfection of water installations, tools, components, surfaces, hands and room air	

<sup>\*</sup> PREVENTATIVE in planning, construction and maintenance | PERMANENT in operation and in the event of risk | ACUTE for acute contamination and danger due to delay



# Icon descriptions

# Overview on icon descriptions and functions of CONTI+ products

Our products are characterized by special functions. From VARIOconnect and the hygienic flush function to Service Monitor compatibility, there are many useful features that predestine the products especially for use in public, semi-public and commercial sanitary rooms.



### **CNX Water Management System**

Central faucet management to ensure the hygienic functions of showers, lavatory faucets and urinal flush valves



### **Scald protection**

The thermostatic mixing device with scald protection ensures safety during the shower



#### **CONTI+ Service APP**

Individual valve control of shower, washbasin and urinal valves for programming, direct function triggering, logging and reading out data



#### **VARIOconnect**

The multi-functional interface VARIOconnect offers a variety of connection options for power supplies and data connection



## Hygiene flush

Automatic mixed water flush of electronic faucets - with demand-dependent triggering at intervals, time control or a calendar function, as required, either integrated in the CNX water management system or accessed via the Service APP



# **Start/Stop function**

Piezo switch with start/stop function and an adjustable, automatic water stop



### Thermal disinfection, electronic

Thermal flush of faucets by means of a key-switch or as a calendar function in the CNX water management system or via the Service APP



## Push and turn button

electronic control unit E-control, push/turn button for mixing and start/stop function



Thermal flush of faucets via a manually opened TD



### **Self-closing function**

Mechanical self-closing function



# Thermal disinfection, manual

plug, integrated in the shower control



## **Touchless function**

Infrared sensor to trigger the water flow



## Cold water flush

Cold water flush of electronic shower and wash basin faucets integrated into the CNX Water Management System or via the Service APP



### Hygienic flush via key switch

Activation of the hygienic flush via a potentialfree input with key switch



## Cleaning stop

Cleaning stop via the RC switch (interruption of the trigger function by means of magnetic reed switch, directly at the point of use) or as a calendar function via the Service APP or integrated in the CNX



#### **CONCASH 2.0**

Controlled paid water release via coins. Connecting of shower panels or concealed showers



#### **DN15**

Nominal size or connection dimension DN15 or 1/2"



#### Fresh water station

Generation of warm drinking water directly in the shower panel via plate heat exchanger



#### Frost protection

Optional frost protection cable that provides protection against frost damage



## **Instantaneous Water Heater HCFS**

The electronically controlled small instantaneous water heater for single washbasin taps

# Additionally ...

## Click-plus function key

With the Click-plus function key the cleaning respectively fill mode can be activated and the water follow-up time and sensor sensitivity can be set. The hygienic flush is also easily adjustable.

## Click function key

The water follow-up time, sensor sensitivity and hygienic flush are adjustable with the sunk Click function key.



## **Touch function key**

The cleaning or filling mode can be activated with the Touch function key and the water follow-up time and sensor sensitivity can be set. The hygienic flush is also easily adjustable.

## **New products**

Shows the CONTI+ novelties of the year





# WATER MANAGEMENT

CONTI+ CNX Water Management System & Service APP








# CNX Water Management System

# **CNX Water Management System applications**

Especially suitable for buildings that require drinking water installations offering high functionality and levels of hygiene, such as:

- Swimming pools
- Schools and sports arenas
- Army barracks
- Hotels
- Doctor's surgeries, hospitals, care and retirement homes
- Drinking water installations in the commercial sector and administrative buildings
- Sanitary facilities with specific nonstandard operating requirements

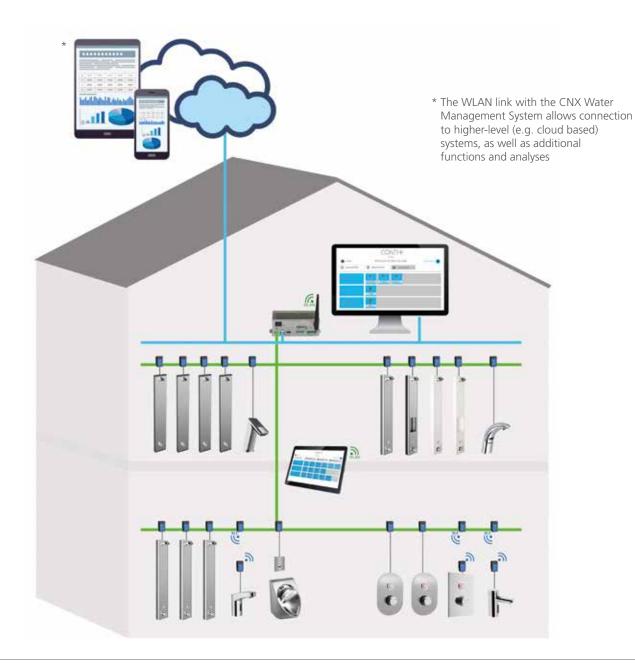

# CONTI+ Network eXchange (CNX)

The CNX product series - new, top-of-the-range, modular and electronic. Proven CONTI+ showers, as well as lavatory faucets and urinal flush valves from the CONTI+ range, can all be linked to networks.

Intelligent technical building systems that can connect and control components of the drinking water installation are becoming ever more important. The CNX controller enables the centralised control of up to 150 devices within a range of up to 350 metres. Via wireless operation, using the tablet included in the standard delivery, it is possible to change settings, call up status information, activate individual and group functions and access recorded data. Reports are saved in PDF format and can be printed and sent easily.

# Wireless Water Management

The web server integrated into the CNX controller provides a user friendly overview of all networked devices in the building.

Devices that have been linked to the network can be located and controlled via a WLAN connected tablet or laptop, either individually or in groups. Current operating status, forthcoming action and notifications are all clearly visible on the display.

When online, each faucet receives updates automatically; when offline, updates can be implemented via tablet, for example. All internet-enabled devices can be operated via web browser, regardless of the operating system installed.



# Advantages of CNX Water Management System:

- One controller for up to 150 devices
- Integration of electronic devices from the CONTI+ range
- Generous network topology (up to 350 m)
- Electrical installation low cost, in a linear, star or tree layout
- Based on stable KNX technology
- · Tablet included
- intuitive, straightforward user interface
- Data transferred via LAN, WLAN
- Lifecycle data storage

- Reports in PDF format or CSV format, saved to SD card
- No loss of data in the event of a power cut
- Connecting to building management systems
- Supports and ensures correct operation within the drinking water installation
- Protected against short circuit and reverse
- Easy integration and installation tailored to individual requirements; user-friendly service
- Device monitor

# Simply, fast and secure




# Topology

The topology offers an easy networking for all devices: individually in a linear-, star- or tree layout. Neither terminators nor special bus cables are required. The standard cables, piped in empty conduits or flush-mounted, are quickly connected to the waterproof single-wire terminals. Additional shielding of cable is not required.



Note: Topology not for CONPRIMUS

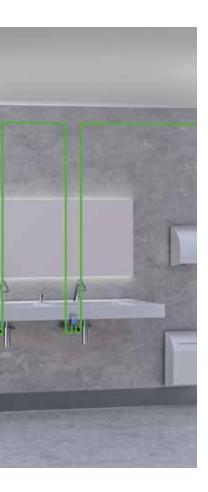





CNX Control unit 30V DC

What is undoubtedly essential, however, is that the correct temperature, water replacement and flow rate are provided and maintained. These interacting parameters are regarded as the ones which have the most significant effect on the hygiene quality of drinking water at a microbiological level, according to generally accepted local engineering standards. The CNX Water Management System actively influences these parameters.

# Hygienic flush

While hygiene is an important issue, centralised control is a must. The settings for flush duration, interval and water follow-up time for every tap installed in the system can be set via a mobile device or PC thanks to the CNX system.



# Thermal disinfection

Safety is the buzzword for thermal disinfection. As a result, the system only permits the thermal flushing procedure to be triggered at defined times that can be controlled via the tablet, in line with the technical standards. The complete process is monitored, recorded and can be printed.



# Faucet management

Devices can be added, reassigned within groups or moved thanks to a clearly structured menu. An overview of parameters set for each faucet can be viewed on the tablet.




# Application example

# ROOM 1

### **Showers**

- With thermostat
- Thermal disinfection (TD) via bypass solenoid valve
- Temperature measurement and logging for thermal disinfection
- Connection to the CNX Water Management System via cable (LAN) or in further expansion wireless (WLAN)
- Cable connection via converter for power supply and data transmission

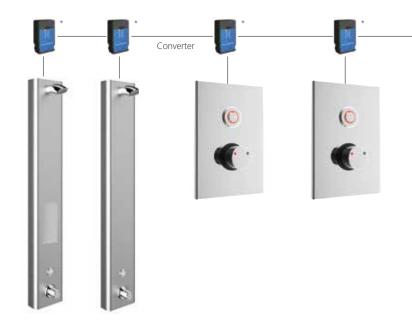

# ROOM 2

### Urinal flush valves and lavatory faucets

- With IR sensor
- Action log (e.g. for hygienic flush)
- Connection to the CNX Water Management System via cable (LAN) or in further expansion wireless (WLAN)
- Cable connection via converter for power supply and data transmission





# Central control unit CNX 64 or CNX 150

- · Control and data recording
- Device and data management
- Service and management functions
- Web server for browser display (tablet, smartphone, PC, Laptop ...)
- Depending on selected model up to 64 or 150 devices
- SD card slot for data backup
- 6x I/O Ports
- USB for Service Wireless Adapter
- Internet connection via LAN (for remote maintenance and software updates)
- Power supply
- Optional connection key switch




# Software control and operating unit

- Operating unit: tablet (included in delivery) or smartphone, laptop, PC
- Display of the control panel via web browser
- Intuitive, modern smartphone menu navigation and operation of all functions (see system description)

## Central control unit CNX 150









#### Central control unit CNX 150

Power supply and control for max. 150 CNX devices, including separate tablet PC as central operating unit, with integrated web server, browser address for integration, adjustment, control, monitoring and logging of all devices. Data transmission via LAN and WLAN, wired ready for connection, connection cable with Schuko plug, suitable for wall mounting. Generous variable line topology up to 350 m in flexible line, star or tree structure

#### Feature Overview:

- Water flow time: adjustment for normal operation, hygienic flush and thermal disinfection
- · Hygienic flush: choice, setting and combination options (manual, usage and calendar-
- Thermal disinfection: automatic, variable execution, with temperature logging in PDF format with optional temperature sensors
- Cleaning shutdown: manual or optional via external contact
- Operating and fault messages stored in PDF format
- Voltage supply unit

#### Consisting of:

- Housing: made of plastic with door, RAL 7035
- CNX controller with proprietary robust bus system, with LAN connection as well as WLAN antenna, SD card for lifelong data backup, potential-free inputs for: Start of the thermal flush for disinfection (TD), TD successful message, collective error message, inputs for TD abort, deactivation shower operation and acknowledgment collective error message
- Tablet: with menu-driven innovative user interface, integrated clock- and calendar function
- Tablet functions: integration, administration, operation, querying, setting and monitoring of the entire system, groups or individual devices locally via touch screen and Internet web browser, with user logon, export function of system and status logs

Input voltage: 230 V / 50 Hz 26 - 28 V/DC Output voltage: Current consumption: 2A Power consumption max: 0,1 kW

Communication: 1 x USB, 1 x Ethernet,

web server for a web client

Protection class: Protection type: IP 65

300x300x160 mm Dimensions (WxHxD):

The electrical wiring may only be carried out by a qualified electrician

#### Required accessories:

CONO220000 connecting line

Description	Version	Article number	EUR
Central control unit CNX 150	Up to 150 devices	CONO151000	8.172,00

# Central control unit CNX 64



## Central control unit CNX 64

Power supply and control for max. 64 CNX devices, including separate tablet PC as central operating unit, with integrated web server, browser address for integration, adjustment, control, monitoring and logging of all devices. Data transmission via LAN and WLAN, wired ready for connection, connection cable with Schuko plug, suitable for wall mounting. Generous variable line topology up to 350 m in flexible line, star or tree structure

#### Feature Overview:

- Water flow time: adjustment for normal operation, hygienic flush and thermal disinfection
- Hygienic flush: choice, setting and combination options (manual, usage and calendardependent)
- Thermal disinfection: automatic, variable execution, with temperature logging in PDF format with optional temperature sensors
- Cleaning shutdown: manual or optional via external contact
- Operating and fault messages stored in PDF format
- Voltage supply unit

#### Consisting of:

- Housing: made of plastic with door, RAL 7035
- CNX controller with proprietary robust bus system, with LAN connection as well as WLAN antenna, SD card for lifelong data backup, potential-free inputs for:

  Start of the thermal flush for disinfection (TD), TD successful message, collective error message, inputs for TD abort, deactivation shower operation and acknowledgment collective error message
- Tablet PC: with menu-driven innovative user interface, integrated clock- and calendar function
- Tablet functions: integration, administration, operation, querying, setting and monitoring of the entire system, groups or individual devices locally via touch screen and Internet web browser, with user logon, export function of system and status logs


Input voltage: 230 V / 50 Hz
Output voltage: 26 - 28 V/DC
Current consumption: 2A
Power consumption max: 0,1 kW

Communication: 1 x USB, 1 x Ethernet, web server for a web client

Protection type: IP 65


Dimensions (WxHxD): 300x300x160 mm

The electrical wiring may only be carried out by a qualified electrician



Protection class:

CONO220000 connecting line






Description	Version	Article number	EUR
Central control unit CNX 64	Up to 64 devices	CONO141000	2.528,00

# Central control unit CNX 64 mit Touch-Display







### Central control unit CNX 64 with touchscreen

Power supply and control for max. 64 CNX devices, including touchscreen as central operating unit, with integrated web server, browser address for integration, adjustment, control, monitoring and logging of all devices. Data transmission via LAN and WLAN, wired ready for connection, connection cable with Schuko plug, suitable for wall mounting. Generous variable line topology up to 350 m in flexible line, star or tree structure

#### Feature Overview:

- Water flow time: adjustment for normal operation, hygienic flush and thermal disinfection
- Hygienic flush: choice, setting and combination options (manual, usage and calendar-dependent)
- Thermal disinfection: automatic, variable execution, with temperature logging in PDF format with optional temperature sensors
- · Cleaning shutdown: manual or optional via external contact
- Operating and fault messages stored in PDF format
- · Voltage supply unit

#### Consisting of:

- Housing: made of plastic with door, RAL 7035
- CNX controller with proprietary robust bus system, with LAN connection as well as WLAN
  antenna, SD card for lifelong data backup, potential-free inputs for:
  Start of the thermal flush for disinfection (TD), TD successful message, collective error message, inputs for TD abort, deactivation shower operation and acknowledgment collective
  error message
- Touchscreen: with menu-driven innovative user interface, integrated clock- and calendar function
- Touchscreen: integration, administration, operation, querying, setting and monitoring of the entire system, groups or individual devices locally via touch screen or Internet web browser, with user logon, export function of system and status logs

Input voltage: 230 V / 50 Hz
Output voltage: 26 - 28 V/DC
Current consumption: 2A
Power consumption max: 0,1 kW

Communication: 1 x USB, 1 x Ethernet,

web server for a web client

Protection class: I Protection type: IP 65

Dimensions (WxHxD): 300x300x160 mm

The electrical wiring may only be carried out by a qualified electrician

# Required accessories:

CONO220000 connecting line

Description	Version	Article number	EUR
Central control unit CNX 64 with touchscreen	Up to 64 devices	CONO144918	4.562,00

# **CNX** Converter



# CNX Converter 6 V

To integrate CONTI+ faucets (with the exception of CONPRIMUS and lino PRIMUS upright faucet L40) into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 30 V to 6 /12 V.

Operating voltage: 30 V/DC Input: Approx. 17 mA Protection: IP68 Notice: CONO214641 includes:Flush-mounted socket for masonryFlush-mounted socket for dry construction

Description	Material	Article number	EUR
CNX Converter 6V	Plastic	CONO210000	177,00
CNX Converter for flush-mounted socket 6V	Plastic	CONO214641	275,00



## CNX Converter 12 V

To integrate CONTI+ faucets CONPRIMUS and lino PRIMUS upright faucet L40 into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 24V to 12V.

Operating voltage: 12 V/DC Input: Approx. 17 mA Protection: IP68

**Notice:** CONO211012 includes:
• Flush-mounted socket for masonry

• Flush-mounted socket for dry construction

Description	Material	Article number	EUR
CNX Converter 12 V (CONPRIMUS)	Plastic	CONO210012	177,00
CNX Converter for flush-mounted socket 12V	Plastic	CONO211012	275,00

# Cable J-Y(St)Y



# Cable J-Y(St)Y, 2x2x0,8 mm

For electrical wiring of CONTI+ showers, lavatory faucets and urinal flush valves

Outside coat: PVC, grey
Outer diameter: 7 mm

Temperature range: -30 °C to 70 °C, shielding by foil

Description	Packaging unit	Article number	EUR
Cable J-Y(St)Y, 2x2x0,8 mm	100 m	CONO220000	149,00





## CONTI+ Service APP

#### Intuitive APP based control of individual faucets


Both new and existing drinking water installations need to meet numerous hygiene requirements – in Germany, for example, the German Drinking Water Ordinance (TrinkwV) 2018. With our CONTI+ Service APP, we offer an effective means to extend the necessary programming, logging and documentation of the required hygiene measures to the control units of the individual faucets.

The Service APP allows convenient management of CONTI+ shower panels, concealed showers, washbasin and urinal faucets. Thanks to the user friendly and intuitive interface, faucets can be identified and selected for very straightforward management, programming and data readings.

The APP guides users systematically and logically through all menu items and

features so that they can program sanitary rinses, check and set water running times, optimise sensor ranges, save settings and usage data, and more. Used in conjunction with the BLE Converter, secure communication is established via Bluetooth® between the faucet and the required device (e.g. smartphone or tablet). All this can be done wirelessly, easily, intelligently and securely.

# FEATURES Bluetooth® Wireless communication between Service APP and faucets via the BLE Converter Intuitive operation License management feature, software interface, analyses and graphics Extensive services Programming, logging and maintenance

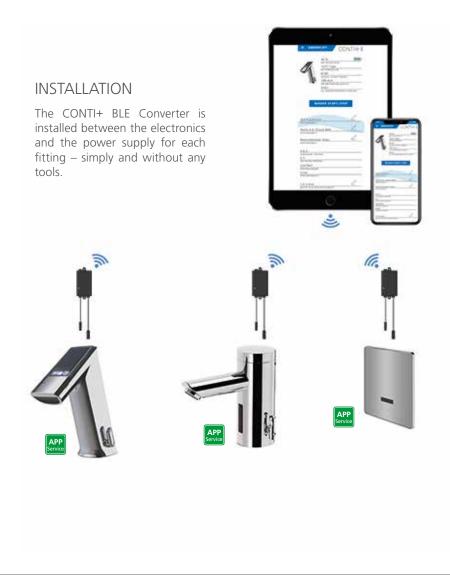





#### **FUNCTIONALITIES**

## Displays & evaluations per valve: - Battery status

- Operating hours
- Number of uses
- Number of hygiene flushings
- Water consumption

#### Parameter settings per valve:

- Water run time & water after-run time
- Filling mode & cleaning stop
- Mode & running time of the flush
- · Restart delay
- Sensor range stages
- Information on the installation pointTime-controlled hygiene flush,
- one flush time per each weekday
- Interval-use dependent hygiene flushing
- Max. water running time (safety shutdown)
- Data for the calculation of water consumption
- Password protection can be activated





#### BLE Converter for Service APP



#### BLE Converter for CONTI+ Service APP

To build up a Bluetooth® connection between CONTI+ faucets and a mobile control unit as smartphone or tablet. Smart faucet connection via CONTI+ Service APP.

Displays & evaluations per valve:

- Battery status and operating hours
- Number of uses
- Number of hygiene flushings
- Water consumption
- Max. water temperature (only in special cases)

Parameter settings per valve:


- Water run time & water after-run time
- Filling mode & cleaning stop
- Mode & running time of the flush
- Restart delay
- Sensor range stages
- Information on the installation point
- Time-controlled hygiene flush, one flush time per each weekday
- · Interval-use dependent hygiene flushing
- Max. water running time (safety shutdown)
- Data for the calculation of water consumption
- Password protection can be activated

#### Technical data:

Bluetooth® low energy

Operating voltage: 6-12 V/DC Protection: IP68


The CONTI+ Service APP (Android and iOS) is available for all CONTI+ products (washbasin faucets with extended connection cable, mains and VARIOconnect versions) in the current price list manufactured as of 2018.

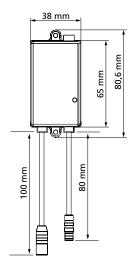



Description	Colour	Article number	EUR
BLE Converter	Black	CONO260000	67,00



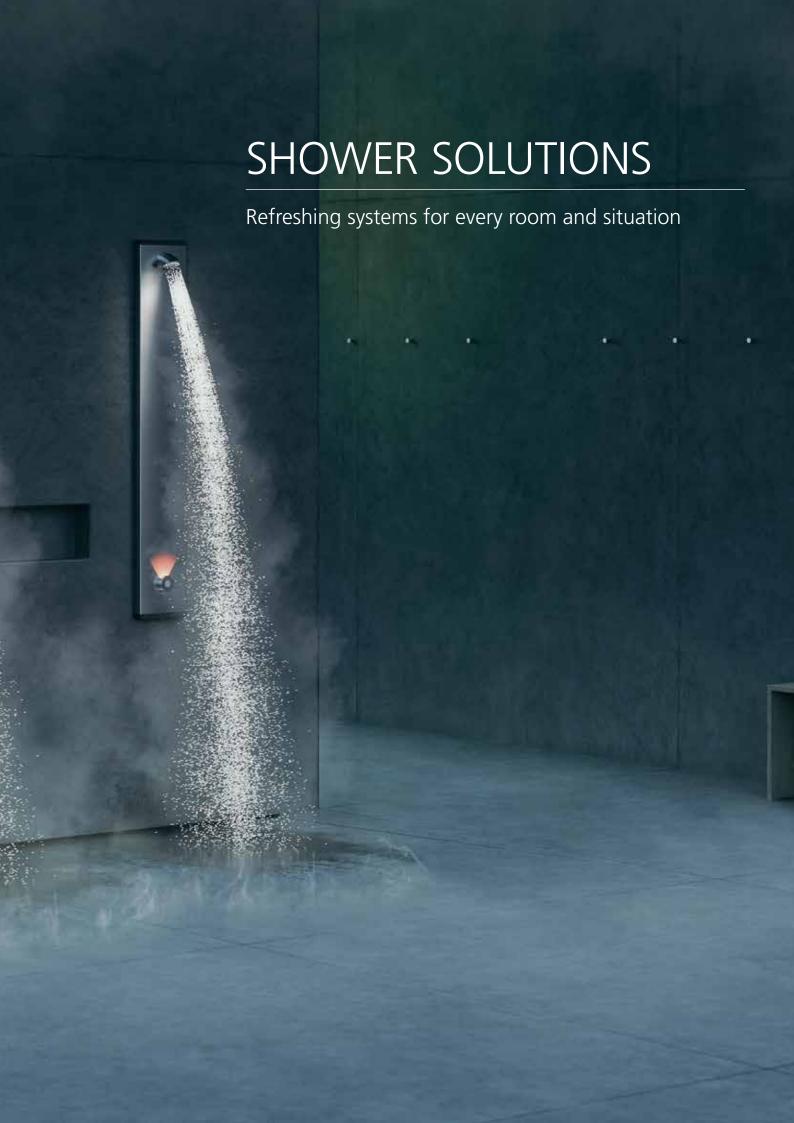





# System description CONPRIMUS

## E-Thermostat water path CONPRIMUS

#### **CONPRIMUS** - Hygiene at high level.

When choosing a shower panel based on the CONTI+ E-Thermostat CONPRIMUS there is a main hygiene innovation - the thermostatic mixing at the height of the shower head. A very short standing water column which successfully prevent the mixed water for microbiological contamination. The E-Thermostat water path CONPRIMUS combines hygiene functions like cool hygiene and thermal flush with safety function of electronic scalding protection. Smart water management of E-Thermostat water path CONPRIMUS by CONTI+ Service APP or integration into CNX.

CONPRIMUS shower panels stand for hygiene, safety and design.

Temperature sensor

for monitoring all temperatures

Variable types of connection With flexible hoses from above or behind

#### Water inlet

(patent pending)
Mixing chamber directly
on the shower head,
therefore minimal
water column

Installation/maintenance Mark indicating installation height, large maintenance area

#### Thermostat-E

Fully electronic mixer (free of dead space) allows separate cold water rinse, sanitary rinse with selectable target temperature and thermal disinfection with hot water



Alternative water outflow for handheld shower

Material Compliant with drinking water standards

Electronic anti-scalding protection regulated by integral temperature sensor

Servomotors for temperature and volume control

Hot and cold water connections Plug-in connections with fuse

# CONPRIMUS shower panel

## Design alternatives and combination possibilities

Based on the E-Thermostat water path CONPRIMUS - unsurpassed in terms of hygiene and smart handling/service/operation.



COVER MATERIALS	stainless steel matt
COVER DESIGNS	without soap dish
WATER PATH	CONPRIMUS E-Thermostat water path mounting on back wall
WATER PIPELINE	nominal size DN15 flexible hoses
SHUT-OFF VALVE	direct from front
WATER FLOW TRIGGER ELECTRONIC	E-control (piezo button)
E-THERMOSTAT	with electronic scalding protection
FUNCTIONS (subsequent upgrades possible)	cold flush hygienic flush thermal flush, electronic cleaning stop
FAUCET MANAGEMENT	CNX Water Management System, Service APP
SHOWER HEADS	rain shower heads hand shower set
CONVERSIONS	to CNX Water Management System to Service APP
MAINTENANCE	completely possible from front

# System description CONGENIAL

## Adaptive multifunctional water path CONGENIAL

#### Make the right choice with the CONTI+ adaptive multifunctional water path CONGENIAL.

When choosing a shower variant based on the CONTI+ adaptive multifunctional water path there are many options for extending and modifying the shower and service functionalities in the short, medium and long term due to the many conversion and upgrade options. From simple mechanic opening and closing function via self-closing oil or water hydraulics through to electronic version via piezo switch. CONGENIAL offers interchangeable options in all directions.

The conversion options with respect to the water flow trigger mechanisms are only one strong argument for the decision - the CONTI+ adaptive multifunctional water path CONGENIAL also allows a variety of upgrades. From manual, through electronic thermal flush to integration into the CONTI+ CNX Water Management System to secure and document all hygiene functions.

CONGENIAL one water path for three concealed variants - CONBOX, CONBOX FLANGE and CONBOX FIT.

CONTI+ adaptive multifunctional water path CONGENIAL one solution - wide-ranging fields of application, maximum installation comfort and extensive functionality transfer.



## Operating and hygiene function upgrades

Variant options thanks to standardised technology

#### Fixing

at the rear on panels of concealed showers, service access at the front

#### Materials

compliant with standards for drinking water installation



Straightforward servicing and reduced stocking of spare parts thanks to common components in all CONTI+ faucets, including ROBUST solenoid valve

#### Thermostat


Safety when showering thanks to thermostatic cartridge for anti-scalding protection

Standard-compliant non-return valves and filters to prevent contamination

# CONGENIAL shower panels

## Design alternatives and combination possibilies

Based on the adaptive multifunctional water path CONGENIAL - unsurpassed in terms of conversion and upgrade options and serviceability.



COVER MATERIALS	stainless steel mat, acrylic composite (on request Varicor)
COVER DESIGNS	without soap dish with soap dish
WATER PATH	CONGENIAL multifunctional water path mounting on back wall
WATER PIPELINE	nominal size DN15 solid copper piping
SHUT-OFF VALVE	direct from front
WATER FLOW TRIGGER ELECTRONIC	piezo button
WATER FLOW TRIGGER MECHANIC	water hydraulic oil hydraulic on/off-handle
THERMOSTAT	with scalding protection
FUNCTIONS (subsequent upgrades possible)	hygienic flush hygienic flush external (Key Switch) thermal flush, manual thermal flush, electronic cleaning stop
FAUCET MANAGEMENT	CNX Water Management System
SHOWER HEADS	jet shower heads rain shower heads hand shower set stainless steel options
CONVERSIONS	from mechanical to electronic from electronic to mechanical to CNX Water Management System
MAINTENANCE	completely possible from front without removal of the water path

# **CONGENIAL** concealed showers

## Design alternatives and combination possibilities

Based on the adaptive multifunctional water path CONGENIAL - unmatched in terms of conversion, upgrade options and serviceability.



COVER MATERIALS	stainless steel mat
COVER DESIGNS	round angular
WATER PATH	CONGENIAL multifunctional water path mounting on concealed box back wall
WATER PIPELINE	nominal size DN15 brass piping
SHUT-OFF VALVE	direct from front
WATER FLOW TRIGGER ELECTRONIC	piezo button
WATER FLOW TRIGGER MECHANIC	water hydraulic on/off-handle
THERMOSTAT	with scalding protection
FUNCTIONS (subsequent upgrades possible)	hygienic flush hygienic flush external (Key Switch) thermal flush, manual thermal flush, electronic cleaning stop
FAUCET MANAGEMENT	CNX Water Management System
SHOWER HEADS	jet shower heads rain shower heads hand shower set stainless steel options
CONVERSIONS	from mechanical to electronic from electronic to mechanical to CNX Water Management System
MAINTENANCE	completely possible from front without removal of the water path

# CONGENIAL FIT concealed showers


## Design alternatives and combination possibilities

Based on the adaptive multifunctional water path CONGENIAL - unsurpassed in terms of conversion and upgrade options and compactness.




COVER MATERIALS	stainless steel mat stainless steel chromed
COVER DESIGNS	round angular oval
WATER PATH	CONGENIAL multifunctional water path mounting on concealed box rear wall
WATER PIPELINE	nominal size DN15 brass piping
SHUT-OFF VALVE	direct from front
WATER FLOW TRIGGER ELECTRONIC	piezo switch
WATER FLOW TRIGGER MECHANIC	water hydraulic on/off-handle
THERMOSTAT	with scalding protection
FUNCTIONS (subsequent upgrades possible)	hygienic flush hygienic flush external (Key Switch) thermal flush, manual thermal flush, electronic cleaning stop
FAUCET MANAGEMENT	CNX Water Management System
SHOWER HEADS	jet shower heads tain shower heads hand shower set stainless steel options
CONVERSIONS	from mechanical to electronic from electronic to mechanical to CNX Water Management System
MAINTENANCE	completely possible from front without removal of the water path

# Installation & maintenance with front access – quick and easy

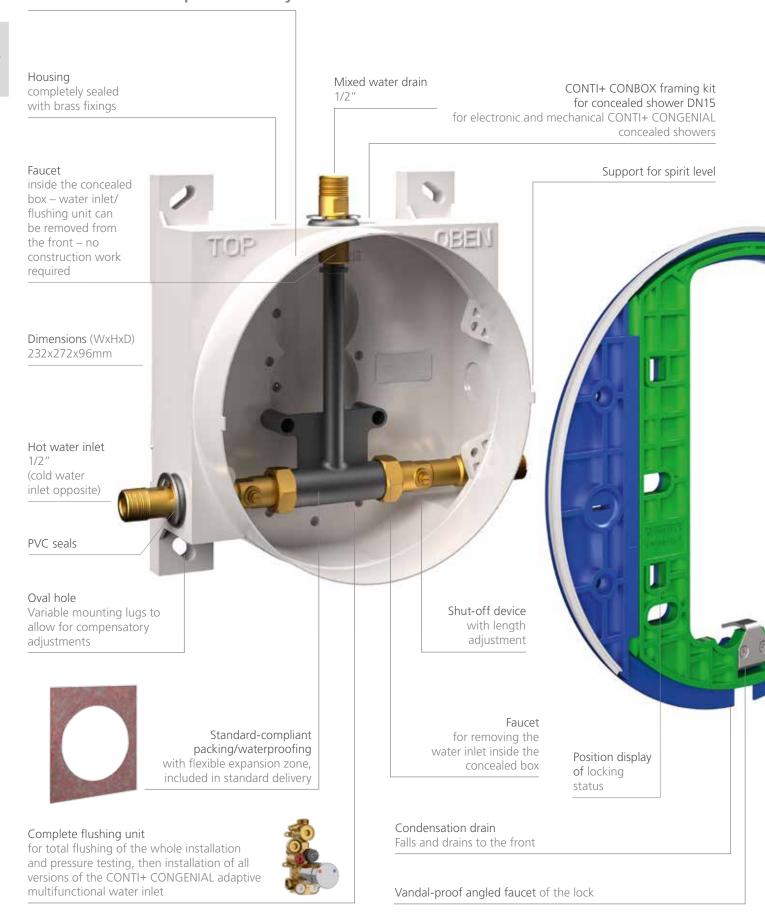


## CONTI+ CONGENIAL concealed shower

## The large scale solution: room for servicing

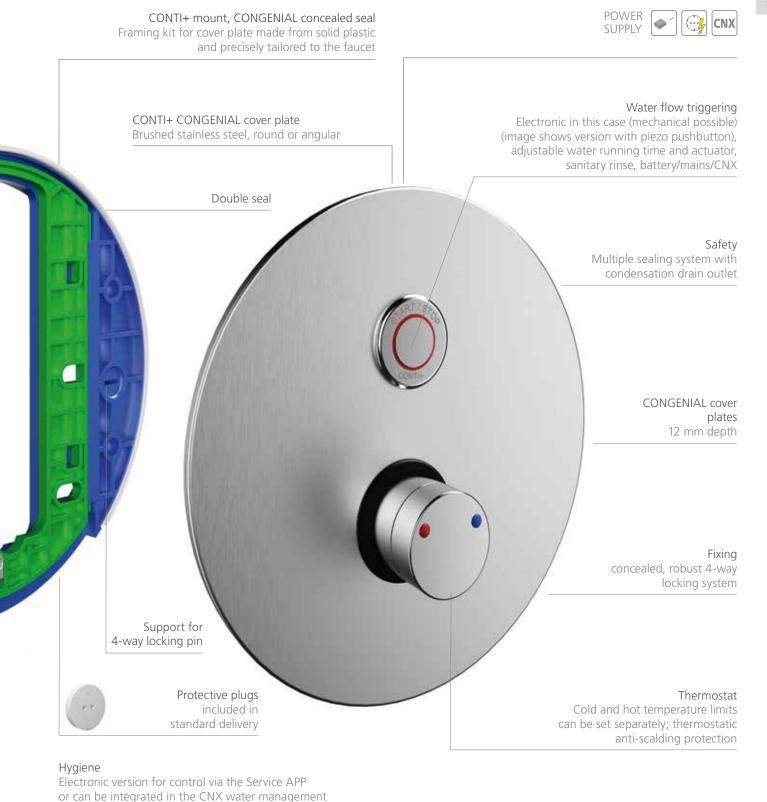

system for further functions

# Installation & maintenance with front access – quick and easy

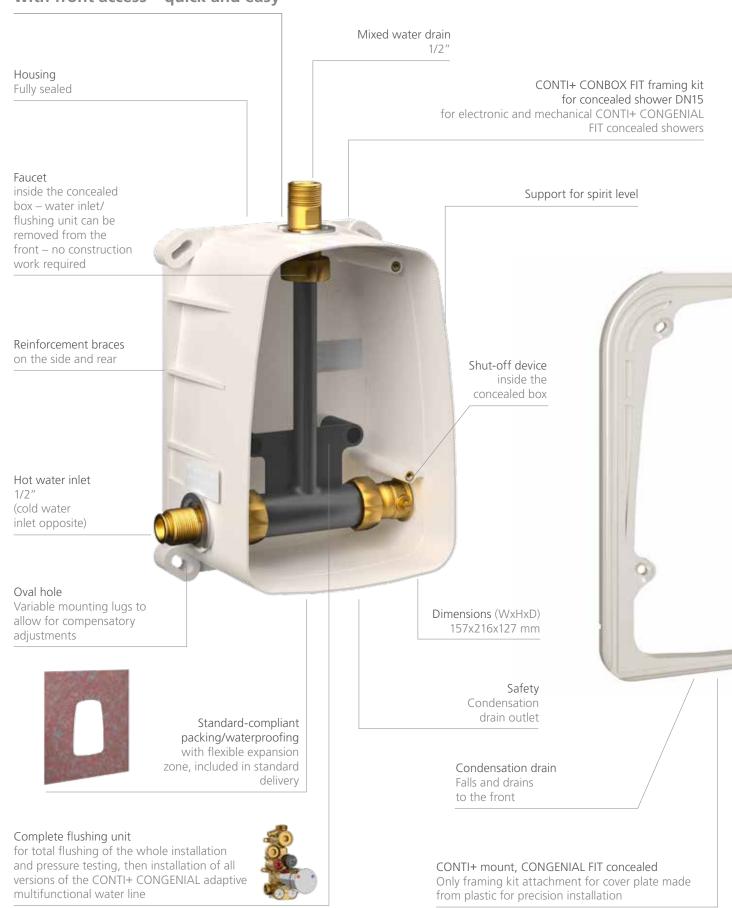

# CONTI+ CONGENIAL FIT concealed shower

The small solution: versatile and functional



# System description CONSMART

### Compact water path CONSMART

Electronic shower panels with the compact water path CONSMART offer high functionality. Time-controlled hygiene flushing, the thermal disinfection which can be activated via key switch as well as integration into the CONTI+ CNX Water Management System via calendar-triggered hygiene functions, meet the requirements of a hygienically sensitive drinking water installation.

CONTI+ compact water path CONSMART - one solution for a wide variety of projects with variable functional requirements.

#### Materials

compliant with requirements for drinking water installation

Straightforward servicing and reduced stocking of of spare parts thanks to common components in all CONTI+ faucets, including ROBUST solenoid valve

Electronic version – Control and hygiene upgrade functions



Hot and cold water inlet
with flexible hoses for safe
yet adaptable installation

M
possible witho

Maintenance of shower panel possible without disassembling water inlet

# CONSMART shower panels

## Design alternatives and combination options

Based on the adaptive multifunctional water path CONSMART - extremely functional and reliable



COVER MATERIALS	stainless steel mat acrylic composite
COVER DESIGNS	without soap dish# with soap dish (AVW only)
WATER PATH	CONSMART multifunctional water path mounting on concealed box rear wall
WATER PIPELINE	nominal size DN15 flexible hoses
WATER FLOW TRIGGER ELECTRONIC	piezo button
THERMOSTAT	with scalding protection
FUNCTIONS (subsequent upgrades possible)	hygienic flush hygienic flush external (Key Switch) thermal flush, electronic cleaning stop
FAUCET MANAGEMENT	CNX Water Management System
SHOWER HEADS	jet shower heads rain shower heads hand shower set stainless steel options
CONVERSIONS	to CNX Water Management System
MAINTENANCE	partly without removal of the water path

# **CONBASE** concealed showers

## Design alternatives and combination possibilities

Based on the water path CONBASE - reliable for premixed or cold water (DN15). Versioin without thermostat.



COVER MATERIALS	stainless steel mat
COVER DESIGNS	round angular
WATER PATH	water path CONBASE mounting on concealed box
FITTING	nominal size DN15 brass piping
SHUT-OFF VALVE	direct from front
WATER FLOW TRIGGER ELECTRONIC	piezo button
FUNCTIONS (subsequent upgrades possible)	hygienic flush cleaning stop
SHOWER HEADS	jet shower heads rain shower heads hand shower set stainless steel options
MAINTENANCE	completely possible from front without removal of the water path
MAINTENANCE	stainless steel options  completely possible from front without removal of the

# **CONBASE** concealed showers

## Design alternatives and combination possibilities

Based on the water path CONBASE - easy and compact for premixed or cold water in DN15 and DN20.



COVER MATERIALS	chromed brass
COVER DESIGNS	round small
WATER PATH	water path CONBASE mounting wall or ceiling
FITTING	nominal size DN15 and DN20 brass piping
WATER FLOW TRIGGER ELECTRONI	C piezo button
FUNCTIONS (subsequent upgrades possible)	hygienic flush
SHOWER HEADS	jet shower heads rain shower heads hand shower set special versions
MAINTENANCE	without removal of the water path



COVER MATERIALS	chromed brass
COVER DESIGNS	rosette
WATER PATH	CONBASE shower mounting wall or ceiling
FITTING	nominal size DN15and DN20 brass piping
WATER FLOW TRIGGER ELECTRONIC	water hydraulikc
SHOWER HEADS	jet shower heads rain shower heads hand shower set stainless steel options
MAINTENANCE	without removal of the water path

# Functional options for showers

## Overview shower solutions (not all features combinable)









	FUNC	ΓΙΟΝΑL	. CHARACTI	ERISTICS					
	Nomina	al width	Water flow actuation					Resource-saving functions	
			Self-closing function, electronic		Self-closing function, mechanical		mechanical		e
Shower solutions	DN15	DN20	Piezo switch (CONPRIMUS E-control)	RHD	Water hydraulics	Oil hydraulics	On/off- handle	Paid water discharge	Adjustable water flow time
SHOWER PANEL	LS								
CONPRIMUS	•		•						•
	•		•						•
CONGENIAL	•				•				•
CONGENIA	•					•			•
	•						•		
CONFRESH	•		•						•
CONSMART	•		•						•
CONCHIP	•			•				•	•
CONCASH 2.0	•		•					•	•
CONCEALED SH	IOWER:	S							
	•		•						•
CONGENIAL	•				•				•
	•					•			•
	•						•		
	•		•		_				•
CONGENIAL FIT	•				•	•			•
	•					•	•		_
		•	•				•		•
CONFLOW		•	•						•
	•		•						•
CONBASE	•					•			•
	•		•						•
CONBASE SLIM		•	•						•
	•				•				•
CONBASE MINI		•			•				•
CONCHIP	•		•	•				•	•
CONCASH 2.0	•		•					•	•
EXPOSED SHOV	EXPOSED SHOWERS								
COLUDE	•				•				•
CONPRO	•						•		
CONBASE SLIM	•		•						•
tipolino	•		•						•

Service functions	Hygiene and safety functions								
Cleaning stop/ operation stop (CNX)	Cold flush and cold water monitoring	Thermostat with scald protection (CONPRIMUS E-thermostat)	Hygienic flush	Hygienic flush externally via key switch	Manual thermal hygienic flush (thermal flush)	Electronic thermal hygienic flush via key switch (thermal flush)	Electronic thermal hygienic flush CNX (thermal flush)	CNX Water Management System	Service APP
•	•	•	•			•	•	•	•
•		•	•	•	•	•	•	•	•
		•			•	0			•
		•			•	0			•
		•	•	•	, , , , , , , , , , , , , , , , , , ,	<u> </u>		•	•
• • •		•	•	• • •	• • •	• *•	• •	• • •	•‡•
		•	•						
		•	•			•			
•		•	•	•	•	•	•	•	•
		•			•	0			•
		•			•	0			•
		•			•	0			•
•		•	•	•	•	•	•	•	•
		•			•	0			•
		•			•	0			•
		•			•	0			•
		•	•			•	•	•	•
			•					•	•
			•					•	_
			•					•	•
			•					•	•
									•
									•
		•	•						
		•	•			•			
		•							
		•							
			•					•	•
		•	•						

 $<sup>\</sup>bullet = \text{standard feature} \ | \ o = \text{optional feature} \ | \ \overset{\bullet}{\bullet} = \text{retrofittable}$ 





#### **Electronic showers**

Shower panels	
CONPRIMUS	60
CONGENIAL	62
CONFRESH Fresh water station	68
CONSMART	72
CONBASE	76
CONCASH 2.0	78
Concealed showers - final assembly kits	
CONGENIAL	
CONGENIAL FIT	
CONBASE	
CONBASE SLIM	
CONCASH 2.0	
CONCASH FIT 2.0	
Exposed shower faucets	
CONBASE SLIM	
tipolino	114
Freestanding showers	
CONFREE straight   curved	116
CONFREE straight I curved Accessories	





220 mm



Thermostat-E: fully electronic mixer directly on the shower head minimal water column

Separate sanitary rinses: cold water rinse, sanitary rinse (mixed water) and thermal disinfection, free of dead space if required

> No pipework between control unit and shower head

Slimline design 40 mm stainless steel cover

> Electrical connection between control unit and mixer

Electronic anti-scalding protection

E-Control: electronic control unit: press for start/stop, turn to adjust temperature (automatic shut-off)

LED temperature display



1400 mm


























#### CONPRIMUS shower panel, stainless steel, thermostat-E, E-control, DN15





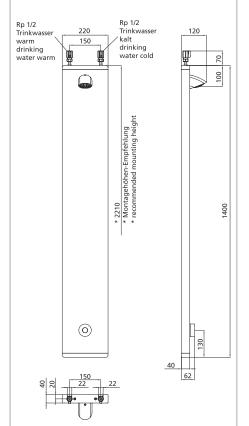

#### CONPRIMUS shower panel, stainless steel, thermostat-E, E-control, DN15

Shower panel with electronically controlled mixing device, including scald protection, for wall mounting. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Pre-installed electronic mixing unit thermostat-E
- · Proportional valve mixing unit at shower head height
- Electronic scald protection
- Electronic control unit E-control, turn/push button for mixing and start/stop function
- Temperature adjustment with LED display
- Non-linear temperature adjustment
- Adjustable shower start temperature
- Time-adjustable memory temperature when showering stops
- Pre-equipped for shower heads with plug-in connection or hand shower pre-assembled on delivery
- Electronic hygiene rinsing (mixed water temperature)
- Electronic hygiene flushing (cold water side) via CNX or Service APP
- Electronic thermal disinfection (hot water side) via CNX or Service APP
- Integration into the CNX Water Management System
- · Control via Service APP possible
- · Connection from above or behind
- Incl. mounting material

Mains supply (single installation): Power supply via 12 V/DC power supply unit in surface-

mounted version in installation box or for DIN rail

mounting

Mains supply (multiple installation): Power supply via 24 V/DC power supply unit in sur-

face-mounted version in installation box or for DIN rail

mounting

Mains supply (CNX): Power supply via 30 V/DC power supply unit in the

Control units 64 and 150 and additional 24 V/DC auxiliary

power supply

#### **Execution options:**

#### Water flow times

The water running times of the shower function can be set - via piezo push-button (E-control) or integrated into the CNX Water Management System as well as via the Service APP - by the parameter settings per shower or shower fitting group (CNX).

#### Hygienic flush

The hygiene flush can be carried out by programming via piezo push-button (E-control). Integrated into the CNX Water Management System or via the Service APP, the hygiene flush can be set as an interval or calendar function and deactivated by parameter settings per shower or shower fittings group (CNX).

#### Cold water flush\*:

Cold water flush can be set and deactivated per shower or shower group (CNX) as an interval or calendar function using the parameter settings, either integrated in the CNX Water Management System or via the Service APP.

#### Thermal disinfection:

Thermal disinfection can be set as a calendar function for each shower or shower group (CNX) - integrated in the CNX Water Management System or via the Service APP\* - using the parameter settings for each shower or shower group (CNX).

#### Cleaning stop

The operating stop (cleaning stop), interruption of the shower function, can be set as a calendar function per shower or shower group (CNX) through the parameter settings integrated in the CNX Water Management System or via the Service APP\*.

#### **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

\*Available with software update

#### CONPRIMUS shower panel, stainless steel, thermostat-E, E-control, DN15

#### Technical data:

Operating voltage

(mains, single installation): 12 V/DC

Operating voltage

Preset temperatures:

(mains, multiple installation): 24 V/DC

Operating voltage (CNX): 30 V/DC, additional 24 V/DC

Operating pressure: 2.0-5.0 bar

Water temperature (max.): 70 °C (short-term for TD 80 °C Flow rate DN15: 0.15 l/s (flow rate controller)

Flow rate for thermal disinfection DN15: 0.05 l/s Water run time setting range: 3-180 s Water running time factory setting: 30 s

Hygienic flushing setting range: factory setting: deactivated, 24, 48 or 72 h,

adjustable via piezo button, CNX or Service APP Stand-by temperature when piezo button is triggered 38 °C (can be adjusted from 100 % cold to max. 43 °C (temperature range) via

E-Control rotation.

If the cold water line fails, the water flow is stopped when 48 °C is reached (factory setting - can be set via Service APP and CNX, observe

maximum water temperature).

Memory temperature setting: after the end of the shower time (or stop by pressing the piezo button again), the set temperature remains

stored for 30 s

Electronic protection class: IP68

Dimensions (WxHxD): 220x1400x40 mm

Shower head or hand shower must be ordered separately, shown here as an example with CONHEAD rain shower head SHORTY

#### Required accessories:

Shower head, hand shower set, central mains power supply and/or CNX central operation unit

#### Optional accessories:

CNX Converter 12 V, BLE Converter,

Cover extension

#### Note

The temperature sensor is already included in the delivery.


		HYG	COLD	<b>TD</b> <sub>E</sub>	<b>TD</b> <sub>E</sub>	<b>\$</b>				
Versions	Power supply	Hygienic flush	String flushing Cold water	Therm. disinfec- tion (electronic)	Thermal disinfection CNX	Cleaning stop	Service APP	Article number for version handheld shower	Article number for version shower head	EUR
	12 V/DC series wiring to connect to central mains power supply 550.045.00 (see Asseccories)	•						CONE1211219500	CONE1111219500	2.015,00
	24 V/DC series wiring to connect to central mains power supply CONO513000 (see Asseccories)	•	•	•		•	АРР	CONE1211219580	CONE1111219580	2.338,00
CNX	30 V/DC bus cabling to CNX central operating unit 24 V/DC auxiliary power supply additional	•	•		•	•	CNX	CONE1211219568	CONE1111219568	2.747,00
. heads	See chapter shower heads	CONHEAD rain shower head SHORTY							CONO030010	144,00
Shower heads		CONHEAD handshower set						CONO040010		444,00

#### CONGENIAL shower panel, stainless steel, thermostat, piezo switch, DN15







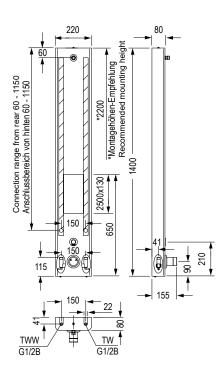

#### CONGENIAL shower panel, stainless steel, thermostat, piezo switch, DN15

With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover and mounting frame made of stainless steel 1.4301
- All visible surfaces made of brushed stainless steel
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

#### **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish.

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

#### Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

#### Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

#### Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

#### Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

#### Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

#### Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

#### **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

#### CONGENIAL shower panel, stainless steel, thermostat, piezo switch, DN15

#### Technical data:

6 V/DC Operating voltage (battery): 12 V/DC Operating voltage (mains): 30 V/DC Operating voltage (CNX): Operating pressure: 1,5-5,0 bar 70 °C

Water temp. standard operation (max.): Water temp. thermal disinfection: Flow rate DN15:

Flow rate during thermal disinfection DN15:

Water flow time setting range: Water flow time factory setting:

Hygienic flush setting range:

Hygienic flush factory setting:

Electronic protection type: Dimensions (HxWxD):

Short-term for therm. disinfection 80 °C 0,15 l/s (flow rate regulator)

0,05 l/s (flow rate regulator)

3-180 s

30 s 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals can be set via Service APP 12 h after last water flow activation, 30 s

water flow time

IP68

1400x220x80 mm

#### Required accessories:

Shower head, hand shower set, central mains power supply or CNX central operation unit

#### **Optional accessories:**

Connection set Cover extension Manual TD plug for thermal disinfection (see chapter accessories)

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

		HYG		<b>TD</b> <sub>E</sub>	<b>TD</b> <sub>E</sub>					
Versions	Power supply	Hygienic flush	Hygienic flush key switch	Therm. disinfection (electronic)	Thermal disinfection CNX	Cleaning stop	Integrated shelf	Article number for version handheld shower	Article number for version shower head	EUR
	6 V/DC Lithium battery waterproof encased	•					•	CONE0212211100	CONE0112211100	1.416,00
		•				•	•	CONE0212211140	CONE0112211140	1.700,00
		•						CONE0211211100	CONE0111211100	1.280,00
		•				•		CONE0211211140	CONE0111211140	1.435,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•					•	CONE0212211200	CONE0112211200	1.507,00
		•	•				•	CONE0212211210	CONE0112211210	1.485,00
		•		•			•	CONE0212211230	CONE0112211230	1.637,00
		•				•	•	CONE0212211240	CONE0112211240	1.655,00
		•						CONE0211211200	CONE0111211200	1.280,00
		•	•					CONE0211211210	CONE0111211210	1.347,00
		•		•				CONE0211211230	CONE0111211230	1.500,00
		•				•		CONE0211211240	CONE0111211240	1.435,00
	30 V/DC bus cabling to CNX central operating unit (see chapter accessories)	•				•	•	CONE0212211336	CONE0112211336	1.894,00
CNX		•			•	•	•	CONE0212211360	CONE0112211360	1.954,00
CNX		•				•		CONE0211211336	CONE0111211336	1.758,00
		•			•	•		CONE0211211360	CONE0111211360	1.816,00
Shower heads	See chapter shower heads	CONHEAD jet shower head GOLF							CONO010010	175,00
		CONHEAD rain shower head RAIN2							CONO020010	222,00
		CONHEAD rain shower head SHORTY							CONO030010	144,00
ower		CONHEAD jet shower head VESUV							CONO060010	175,00
She		CONHEAD jet shower head CITY							CONO050010	175,00
			CONF	IEAD ha	nd show	er set		CONO040010		444,00

#### CONGENIAL shower panel, AVW, thermostat, piezo switch, DN15
















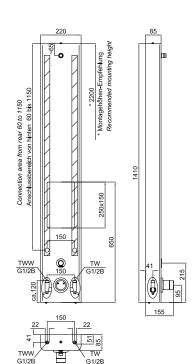

#### CONGENIAL shower panel, AVW, thermostat, piezo switch, DN15

With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- AVW shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover 2K-acrylic composite material, dimensions (HxWxD): 1410x220x85 mm, break-proof and impact resistant, very easy to clean
- Mounting frame made of stainless steel 1.4301
- · Multifunction tool for maintenance work
- · Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- · Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
  - Electronic operation of the shower function via piezo button with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time of the shower function is easily adjustable.
- · Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

#### **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish.

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

#### Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

#### Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

#### Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

#### Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

#### Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

#### Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

#### **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

#### CONGENIAL shower panel, AVW, thermostat, piezo switch, DN15

#### Technical data:

6 V/DC Operating voltage (battery): 12 V/DC Operating voltage (mains): 30 V/DC Operating voltage (CNX): Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Flow rate DN15:

Flow rate during thermal disinfection DN15:

Water flow time setting range: Water flow time factory setting: Hygienic flush setting range:

Hygienic flush factory setting:

Electronic protection type: Dimensions (HxWxD):

Short-term for therm. disinfection 80 °C 0,15 l/s (flow rate regulator)

0,05 l/s (flow rate regulator)

3-180 s

30 s 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals can be set via Service APP 12 h after last water flow activation, 30 s

water flow time

IP68

1400x220x80 mm

#### Required accessories:

Shower head, hand shower set, central mains power supply or CNX central operation unit

#### **Optional accessories:**

Connection set Cover extension Manual TD plug for thermal disinfection

(see chapter accessories)

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

		HYG		<b>TD</b>	TD <sub>E</sub>					
Versions	Power supply	Hygienic flush	Hygienic flush key switch	Therm. disinfection (electronic)	Thermal disinfection CNX	Cleaning stop	Integrated shelf	Article number for version handheld shower	Article number for version shower head	EUR
	6 V/DC Lithium battery waterproof encased	•					•	CONE0232211100	CONE0132211100	1.280,00
		•				•	•	CONE0232211140	CONE0132211140	1.435,00
		•						CONE0231211100	CONE0131211100	1.120,00
		•				•		CONE0231211140	CONE0131211140	1.418,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•					•	CONE0232211200	CONE0132211200	1.280.00
		•	•				•	CONE0232211210	CONE0132211210	1.347,00
		•		•			•	CONE0232211230	CONE0132211230	1.500,00
		•				•	•	CONE0232211240	CONE0132211240	1.435,00
		•						CONE0231211200	CONE0131211200	1.114,00
		•	•					CONE0231211210	CONE0131211210	1.103,00
		•		•				CONE0231211230	CONE0131211230	1.258,00
		•				•		CONE0231211240	CONE0131211240	1.262,00
	30 V/DC bus cabling to CNX central operating unit (see chapter accessories)	•				•	•	CONE0232211336	CONE0132211336	1.758,00
CNX		•			•	•	•	CONE0232211360	CONE0132211360	1.816,00
CIVA		•				•		CONE0231211336	CONE0131211336	1.517,00
		•			•	•		CONE0231211360	CONE0131211360	1.573,00
Shower heads	See chapter shower heads	CONHEAD jet shower head GOLF							CONO010010	175,00
		CONHEAD rain shower head RAIN2							CONO020010	222,00
		CONHEAD rain shower head SHORTY							CONO030010	144,00
		CONHEAD jet shower head VESUV							CONO060010	175,00
S		CONHEAD jet shower head CITY							CONO050010	175,00
		CONHEAD hand shower set						CONO040010		444,00



# For properties with cold water connection

Heating water return HRL

Heating water flow HVL

Hot water spout

PWH (mixed water)

PWC (potable water cold)

Cold water inlet

Choice of 7 different shower heads



Circulation bridge

The thermostatic circulation bridge ensures instant provision of the heating medium for domestic hot water heating. The flow temperature is adjustable from 35 °C to 65 °C. Whenever the temperature falls below the set flow temperature, the thermostat opens so that the heating medium can circulate and, if water is drawn off, energy can be used immediately for domestic hot water heating.

Plate heat exchanger

Differential pressure regulator

For hydronic balancing, i.e. to maintain the pressure differential needed to heat the water via the module.

Proportional flow controller

Only opens the drinking water (cold water) and heating water media flows via the heat exchanger if hot water is drawn off. The valve closes once no more water is to be drawn off, thereby preventing further heating of the heat exchanger.

CONTI+ CONGENIAL adaptive multifunctional water inlet System: battery, mains or CNX

**POWER SUPPLY** 



















## CONFRESH shower panel, stainless steel, thermostat, piezo switch, DN15, fresh water station














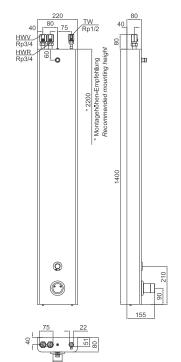

## CONFRESH shower panel, stainless steel, thermostat, piezo switch, DN15, fresh water station

Electronic shower faucet designed as shower panel in nominal diameter DN15. Integrated fresh water station for the production of warm, decentralised and directly in the shower panel produced drinking water. Hot water generation via plate heat exchanger by supplying heating water. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Version with mounting frame to accommodate the water section, including fixing material; cover and mounting frame made of stainless steel 1.4301
- All visible surfaces: brushed stainless steel
- · Multifunctional tool for maintenance work
- Fresh water station: integrated circulation bridge for heating water circuit
- DVGW-approved proportional flow regulator and differential pressure regulator
- Piping for heating water: Stainless steel corrugated pipe
- Pipelines drinking water: copper and flexible hoses
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- · Upgrade and retrofitting functions
- Fitting body: dezincification resistant pressed brass, as a high-quality thermostat battery; thermostat handle: chrome-plated brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo button with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

6V Lithium waterproof encased, lifetime up to 4 years Battery:

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64

and 150

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## CNX Water Management System:

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

# CONFRESH shower panel, stainless steel, thermostat, piezo switch, DN15, fresh water station

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar

Water temp. standard operation (max.): 70 °C
Water temp. thermal disinfection: Short-te

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via

setting on piezo switch, other hygienic flush intervals can be set via Service

Monitor

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Power fresh water station

(plate heat exchanger): 35 kW

Hot water preparation

Standard conditions: with 65 °C heating water flow

Heating flow (max.): 80 °C
Hot water temperature - side Input: 10 °C
Drinking water temperature - side Output: 45 °C
Pressure loss heat exchanger unit: 0.22 bar
Electronic protection type: IP68

Dimensions (HxWxD): 1400x220x80 mm

#### Required accessories:

Shower head, hand shower set, central mains power supply or CNX central operation unit

## **Optional accessories:**

Cover extension

		HYG	<b>**</b>			
Version	Power supply	Hygienic flush	Cleaning stop	Article number for version handheld shower	Article number for version shower head	EUR
	6 V/DC Lithium battery waterproof encased	•		CONE0211211150	CONE0111211150	2.948,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•		CONE0211211250	CONE0111211250	2.948,00
CNX	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•	•	CONE0211211356	CONE0111211356	3.015,00
		CONHEAD jet sh	ower head GOLF		CONO010010	175,00
ds		CONHEAD rain sh	nower head RAIN2		CONO020010	222,00
Shower heads	See chapter	CONHEAD rain sho	ower head SHORTY		CONO030010	144,00
Jowe	shower heads	CONHEAD jet sho	ower head VESUV		CONO060010	175,00
S		CONHEAD jet sh	nower head CITY		CONO050010	175,00
		CONHEAD ha	nd shower set	CONO040010		444,00



# Reliable quality - convincing price




# CONSMART shower panel, stainless steel, thermostat, piezo switch, DN15









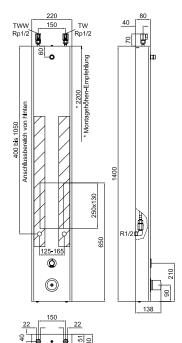

## CONSMART shower panel, stainless steel, thermostat, piezo switch, DN15

Electronic shower faucet designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Model with two wall brackets, including mounting material
- Upper wall bracket with 90° hold from both sides for cover for mounting and maintenance work
- Wall bracket made of stainless steel 1.4301
- · Multifunction tool for maintenance work
- Shower head Shorty in scope of delivery
- Water path CONSMART with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functionalities
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Functional parts can be serviced without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

### **Execution options:**

#### Cover version:

Without seamlessly integrated soap dish

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP (not in scope of delivery) per shower.

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s
Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on

piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flush time IP68

Electronic protection type: IP6

Dimensions (WxHxD): 220x1410x85 mm

## Required accessories:

Central mains power supply

# CONSMART shower panel, stainless steel, thermostat, piezo switch, DN15


		<b>♦</b> ♦♦ HYG		
Version	Power supply	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	CONE4111221109	1.080,00
	12 V/DC series wiring to connect to central mains power supply	•	CONE4111221209	1.080,00

# Asseccories optional for CONSMART shower panel, AVW

	Used for	Description	Article number	EUR
	Integration Service APP	BLE Converter for Service APP for CONTI+ faucets per shower panel 1 piece	CONO260000	67,00
		CNX Converter, 30 V – 6 V for connecting CONTI+ faucets per shower panel 1 piece	CONO210000	177,00
	Electronical	Switch key per control box 1 piece	CONO330000	259,00
essories)	thermal disinfection via CNX	Temperature sensor for CONSMART water path per shower panel 1 piece	CONO410010	54,00
pter Acce		Solenoid valve II per shower panel 1 piece	CONO320000	166,00
Accessories for CONSMART (see also chapter Accessories)		Set thermal disinfection for CONTI+ faucets with mains power supply per shower panel 1 piece	CONO322000	346,00
SMART (s	Electronical thermal disinfection via key switch	Key switch per main supply per power supply unit 1 piece	CONO330010	257,00
for CON		Solenoid valve per shower panel 1 piece	CONO320000	166,00
cessories	Manual thermal disinfection	Manual plug TD per shower panel 1 piece	CONO310000	117,00
Ac	Integration of cleaning stop	Set cleaning stop per shower panel 1 piece	CONO610000	232,00
	Soap dishes	Soap dish stainless steel, 220x40/15x65 mm, for wall installation	CONO680000	91,00
	soap disnes	Soap dish ABS silver mat, 162x41x62 mm, for wall and panel installation	CONO681000	91,00
	Cover extension	Stainless steel	CONO660000	on request

# CONSMART shower panel, AVW, thermostat, piezo switch, DN15



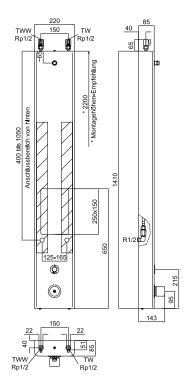

## CONSMART shower panel AVW, thermostat, piezo switch, DN15

Electronic shower faucet designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- AVW shower panel. Model with two wall brackets, including mounting material
- Upper wall bracket with 90° hold from both sides for cover for mounting and maintenance work
- Cover 2K-acrylic composite material, dimensions, break-proof and impact resistant, very easy to clean
- Wall bracket made of stainless steel 1.4301
- Multifunction tool for maintenance work
- Shower head Shorty in scope of delivery
- Water path CONSMART with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functionalities
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- · Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Functional parts can be serviced without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

## **Execution options:**

#### Cover version:

With or without seamlessly integrated soap dish

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP (not in scope of delivery) per shower.

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on

piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flush time

Electronic protection type: IP68

Dimensions (WxHxD): 220x1410x85 mm

## Required accessories:

Central mains power supply


# CONSMART shower panel, AVW, thermostat, piezo switch, DN15

		HYG			
Version	Power supply	Hygienic flush	Integrated soap dish	Article number	EUR
	6 V/DC Lithium battery	•		CONE4131221109	924,00
	waterproof encased	•	•	CONE4132221109	1.080,00
	12 V/DC series wiring to connect to	•		CONE4131221209	924,00
	central mains power supply	•	•	CONE4132221209	1.080,00

# Asseccories optional for CONSMART shower panel, AVW

	Used for	Description	Article number	EUR
	Integration Service APP	BLE Converter for Service APP for CONTI+ faucets per shower panel 1 piece	CONO260000	67,00
		CNX Converter, 30 V – 6 V for connecting CONTI+ faucets per shower panel 1 piece	CONO210000	177,00
	Electronical	Switch key per control box 1 piece	CONO330000	259,00
essories)	thermal disinfection via CNX	Temperature sensor for CONSMART water path per shower panel 1 piece	CONO410010	54,00
pter Acce		Solenoid valve II per shower panel 1 piece	CONO320000	166,00
Accessories for CONSMART (see also chapter Accessories)		Set thermal disinfection for CONTI+ faucets with mains power supply per shower panel 1 piece	CONO322000	346,00
SMART (s	Electronical thermal disinfection via key switch	Key switch per main supply per power supply unit 1 piece	CONO330010	257,00
for CON		Solenoid valve per shower panel 1 piece	CONO320000	166,00
cessories	Manual thermal disinfection	Manual plug TD per shower panel 1 piece	CONO310000	117,00
AG	Integration of cleaning stop	Set cleaning stop per shower panel 1 piece	CONO610000	232,00
	Soap dishes	Soap dish stainless steel, 220x40/15x65 mm, for wall installation	CONO680000	91,00
	soap disnes	Soap dish ABS silver mat, 162x41x62 mm, for wall and panel installation	CONO681000	91,00
	Cover extension	AVW	CONO661000	on request

# CONBASE shower panel, stainless steel, piezo switch, DN15

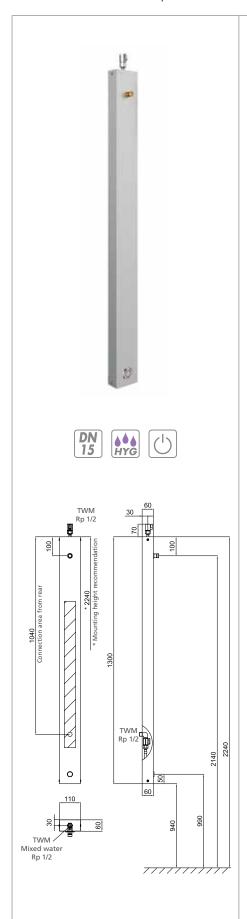

## CONBASE shower panel, stainless steel, piezo switch, DN15

Electronic shower faucet designed as shower panel in nominal diameter DN15. For connection to premixed water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Cover and mounting angles made of stainless steel 1.4301
- · All visible surfaces brushed stainless steel
- Water line with solenoid valve 6 V/DC ROBUST, bistable, DN15
- Electronic operation of the shower function via piezo switch with start/stop function; Piezo switch: colour ring red, rosette high-gloss chrome-plated
- The water flow time of the shower function is easily adjustable.
- Connection possible from above or from rear
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6 V lithium, waterproof encased; life up to 4 years Mains: Power supply via 12 V/DC power supply unit

#### **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via piezo switch or Service APP per shower.

# CONBASE shower panel, stainless steel, piezo switch, DN15

#### Technical data:

6 V/DC Operating voltage (Battery): Operating voltage (mains): 12 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

0,15 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting:

Hygienic flush setting range: 12, 24 oder 72 h, can be deactivated via

setting on piezo switch, other hygienic flush intervals can be set via Service APP 12 h after last water flow activation,

Hygienic flush factory setting: 30 s water flow time

Electronic protection class:

Dimensions: (WxHxD) 110x1370x60 mm

#### Required accessories:

Shower head, hand shower set, central mains power supply unit



Version	Power supply	Hygienic flush	Article number for version shower head	EUR
Battery	6 V/DC Lithium battery waterproof encased	•	CONE0110173100	602,00
Mains	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•	CONE0110173200	658,00
		CONHEAD jet shower head GOLF	CONO010010	175,00
eads		CONHEAD rain shower head RAIN2	CONO020010	222,00
Shower heads	See chapter shower heads	CONHEAD rain shower head SHORTY	CONO030010	144,00
Shov		CONHEAD jet shower head VESUV	CONO060010	175,00
		CONHEAD jet shower head CITY	CONO050010	175,00

# CONCASH 2.0 shower panel, stainless steel, thermostat, piezo switch, DN15












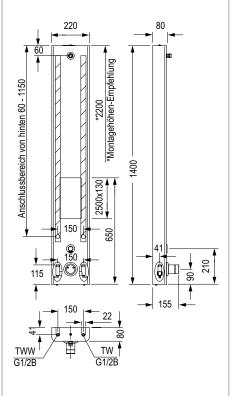

# CONCASH 2.0 shower panel stainless steel, thermostat, piezo switch, DN15, mains, paid water release

Electronic shower faucet for electronically controlled paid water release. Designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Model with two wall brackets, including mounting material
- Cover and wall bracket made of stainless steel 1.4301
- All visible surfaces made of brushed stainless steel
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be dismantled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator

Mains:

Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting

#### **Execution options:**

## Cover versions:

With or without seamlessly integrated soap dish.

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out by CONCASH showers through programming via the coin validator.

#### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.

# CONCASH 2.0 shower panel, stainless steel, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (mains): 24 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Dimensions (HxWxD):

Water flow time setting range (max.): Hygienic flush setting range: via the coin validator Electronic protection type: 1,5-5,0 bar 70 °C 0,15 l/s (flow rate regulator)

1000 min 0-240 s

IP68

1400x220x80 mm

### Required accessories:

Shower head, hand shower set, central mains power supply CONCASH 2.0 coin validator

#### Optional accessories:

Connection set Cover extension Tokens


		A A A HYG	€ CASH				
Version	Power supply	Hygienic flush	Paid water release	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
24 V/DC series wiring	•	•		CONE0811211270	CONE0711211270	1.828,00	
	(see accessories)	•	•	•	CONE0812211270	CONE0712211270	2.235,00
		CONHEAD je	et shower head G	GOLF		CONO010010	175,00
Sp		CONHEAD ra	in shower head F	RAIN2		CONO020010	222,00
Shower heads	See chapter	CONHEAD rair	n shower head SI	HORTY		CONO030010	144,00
lower	shower heads	CONHEAD je	t shower head V	ESUV		CONO060010	175,00
Sh		CONHEAD j	et shower head (	CITY		CONO050010	175,00
		CONHEA	D hand shower se	et	CONO040010		444,00

# CONCASH 2.0 shower panel, AVW, thermostat, piezo switch, DN15







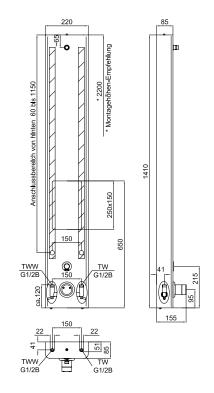

## CONCASH 2.0 shower panel AVW, thermostat, piezo switch, DN15, mains, paid water release

Electronic shower faucet for electronically controlled paid water release. Designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- AVW shower panel. Model with wall brackets for mounting the water path, including mounting material
- Cover 2K-acrylic composite material, break-proof and impact resistant, very easy to clean
- Wall bracket made of stainless steel 1.4301
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- · Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be dismantled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator

Mains:

Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting

## **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish.

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out by CONCASH showers through programming via the coin validator.

### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.

# CONCASH 2.0 shower panel, AVW, thermostat, piezo switch, DN15

0,15 l/s (flow rate regulator)

#### Technical data:

Operating voltage (mains): 24 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Water flow time setting range (max.): Hygienic flush setting range: via the coin validator Electronic protection type:

IP68

1000 min

0-240 s

Dimensions (HxWxD): 1410x220x85 mm

### Required accessories:

Shower head, hand shower set, central mains power supply CONCASH 2.0 coin validator

#### Optional accessories:

Connection set Cover extension Tokens

		A A A HYG	€ CASH				
Version	Power supply	Hygienic flush	Paid water release	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
24 V/DC series wiring	•	•		CONE0831211270	CONE0731211270	1.804,00	
	(see accessories)	•	•	•	CONE0832211270	CONE0732211270	2.039,00
		CONHEAD je	et shower head G	GOLF		CONO010010	175,00
Sp		CONHEAD ra	in shower head F	RAIN2		CONO020010	222,00
Shower heads	See chapter	CONHEAD rair	n shower head SI	HORTY		CONO030010	144,00
lower	shower heads	CONHEAD je	t shower head V	ESUV		CONO060010	175,00
Sh		CONHEAD j	et shower head (	CITY		CONO050010	175,00
		CONHEA	D hand shower se	et	CONO040010		444,00

## CONGENIAL concealed shower, stainless steel, round, thermostat, piezo switch, DN15





Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation















Mains (CNX):

Battery:

Mains:

6V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Power supply over 30 V/DC power supply in the control panels 64 and 150

## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

#### Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

#### Thermal disinfection CNX:


The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.



# CONGENIAL concealed shower, stainless steel, round, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80  $^{\circ}$ C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP
Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP68
Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR0112 raw mounting set, alternatively CONR1112, shower head, hand shower set, central mains power supply or CNX central operation unit, CNX Converter, BLE Converter, Key switch for hygienic flush or thermal disinfection (see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection, Extension sets

### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

		HYG		<b>TD</b>	<b>TD</b>			
Version	Power supply	Hygienic flush	Hygienic flush key switch	Therm. disinfec- tion (electronic)	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	6 V/DC Lithium battery	•					CONE2113211100	1.051,00
	waterproof encased	•				•	CONE2113211140	1.204,00
		•					CONE2113211200	1.051,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•	•				CONE2113211210	1.118,00
		•		•			CONE2113211230	1.230,00
		•				•	CONE2113211240	1.204,00
CNX	30 V/DC bus cabling to CNX central operating unit	•				•	CONE2113211336	1.276,00
	(see chapter accessories)	•			•	•	CONE2113211360	1.323,00
		CON	NHEAD je	et showe	r head C	SOLF	CONO010000	175,00
Sp		CON	HEAD ra	in showe	er head F	RAIN2	CONO020000	248,00
Shower heads	See chapter	CONH	IEAD rair	shower	head SI	HORTY	CONO030000	201,00
lower	shower heads	CONHEAD jet shower head VESUV					CONO060000	175,00
Sh		COI	NHEAD j	et showe	er head (	CITY	CONO050000	175,00
		C	ONHEA	) hand s	hower s	et	CONO040000	444,00


# CONGENIAL concealed shower, stainless steel, angular, thermostat, piezo switch, DN15











# CONGENIAL concealed shower, stainless steel, angular, thermostat, Piezo, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- · Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

### Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

#### Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

### **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

# CONGENIAL concealed shower, stainless steel, angular, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC 30 V/DC Operating voltage (CNX): Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Short-term for therm. disinfection 80 °C Water temp. thermal disinfection:

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

0,05 l/s (flow rate regulator) disinfection DN15:

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP 12 h after last water flow activation,

Hygienic flush factory setting: 30 s water flow time

Electronic protection type:

290x260x12 mm Dimensions (HxWxD):

## Required accessories:

CONRO112 raw mounting set, alternatively CONR1112, shower head, hand shower set, central mains power supply or CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection

(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection, Extension sets

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

		_						
		HYG		<b>TD</b> <sub>E</sub>	TD <sub>E</sub>			
Version	Power supply	Hygienic flush	Hygienic flush key switch	Therm. disinfec- tion (electronic)	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	6 V/DC Lithium battery	•					CONE2115211100	1.051,00
	waterproof encased	•				•	CONE2115211140	1.204,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•					CONE2115211200	1.051,00
		•	•				CONE2115211210	1.118,00
		•		•			CONE2115211230	1.230,00
		•				•	CONE2115211240	1.204,00
CNX	30 V/DC bus cabling to CNX central operating unit	•				•	CONE2115211336	1.276,00
CIVA	(see chapter accessories)	•			•	•	CONE2115211360	1.332,00
		CON	NHEAD je	et showe	r head G	SOLF	CONO010000	175,00
qs		CON	HEAD ra	in showe	er head F	RAIN2	CONO020000	248,00
head	See chapter	CONH	IEAD rain	n shower	head SI	HORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV					CONO060000	175,00
Sh		COI	NHEAD j	et showe	er head (	CITY	CONO050000	175,00
		C	ONHEA	D hand s	hower se	et	CONO040000	444,00

## CONGENIAL FIT concealed shower, stainless steel, round, thermostat, piezo switch, DN15



CONGENIAL FIT concealed shower, stainless steel, round, thermostat, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- · Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation



Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150













## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:


The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

## Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.



## CONGENIAL FIT concealed shower, stainless steel, round, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP 12 h after last water flow activation,

Hygienic flush factory setting: 12 h after last water flor 30 s water flow time

Electronic protection type: IP68
Dimensions (ØxD): 260x12 mm

#### Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection


(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

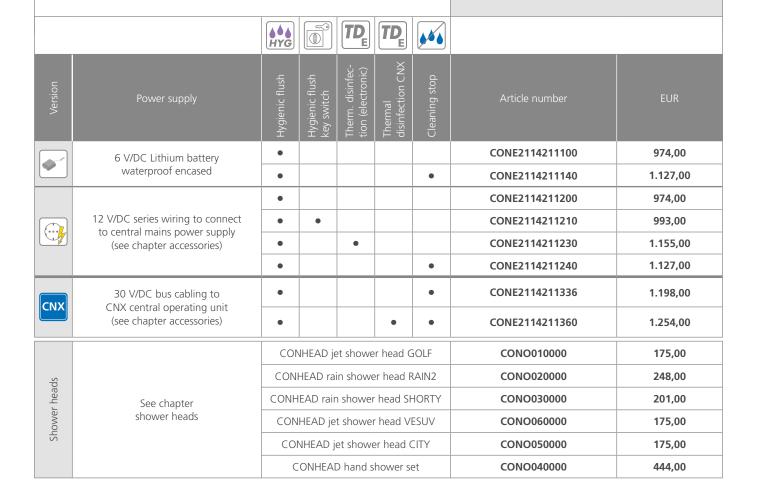

## CONGENIAL FIT concealed shower, chromed, round, thermostat, piezo switch, DN15



## CONGENIAL FIT concealed shower, chromed, round, thermostat, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body

6V Lithium waterproof encased, lifetime up to 4 years

installation box or for DIN top-hat rail mounting

Power supply over 12 V/DC power supply for surface-mounted version in

Power supply over 30 V/DC power supply in the control panels 64 and 150

- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation


















Mains (CNX):

Battery:

Mains:

Hygienic flush (mains/battery): Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:


The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

## Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.



# CONGENIAL FIT concealed shower, chromed, round, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP 12 h after last water flow activation,

Hygienic flush factory setting: 12 h after last water 30 s water flow time

Electronic protection type: IP68
Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection


(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

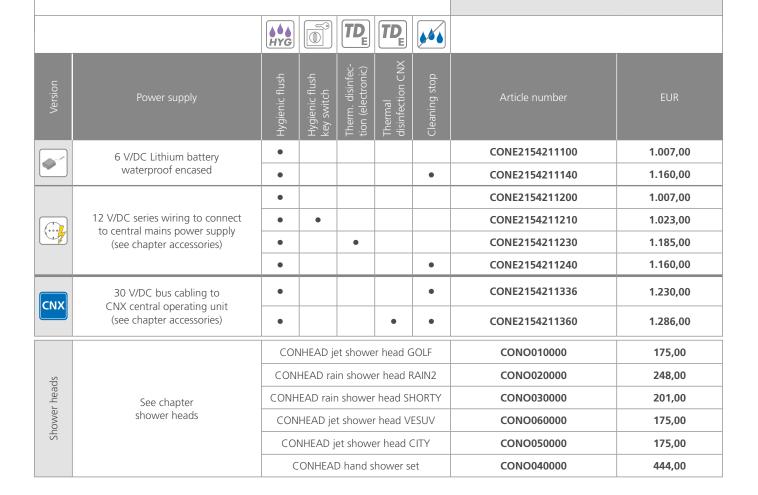


## CONGENIAL FIT concealed shower, stainless steel, angular, thermostat, piezo switch, DN15









# CONGENIAL FIT concealed shower, stainless steel, angular, thermostat, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- · Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

### Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

#### Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

# CONGENIAL FIT concealed shower, stainless steel, angular, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP6

Dimensions (WxHxD): 170x225x10 mm

## Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection


(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

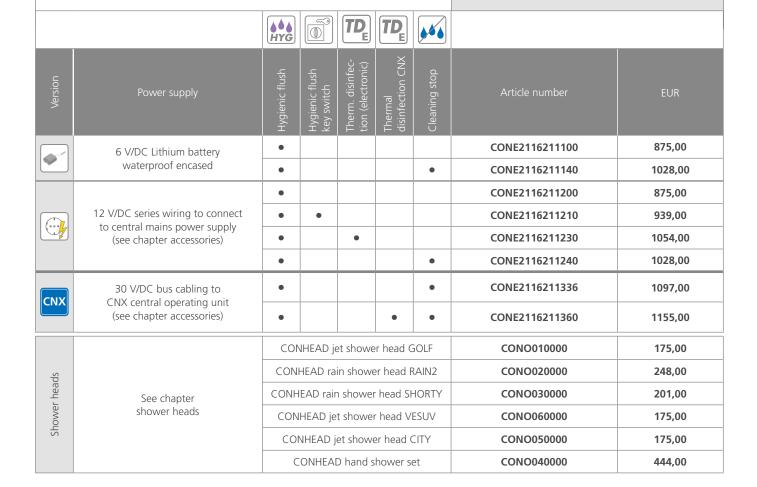


# CONGENIAL FIT concealed shower, chromed, angular, thermostat, piezo switch, DN15









# CONGENIAL FIT concealed shower, chromed, angular, thermostat, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

### **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

#### **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

# CONGENIAL FIT concealed shower, chromed, angular, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC Operating voltage (CNX): 30 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP

12 h after last water flow activation, Hygienic flush factory setting: 30 s water flow time

Electronic protection type:

170x225x10 mm Dimensions (WxHxD):

### Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,


Key switch for hygienic flush or thermal disinfection

(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of

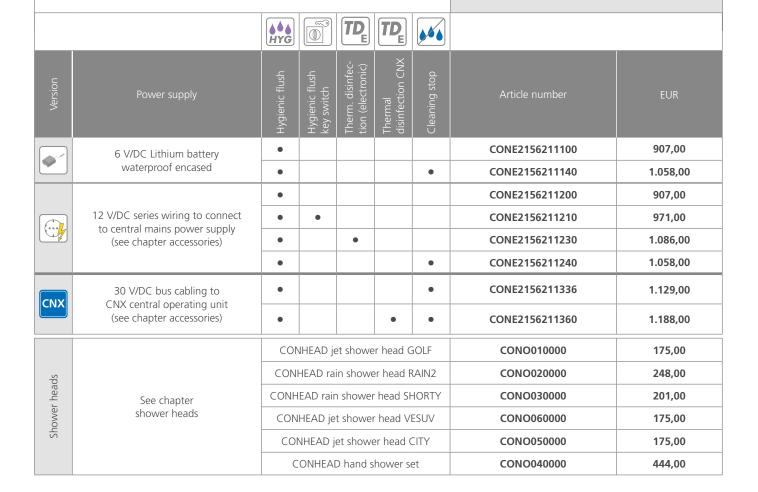

## CONGENIAL FIT concealed shower, stainless steel, oval, thermostat, piezo switch, DN15


















# CONGENIAL FIT concealed shower, stainless steel, oval, thermostat, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as interval or calendar function.

## Thermal disinfection CNX:

The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

## Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

# CONGENIAL FIT concealed shower, stainless steel, oval, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP68

Dimensions (WxHxD): 180x280x10 mm

#### Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection


(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

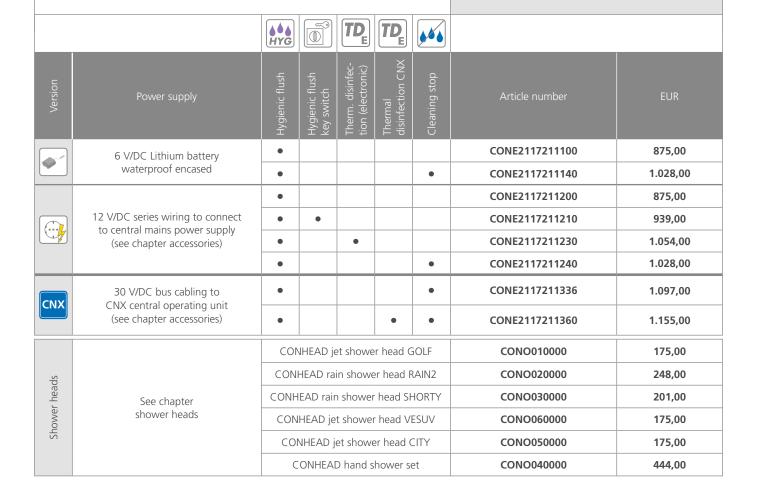

## CONGENIAL FIT concealed shower, chromed, oval, thermostat, piezo switch, DN15





Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL FIT with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body

6V Lithium waterproof encased, lifetime up to 4 years

installation box or for DIN top-hat rail mounting

Power supply over 12 V/DC power supply for surface-mounted version in

Power supply over 30 V/DC power supply in the control panels 64 and 150

- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation















## **Execution options:** Hygienic flush (mains/battery):

Battery:

Mains:

Mains (CNX):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.

## Hygienic flush key switch (mains/battery):

The hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower and can be triggered directly by actuating a key switch.

## Thermal disinfection (mains):

The thermal disinfection in an electronic shower with an installed second bistable solenoid valve 6 V/DC DN15 can be triggered by actuating a key switch.

## Cleaning stop (mains/battery):

The cleaning stop can be activated in electronic showers by positioning a magnet - RC Switch, on the cover respectively cover plate. Shower function via actuation of the piezo switch is interrupted for the time the magnet is positioned there.

## Water flow time CNX:

The water flow time of the shower function can be set and disabled for electronic showers, integrated into the CNX Water Management System, through the software parameter settings per shower or shower group.

## Hygienic flush CNX:

The hygienic flush can be set and disabled for electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as

## Thermal disinfection CNX:


The thermal disinfection can be set as a calendar function in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower group.

## Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the shower function, can be set in electronic showers, integrated into the CNX Water Management System, by the software parameter settings per shower or shower group as a calendar function.

## **CNX Water Management System:**

Integration of the shower into the software-controlled Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.



# CONGENIAL FIT concealed shower, chromed, oval, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP6

Dimensions (WxHxD): 180x280x10 mm

## Required accessories:

CONR0112 raw mounting set, shower head, hand shower set, central mains power supply or

CNX central operation unit, CNX Converter, BLE Converter,

Key switch for hygienic flush or thermal disinfection


(see chapter accessories)

#### **Optional accessories:**

Manual TD plug for thermal disinfection

#### Note:

For the water path CNX with thermal disinfection, the temperature sensor is already included in the scope of delivery.

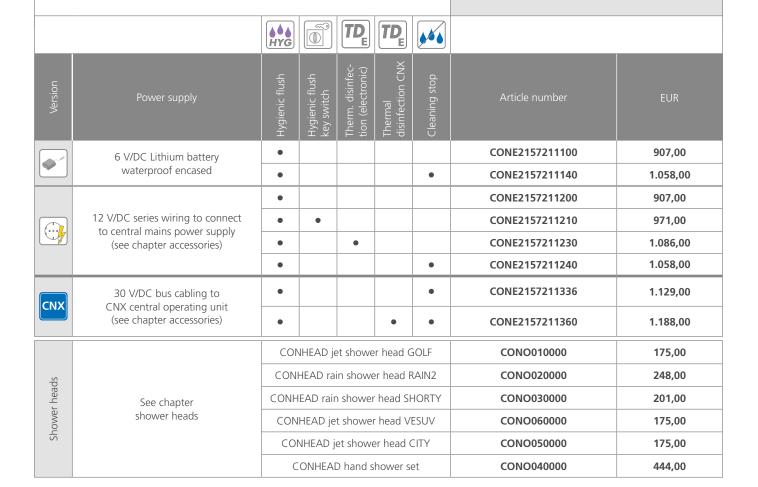

# CONBASE concealed shower, stainless steel, round, piezo switch, DN15



# CONBASE concealed shower, stainless steel, round, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. Without mixing device for connection to cold ore premixed water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (ØxD): 260x12 mm
- Support frame for cover plate: ABS with EPDM lip sealing
- · Multifunction tool for maintenance work
- Water path, in sliding sleeve technology, for tension-free installation of the solenoid valve 6 V/DC ROBUST, bistable, DN15
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting










## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.



# CONBASE concealed shower, stainless steel, round, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC 1,5-5,0 bar Operating pressure:

70 °C Water temp. standard operation (max.):

Flow rate DN15: 0,15 l/s (flow rate regulator) 3-180 s

Water flow time setting range: Water flow time factory setting:

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting

on piezo switch, other hygienic flush intervals

can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: Dimensions (ØxD):

IP68 260x12 mm

#### Required accessories:

CONRO111 raw mounting set Shower head, hand shower set, central mains power supply, BLE Converter

## **Optional accessories:**

CNX Converter

		DN 15	A A A HYG		
Version	Power supply	Connection DN15	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	•	CONE2110173100	624,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•	•	CONE2110173200	624,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
ds		CONHEAD rain sh	nower head RAIN2	CONO020000	222,00
Shower heads	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	144,00
owe	shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

# CONBASE concealed shower, stainless steel, angular, piezo switch, DN15



# CONBASE concealed shower, stainless steel, round, piezo switch, DN15 - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. Without mixing device for connection to cold ore premixed water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (ØxD): 260x12 mm
- Support frame for cover plate: ABS with EPDM lip sealing
- · Multifunction tool for maintenance work
- Water path, in sliding sleeve technology, for tension-free installation of the solenoid valve 6 V/DC ROBUST, bistable, DN15
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red, rosette chrome plated
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Mains: Power supply over 12 V/DC power supply for surface-mounted version in

installation box or for DIN top-hat rail mounting










## **Execution options:**

## Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.



# CONBASE concealed shower, stainless steel, angular, piezo switch, DN15

#### Technical data:

Electronic protection type:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating pressure: 1,5-5,0 bar

Water temp. standard operation (max.): 70 °C

Flow rate DN15: 0,15 l/s (flow rate regulator) Water flow time setting range: 3-180 s

Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation, 30 s water flow time

IP68

Dimensions (WxHxD): 260x290x12 mm

#### Required accessories:

CONR0111 raw mounting set Shower head, hand shower set,

central mains power supply, BLE Converter

## Optional accessories:

CNX Converter

		DN 15	HYG		
Version	Power supply	Connection DN15	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	•	CONE2115133100	624,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•	•	CONE2115133200	624,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
ds		CONHEAD rain sh	nower head RAIN2	CONO020000	222,00
r hea	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	144,00
Shower heads	shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

# CONBASE SLIM concealed shower/ceiling shower, round, piezo switch, DN15



## CONBASE SLIM concealed shower, chromed, round, piezo switch, DN15 final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. Without mixing device for connection to cold ore premixed water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Concealed shower final assembly kit with round cover plate
- Cover plate: chromed, dimensions (ØxD): 95x5 mm, two countersunk screws for fixing
- All functional parts can be disassembled without dismantling the valve body during maintenance work
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red and blue
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

Battery: 6V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted Mains:

version in installation box or for DIN top-hat rail mounting



Solenoid valve 6 V/DC ROBUST, bistable, for mounting in the water path, connection distributor

Hygienic flush (mains/battery):

**Execution options:** 

Hygienic flush (electronic): the hygienic flush can be carried out in electronic showers by programming via the piezo switch or the Service APP per shower.












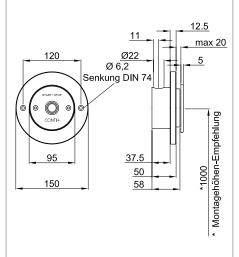

# CONBASE SLIM concealed shower/ceiling shower, round, piezo switch, DN15

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate DN20: 0,63 l/s
Water flow time setting range: 3-180 s
Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via

setting on piezo switch, other hygienic flush intervals can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation, 30 s water flow time

Electronic protection type: IP68
Dimensions (ØxD): 95x5 mm

#### Required accessories:

CONR3111 raw mounting set (DN15) CONR3121 raw mounting set (DN20) Shower head, hand shower set, central mains power supply, BLE Converter

#### Optional accessories:

**CNX** Converter

		DN 15	DN 20	A A A HYG		
Version	Power supply	Connection DN15	Connection DN20	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery		•	•	CONE2150181100	694,00
	waterproof encased	•		•	CONE2150171100	373,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•		•	CONE2150171200	373,00
		CONHEAL	) jet shower h	nead GOLF	CONO010000	175,00
ds		CONHEAD rain shower head RAIN2			CONO020000	222,00
r hea	See chapter	CONHEAD rain shower head SHORTY			CONO030000	144,00
Shower heads	shower heads	CONHEAD	jet shower h	ead VESUV	CONO060000	175,00
S		CONHEA	D jet shower l	nead CITY	CONO050000	175,00
		CONH	EAD hand sho	wer set	CONO040000	444,00

## CONCASH 2.0 concealed shower, stainless steel, round, thermostat, piezo switch, DN15



CONCASH 2.0 concealed shower, stainless steel, round, thermostat, piezo switch, DN15, paid water release, mains - final assembly kit

Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (ØxD): 260x12 mm
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator, piezo switch: colour ring red, rosette chrome plated

Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting









Mains:


# Execution options:

### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out in CONCASH showers by programming via the coin validator.

### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.



# CONCASH 2.0 concealed shower, stainless steel, round, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (mains): Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Water flow time setting range (max.): Hygienic flush setting range:

via the coin validator

Electronic protection type:

24 V/DC

0,15 l/s (flow rate regulator)

1000 min 0-240 s

IP68

#### Required accessories:

CONR0112 raw mounting set CONCASH Coin validator Shower head, hand shower set, central mains power supply


#### **Optional accessories:**

Tokens

		A A A HYG	<b>€</b> CASH		
Version	Power supply	Hygienic flush	Paid water release	Article number	EUR
	24 V/DC power supply (see chapter accessories)	•	•	CONE241321270	1.069,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
sp		CONHEAD rain shower head RAIN2		CONO020000	222,00
Shower heads	See chapter	CONHEAD rain shower head SHORTY		CONO030000	144,00
lowe	shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

# CONCASH 2.0 concealed shower, stainless steel, angular, thermostat, piezo switch, DN15





Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (HxWxD): 290x260x12 mm
- Support frame for cover plate: implementing functional elements and thermostat incl. **EPDM** sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator, piezo switch: colour ring red, rosette chrome plated











Mains: Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting


#### **Execution options:**

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out in CONCASH showers by programming via the coin validator.

### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.



# CONCASH 2.0 concealed shower, stainless steel, angular, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (mains): 24 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Water flow time setting range (max.): Hygienic flush setting range: via the coin validator

Electronic protection type:

0,15 l/s (flow rate regulator)

1000 min 0-240 s

IP68

#### Required accessories:

CONR0112 Raw mounting set CONCASH Coin validator shower head, hand shower set, central mains power supply


#### **Optional accessories:**

Tokens

		HYG	<b>€</b> CASH		
Version	Power supply	Hygienic flush	Paid water release	Article number	EUR
	24 V/DC power supply (see chapter accessories)	•	•	CONE241521270	1.211,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
sp		CONHEAD rain shower head RAIN2		CONO020000	222,00
Shower heads	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	144,00
lowe	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

## CONCASH FIT 2.0 concealed shower, stainless steel, angular, thermostat, piezo switch, DN15





Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (HxWxD): 225x170x10 mm
- Support frame for cover plate: implementing functional elements and thermostat incl. **EPDM** sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator, piezo switch: colour ring red, rosette chrome plated











Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting

#### **Execution options:**


Mains:

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out in CONCASH showers by programming via the coin validator.

#### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.



# CONCASH FIT 2.0 concealed shower, stainless steel, angular, thermostat, piezo switch, DN15

0,15 l/s (flow rate regulator)

1000 min

0-240 s

IP68

#### Technical data:

Operating voltage (mains): 24 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Water flow time setting range (max.): Hygienic flush setting range:

via the coin validator

Electronic protection type:

Required accessories:

CONR2112 Raw mounting set CONCASH Coin validator shower head, hand shower set, central mains power supply


#### **Optional accessories:**

Tokens

		HYG	€ CASH		
Version	Power supply	Hygienic flush	Paid water release	Article number	EUR
	24 V/DC power supply (see chapter accessories)	•	•	CONE241621270	939,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
sp		CONHEAD rain shower head RAIN2		CONO020000	222,00
Shower heads	See chapter	CONHEAD rain shower head SHORTY		CONO030000	144,00
lowe	shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

## CONCASH FIT 2.0 concealed shower, stainless steel, oval, thermostat, piezo switch, DN15





Final assembly kit for electronic shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, dimensions (HxWxD): 280x180x10 mm
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- · Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation of the shower function via piezo switch after release by coin validator, piezo switch: colour ring red, rosette chrome plated









Mains:

Power supply over 24 V/DC power supply for surface-mounted version in installation box or for DIN top-hat rail mounting


### **Execution options:**

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush is carried out in CONCASH showers by programming via the coin validator.

### Paid water release:

The water flow time and payment parameters can be accessed via the coin validator.



# CONCASH FIT 2.0 concealed shower, stainless steel, oval, thermostat, piezo switch, DN15

#### Technical data:

Operating voltage (mains): Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Flow rate DN15:

Water flow time setting range (max.): Hygienic flush setting range:

via the coin validator

Electronic protection type:

24 V/DC

0,15 l/s (flow rate regulator)

1000 min 0-240 s

IP68

#### Required accessories:

CONR2112 Raw mounting set CONCASH Coin validator shower head, hand shower set, central mains power supply

### **Optional accessories:**

Tokens

		HYG	<b>€</b> CASH		
Version	Power supply	Hygienic flush	Paid water release	Article number	EUR
	24 V/DC power supply (see chapter accessories)	•	•	CONE241721270	963,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
sp		CONHEAD rain shower head RAIN2		CONO020000	222,00
Shower heads	See chapter	CONHEAD rain shower head SHORTY		CONO030000	144,00
lowe	shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00
S		CONHEAD jet sh	nower head CITY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00



# CONBASE exposed shower, stainless steel, piezo switch, DN15



### CONBASE exposed shower, stainless steel, piezo switch, DN15

Electronic shower, device designed as concealed shower in nominal diameter DN15. Without mixing device for connection to cold or premixed water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Water path for exposed mounting
- Cover made from stainless steel 1.4301
- All visible surfaces brushed stainless steel
- Water path with solenoid valve 6 V/DC ROBUST, bistable, DN15
- Electronic operation of the shower function via piezo switch with start/stop function, piezo switch: colour ring red
- The water flow time of the shower function is easily adjustable.
- Interval hygiene flush to prevent stagnation

6V Lithium waterproof encased, lifetime up to 4 years Battery:

Mains: Power supply over 12 V/DC power supply for surface-mounted version

in installation box or for DIN top-hat rail mounting

Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC 1,5-5,0 bar Operating pressure: Water temp. standard operation (max.): 70 °C Flow rate DN15: 0,15 l/s Water flow time setting range: 3 -180 s

Water flow time factory setting: 30 s

12, 24 or 72 h, can be deactivated via setting on Hygienic flush setting range: piezo switch, other hygienic flush intervals can be set

via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Connection: IG 3/8 Electronic protection type: IP68 Dimensions (ØxD): 80x27 mm


Required accessories:

Shower head



		HIG		
Version	Power supply	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	CONE3110173100	448,00
	12 V/DC power supply (see chapter accessories)	•	CONE3110173200	463,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
r hea	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
S		CONHEAD jet shower head CITY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

# tipolino exposed shower faucet D35, chromed, thermostat, piezo switch, battery



- Start/stop button (piezo switch)
- Temperature adjustable with reliable thermostat cartridge with anti scald and auto-thermic
- 24, 48 or 72 hour hygienic flush activatable with start/stop button
- Including s-connectors 3/4" and rosettes (lockable s-connector optional)
- Service APP compatible: readout of the stored operating data and function settings in each case when connected to BLE Converte

Battery: 6 V Lithium 2CR5 (standard: life time up to 4 years)














### Hygienic flush (battery):

Hygiene flush can be carried out in electronic showers by programming via the piezo pushbutton per shower. 12, 24 or 72 h, deactivatable; factory setting: hygienic flush deactivated, interval and water flow time adjustable after activation.

#### Technical data:

Operating pressure: 0,3-10,0 bar ca. 12 l/m Flow rate: Water temperature (max.): 80°C

Filter: 0,3 mm mesh size

45 s pre-set (adjustable with function key 2s-2 min) Follow-up time:

Hygienic flush time: According to water flow time

Engineering standards: DIN EN 200: CE

Optional accessories: 550.070.11 Temperature handle 38 °C with override button

CONO100405 Hygiene flush pipe

Note: Service APP only available in conjunction with BLE Converter -

no permanent evaluation option.

For connection via Service APP, the BLE Converter must be

ordered separately.

$\Gamma$	A	$\overline{}$
и	) 🛡	٠
F	ΙY	Ğ

Version	Power supply	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	110.405.11	794,00
Shower heads	See chapter shower heads	CONHEAD hand shower set	CONO040000	444,00

## tipolino shower faucet D35, chromed, thermostat, piezo switch, battery



tipolino exposed shower faucet D35, chromed, thermostat, piezo switch, battery, outlet bend upwards

Electronically controlled shower faucet for exposed installation with piezo switch:

- Sturdy version; faucet body made of brass, chromed
- Microprocessor; reliable solenoid valve 6 V/DC ROBUST, bistable (minimal level of water pressure surge)
- Start/stop button (piezo switch)
- Temperature adjustable with reliable thermostat cartridge with anti scald and auto-thermic
- 24, 48 or 72 hour hygienic flush activatable with start/stop button
- Including s-connectors 3/4" and rosettes (lockable s-connector optional)
- Incl. outlet bend for trimming to size and fittings
- Service APP compatible: readout of the stored operating data and function settings in each case when connected to BLE Converte

6 V Lithium 2CR5 (standard: life time up to 4 years) Battery:

# Hygienic flush (battery):

Hygiene flush can be carried out in electronic showers by programming via the piezo pushbutton per shower. 12, 24 or 72 h, deactivatable; factory setting: hygienic flush deactivated, interval and water flow time adjustable after activation.

Technical data:

0,3-10,0 bar Operating pressure: Flow rate: ca. 12 l/m Water temperature (max.):

Filter: 0,3 mm mesh size Follow-up time:

45 s pre-set (adjustable with function key 2s-2 min) Hygienic flush time: According to water flow time

DIN EN 200; CE

Engineering standards:


Optional accessories: 550.070.11 Temperature handle 38° with override button

Note: Service APP only available in conjunction with BLE Converter -

no permanent evaluation option.

For connection via Service APP, the BLE Converter must be


ordered separately.





Version	Power supply	Hygienic flush	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•	110.406.11	883,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
r heads	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
SP		CONHEAD jet shower head CITY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

# CONFREE freestanding shower, stainless steel, piezo switch, DN15

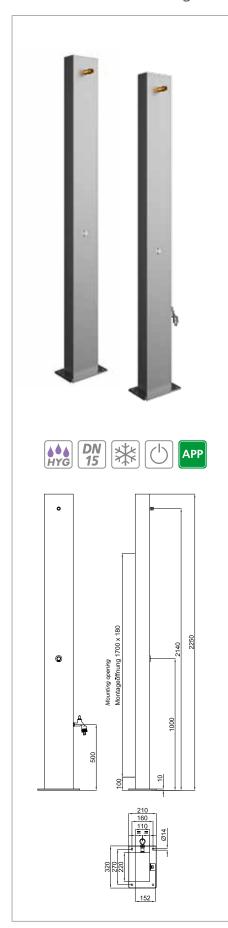

# CONFREE freestanding shower, stainless steel, piezo switch, DN15, straight design

Electronic shower unit, freestanding casing made of stainless steel, activation by easy to use piezo switch, demand-dependent and adjustable hygienic flush, for connection to cold or premixed water, freestanding installation.

#### Consisting of:

- Piezo switch, blue coloured ring, rosette high-gloss chromed
- Battery, lithium 6 V, waterproof sealed with connection cable and connector plug
- Solenoid valve 6 V/DC ROBUST, bistable, in cartridge design, with connecting cable and connector plug
- Plug-in connection for shower head with integrated flow rate regulator 0.15 l/s, chromed
- Freestanding casing: made of stainless steel, V4A, 1.4404, brushed finish, with a large, waterproof inspection cover for easy installation and maintenance, with a stable base flange with 4 mounting holes
- Connection: fitting (clamp connector) for PE pipe Ø 25 mm

#### **Execution options:**

#### Base functions:

- Water flow time: 30 s factory setting (3-180 s) with start/stop function
- Hygienic flush factory setting: 30 s water flush after 12 h of last water flow activation (12, 24, 72 h adjustable or may be disabled)

# CONFREE freestanding shower, stainless steel, piezo switch, DN15

Technical data:

Connection: Threaded fitting (clamp connector)

for PE-pipe Ø25 mm

Operating voltage: 6 V/DC Operating pressure: 1,0-5,0 bar

Flow rate: 0,15 l/s (flow rate limiter)
Electronic protection type: IP68 (electronic components)
Dimensions (WxHxD): 220x2250x110 mm
Base flange (WxHxD): 210x320x10 mm

Required accessories:

CONO580000 Power suppy unit CONFREE (for version with frost protection circuit)

Optional accessories:

CONO650000 Base plate CONFREE CONO651000 Protective cover CONFREE

		***		
Description	With faucet	With frost protection circuit	Article number	EUR
			CONE5418123100	3.162,00
CONFREE freestanding shower, stainless steel, with thermostat, battery, DN15	•		CONE5518123100	3.913,00
		•	CONE5618123100	4.458,00
	CONHEAD jet shower head GOLF		CONO010010	175,00
	CONHEAD rain shower head RAIN2		CONO020010	222,00
See chapter shower heads	CONHEAD rain shower head SHORTY		CONO030010	144,00
			CONO060010	175,00
			CONO050010	175,00
	CONFREE freestanding shower, stainless steel, with thermostat, battery, DN15	CONFREE freestanding shower, stainless steel, with thermostat, battery, DN15  CONHEAD jet GC  CONHEAD rain RA  See chapter shower heads  CONHEAD rain SHO  CONHEAD jet VES	Description  With faucet  CONFREE freestanding shower, stainless steel, with thermostat, battery, DN15  CONHEAD jet shower head GOLF  CONHEAD rain shower head RAIN2  See chapter  CONHEAD rain shower head	Description  With faucet protection circuit  CONE5418123100  CONFREE freestanding shower, stainless steel, with thermostat, battery, DN15  CONE5518123100  CONE5518123100  CONE5618123100  CONHEAD jet shower head GOLF  CONHEAD rain shower head RAINZ  CONO020010  CONHEAD rain shower head SHORTY  CONO030010  CONHEAD jet shower head CONO030010  CONHEAD jet shower head VESUV  CONHEAD jet shower head CONO060010

## CONFREE freestanding shower, stainless steel, thermostat, piezo switch, DN15












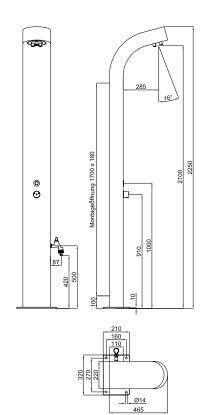

### CONFREE freestanding shower, stainless steel, thermostat, piezo switch, DN15, curved design

Electronic shower unit, mains power-independet, with self-closing function and thermostatic mixer with anti-scald protection, jet shower head CONHEAD-MAXI, freestanding casing made of stainless steel, activation by easy to use piezo switch, demand-dependent and adjustable hygienic flush, for connection to cold and hot water, freestanding installation.

#### Consisting of:

- Piezo switch, blue coloured ring, rosette high-gloss chromed
- Battery, lithium 6 V, waterproof sealed with connection cable and connector plug
- Solenoid valve 6 V/DC ROBUST, bistable, in cartridge design, with connecting cable and connector plug
- Thermostat battery, solid version, casing and actuating element made of brass, with safety lock with fixed stop, with integrated check valve (DVGW certified) and stainless steel sieves, temperature setting range 10-50 °C, with the option of manual thermal disinfection,
- CONHEAD-MAXI jet shower head: fixed, heavy solid brass version, with three single jet nozzles, low maintenance, low aerosol, chrome plated
- Freestanding casing: made of stainless steel, V4A, 1.4404, with a large, waterproof inspection cover for easy installation and maintenance, with a stable base flange, with 4
- Connection: fitting (clamp connector) for PE pipe Ø 25 mm

### **Execution options:**

#### **Base functions:**

- Water flow time: 30 s factory setting (3-180 s) with start/stop function
- Hygienic flush factory setting: 30 s water flush after 12 h of last water flow activation (12, 24, 72 h adjustable or may be disabled)

# CONFREE freestanding shower, stainless steel, thermostat, piezo switch, DN15

Technical data:

Connection: Threaded fitting (clamp connector)

for PE-pipe Ø25 mm

Operating voltage: 6 V/DC Operating pressure: 1,0-5,0 bar

Flow rate: 0,15 l/s (flow rate limiter)

Projection: 120/2100 mm

Flow angle: 16°

Electronic protection type: IP68 (electronic components)
Dimensions (WxHxD): 220x2250x465 mm

Base flange (WXHXD): 220X2250X465 m 210X320X10 mm Required accessories:


CONO580000 Power suppy unit CONFREE (for version with frost protection circuit)

Optional accessories:


CONO650000 Base plate CONFREE CONO651000 Protective cover CONFREE

			**************************************		
Version	Description	With faucet	With frost protection circuit	Article number	EUR
	CONFREE freestanding shower, stainless steel brushed, with thermostat, battery, DN15			CONE5118221100	5.357,00
		•		CONE5218221100	6.469,00
			•	CONE5318221100	6.469,00
	CONFREE freestanding shower, stainless steel polished, with thermostat, battery, DN15			on request	on request


# Base plate CONFREE, straight and curved version

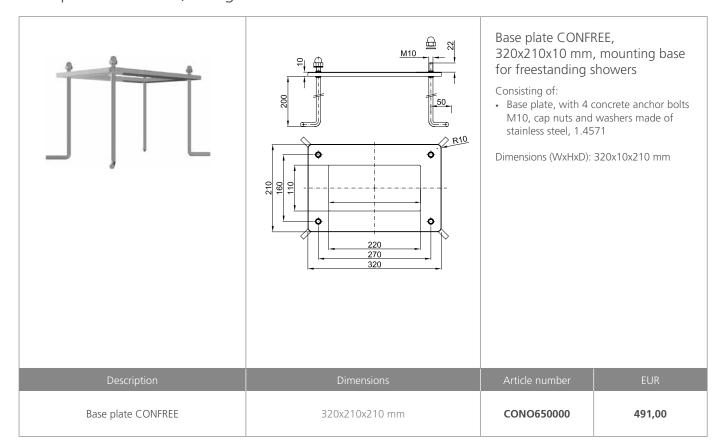


# Protective cover CONFREE, straight and curved version

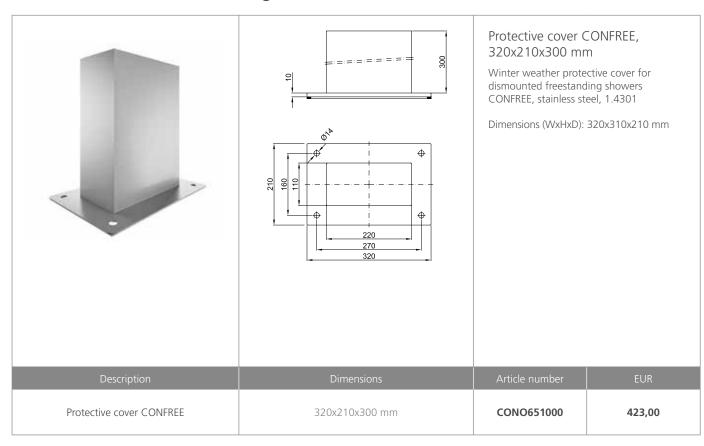

# Power supply unit CONFREE 24 V/DC/10A

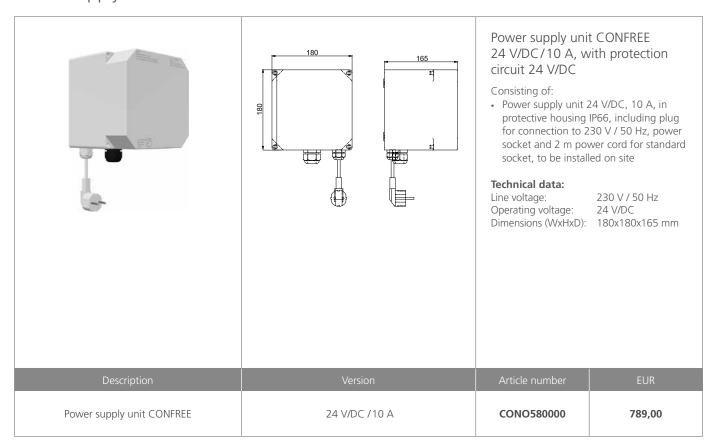



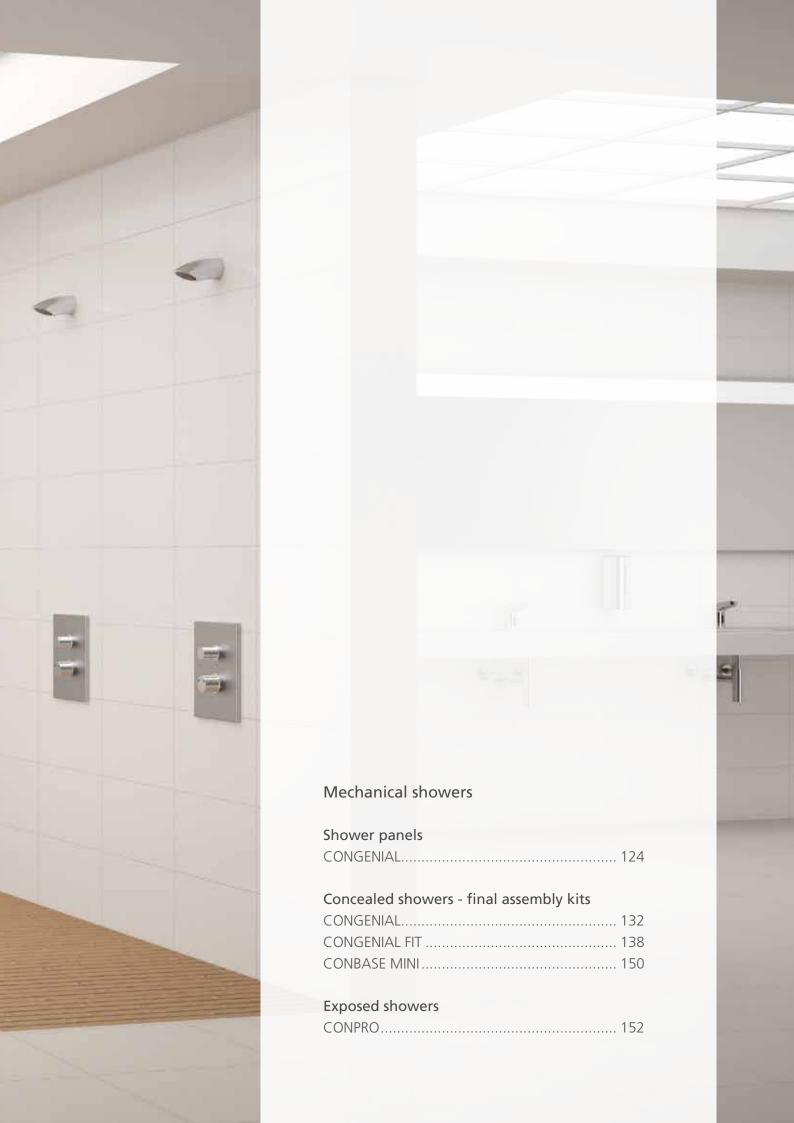


# CONGENIAL shower panel, stainless steel, thermostat, water hydraulics, DN15









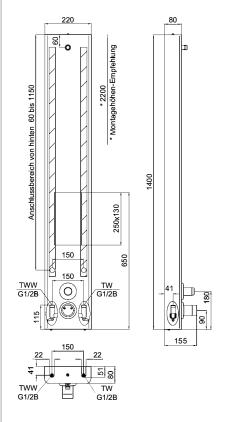

### CONGENIAL shower panel, stainless steel, thermostat, water hydraulics, DN15

Mechanical shower faucet designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover and mounting frame made of stainless steel 1.4301
- All visible surfaces made of brushed stainless steel.
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Mechanic operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

# CONGENIAL shower panel, stainless steel, thermostat, water hydraulics, DN15

#### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 220x1400x80 mm

#### Required accessories:

Shower head, hand shower set

#### Optional accessories:


Connection kit Cover extension

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power

supply unit and key switch) see chapter accessories

		<b>TD</b> <sub>M</sub>					
Version		Thermal disinfection (manual)	Adjustable water flow time	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
			•	•	CONM0212214000	CONM0112214000	1.481,00
(3)		•	•	•	CONM0212214002	CONM0112214002	1.509,00
H2O			•		CONM0211214000	CONM0111214000	1.513,00
		•	•		CONM0211214002	CONM0111214002	1.192,00
		CONHEAD je	et shower head GOLF	:		CONO010010	175,00
SS		CONHEAD rain shower head RAIN2				CONO020010	222,00
. head	See chapter	CONHEAD rain	n shower head SHOR	TY		CONO030010	144,00
Shower heads	shower heads	CONHEAD jet shower head VESUV				CONO060010	175,00
Sh		CONHEAD j	et shower head CITY			CONO050010	175,00
		CONHEA	D hand shower set		CONO040010		444,00

# CONGENIAL shower panel, AVW, thermostat, water hydraulics, DN15

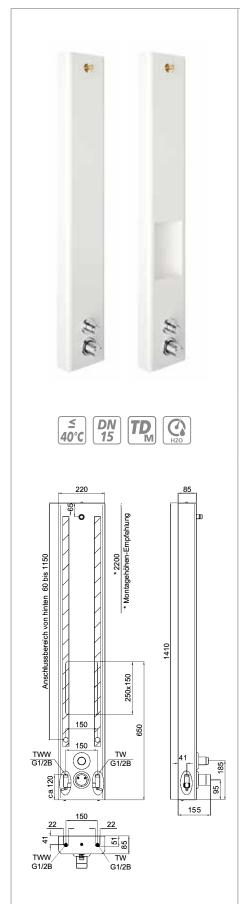

### CONGENIAL shower panel, AVW, thermostat, water hydraulics, DN15

Mechanical shower faucet designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- AVW shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover 2K-acrylic composite material, break-proof and impact-resistent, very easy to clean
- Mounting frame made of stainless steel 1.4301
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Mechanic operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

#### Cover versions:

With or without integrated soap dish

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

# CONGENIAL shower panel, AVW, thermostat, water hydraulics, DN15

#### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 220x1410x85 mm

#### Required accessories:

Shower head, hand shower set

### Optional accessories:

Connection kit Cover extension

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch)

see chapter accessories

		<b>TD</b> <sub>M</sub>					
Version		Thermal disinfection (manual)	Adjustable water flow time	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
			•	•	CONM0232214000	CONM0132214000	1.097,00
(3)		•	•	•	CONM0232214002	CONM0132214002	1.192,00
Н2О			•		CONM0231214000	CONM0131214000	1.118,00
		•	•		CONM0231214002	CONM0131214002	1.112,00
	CONHEAD jet shower head GOLF				CONO010010	175,00	
So		CONHEAD rain shower head RAIN2				CONO020010	222,00
Shower heads	See chapter	CONHEAD rair	n shower head SHOR	TY		CONO030010	144,00
lower	shower heads	CONHEAD jet shower head VESUV			CONO060010	175,00	
S		CONHEAD j	et shower head CITY			CONO050010	175,00
		CONHEAL	D hand shower set		CONO040010		444,00

## CONGENIAL shower panel, stainless steel, thermostat, on/off-handle, DN15



# CONGENIAL shower panel, stainless steel, thermostat, on/off-handle, DN15

Mechanical shower faucet, designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Stainless steel shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover and mounting frame made of stainless steel 1.4301
- All visible surfaces made of brushed stainless steel
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid, chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

#### **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

150

# CONGENIAL shower panel, stainless steel, thermostat, on/off-handle, DN15

#### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.):  $70 \, ^{\circ}\text{C}$ 

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 220x1400x80 mm

#### Required accessories:

Shower head, hand shower set

### Optional accessories:


Connection kit Cover extension

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch)

see chapter accessories

		<b>TD</b> <sub>M</sub>					
Version		Thermal disinfection (manual)	Adjustable water flow time	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
			•	•	CONM0212216000	CONM0112216000	1.519,00
		•	•	•	CONM0212216002	CONM0112216002	1.491,00
			•		CONM0211216000	CONM0111216000	1.125,00
		•	•		CONM0211216002	CONM0111216002	1.220,00
		CONHEAD jet shower head GOLF				CONO010010	175,00
Sp		CONHEAD rain shower head RAIN2				CONO020010	222,00
. head	See chapter	CONHEAD rain	n shower head SHOR	TY		CONO030010	144,00
Shower heads	shower heads	CONHEAD jet shower head VESUV				CONO060010	175,00
Sh		CONHEAD j	et shower head CITY			CONO050010	175,00
		CONHEA	D hand shower set		CONO040010		444,00

# CONGENIAL shower panel, AVW, thermostat, on/off-handle, DN15

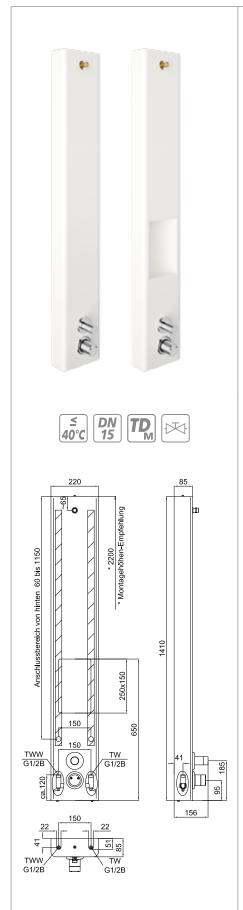

### CONGENIAL shower panel, AVW, thermostat, on/off-handle, DN15

Mechanical shower faucet designed as shower panel in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- AVW shower panel. Model with mounting frame for fixing the water path, including mounting material
- Cover 2K-acrylic composite material, break-proof and impact-resistent, very easy to clean
- Mounting frame made of stainless steel 1.4301
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid, chromed brass, with safety stop
- · Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

#### Cover versions:

With or without seamlessly integrated soap dish

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

# CONGENIAL shower panel, AVW, thermostat, on/off-handle, DN15

#### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 220x1400x80 mm

#### Required accessories:

Shower head, hand shower set

#### Optional accessories:

Connection kit Cover extension

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch)

see chapter accessories

		<b>TD</b> <sub>M</sub>					
Version		Thermal disinfection (manual)	Adjustable water flow time	Integrated shelf	Article number for version hand shower	Article number for version shower head	EUR
			•	•	CONM0232216000	CONM0132216000	1.125,00
		•	•	•	CONM0232216002	CONM0132216002	1.220,00
			•		CONM0231216000	CONM0131216000	1.549,00
		•	•		CONM0231216002	CONM0131216002	1.446,00
		CONHEAD jet shower head GOLF			CONO010010	175,00	
SS		CONHEAD rain shower head RAIN2			CONO020010	222,00	
. head	See chapter	CONHEAD rair	n shower head SHOR	TY		CONO030010	144,00
Shower heads	shower heads	CONHEAD jet shower head VESUV			CONO060010	175,00	
Sh		CONHEAD j	et shower head CITY			CONO050010	175,00
		CONHEAL	D hand shower set		CONO040010		444,00

## CONGENIAL concealed shower, stainless steel, round, thermostat, water hydraulics, DN15



0

# CONGENIAL concealed shower, stainless steel, round, thermostat, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-120 s
Water flow time factory setting: 30 s
Dimensions (ØxD): 260x12 mm

#### Required accessories:

CONR0112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

#### Optional accessories:

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories





Verson		Thermal disinfection (manual)	Adjustable water flow time	Article number	EUR
(a)			•	CONM2113214000	618,00
H2O		•	•	CONM2113214020	716,00
	See chapter shower heads	CONHEAD jet shower head GOLF		CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2		CONO020000	248,00
hea		CONHEAD rain shower head SHORTY		CONO030000	201,00
Shower heads		CONHEAD jet shower head VESUV		CONO060000	175,00
SP		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD hand shower set		CONO040000	444,00


## CONGENIAL concealed shower, stainless steel, angular, thermostat, water hydraulics, DN15











# CONGENIAL concealed shower, stainless steel, angular, thermostat, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid chromed brass, with safety stop
- · Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-120 s
Water flow time factory setting: 30 s
Dimensions (ØxD): 260x12 mm

#### Required accessories:

CONR0112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

#### **Optional accessories:**

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories





Verson		Thermal disinfection (manual)	Adjustable water flow time	Article number	EUR
			•	CONM2115214000	618,00
H20		•	•	CONM2115214020	716,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
So		CONHEAD rain shower head RAIN2	CONO020000	248,00	
Shower heads	See chapter	CONHEAD rain sho	CONHEAD rain shower head SHORTY	CONO030000	201,00
ower	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
Sh		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD hand shower set		CONO040000	444,00

# CONGENIAL concealed shower, stainless steel, round, thermostat, oil hydraulics, DN15



CONGENIAL concealed shower, stainless steel, round, thermostat, oil hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via oil hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

1,5-5,0 bar Operating pressure: Water temp. standard operation (max.): 70 °C

Short-term for therm. disinfection 80 °C Water temp. thermal disinfection: Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-120 s

Water flow time factory setting: 30 s Dimensions (ØxD): 260x12 mm


#### Required accessories:

CONRO112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

#### Optional accessories:

TD

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories



Befestigungsmaterial max Ø8mm

		M			
Verson		Thermal disinfection (manual)	Adjustable water flow time	Article number	EUR
			•	CONM2113215000	732,00
ÖL		•	•	CONM2113215020	827,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
Sp		CONHEAD rain sh	nower head RAIN2		
. head	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
Sh		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD hand shower set		CONO040000	444.00

## CONGENIAL concealed shower, stainless steel, angular, thermostat, oil hydraulics, DN15



# oil hydraulics, DN15 - final assembly kit

CONGENIAL concealed shower, stainless steel, angular, thermostat,

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via oil hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

#### Technical data:

1,5-5,0 bar Operating pressure: 70 °C Water temp. standard operation (max.):

Short-term for therm. disinfection 80 °C Water temp. thermal disinfection:

Flow rate DN15: 0,15 l/s (flow rate regulator)

Water flow time setting range: 3-120 s 30 s Water flow time factory setting: 260x12 mm Dimensions (ØxD):


#### Required accessories:

CONRO112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

#### **Optional accessories:**

[TD]

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories



		M			
Verson		Thermal disinfection (manual)	Adjustable water flow time	Article number	EUR
			•	CONM2115215000	732,00
ŎL.		•	•	CONM2115215020	827,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
Sp		CONHEAD rain sh	nower head RAIN2	CONO010000 175,00 CONO020000 248,00	
. head	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
Sh		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD hand shower set		CONO040000	444.00

## CONGENIAL concealed shower, stainless steel, round, thermostat, on/off-handle, DN15














### CONGENIAL concealed shower, stainless steel, round, thermostat, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

#### **Execution options:**

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

#### Technical data:

Operating pressure: 1,5-5,0 bar 70 °C Water temp. standard operation (max.):

Short-term for therm. disinfection 80 °C Water temp. thermal disinfection:

Water flow time setting range: 3-120 s Water flow time factory setting: 30 s Dimensions (ØxD): 260x12 mm

### Required accessories:

CONRO112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

### Optional accessories:

**TD**<sub>M</sub>

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories

Version		Thermal disinfection (manual)	Article number	EUR
H			CONM2113216000	812,00
		•	CONM2113216020	907,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
ds		CONHEAD rain shower head RAIN2	CONO020000	248,00
ower heads	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
) wer	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00

CONHEAD jet shower head CTY

CONHEAD hand shower set

CONO050000

CONO040000

175,00

444,00

# CONGENIAL concealed shower, stainless steel, angular, thermostat, on/off-handle, DN15














# CONGENIAL concealed shower, stainless steel, angular, thermostat, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust quadruple lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: ABS with EPDM lip seal
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- · Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

#### **Execution options:**

#### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

#### **Technical data:**

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.):  $70~^{\circ}\text{C}$ 

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-120 s
Water flow time factory setting: 30 s
Dimensions (ØxD): 260x12 mm

#### Required accessories:

CONR0112 raw-assembling set, alternatively CONR1112 shower head, hand shower set

### Optional accessories:

TD

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories

		M		
Version		Thermal disinfection (manual)	Article number	EUR
			CONM2115216000	812,00
		•	CONM2115216020	907,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
. head	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
She		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, stainless steel, round, water hydraulics, DN15














### CONGENIAL FIT concealed shower, stainless steel, round, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets Some of the functional parts can be dismantled during maintenance work without
- removing the valve body Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

#### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: Water flow time setting range: 3-30 s Water flow time factory setting: 30 s Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

#### **Optional accessories:**

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories

		TD <sub>M</sub>			
Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
			•	CONM2114214000	541,00
H2O		•	•	CONM2114214020	636,00
		CONHEAD jet shower head GOLF		CONO010000	175,00
sp		CONHEAD rain sh	nower head RAIN2	er head RAIN2 CONO020000	
r hea	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
Sh		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD hand shower set		CONO040000	444,00


## CONGENIAL FIT concealed shower, chromed, round, water hydraulics, DN15











### CONGENIAL FIT concealed shower, chromed, round, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar 70 °C Water temp. standard operation (max.):

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: Water flow time setting range: 3-30 s Water flow time factory setting: Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### **Optional accessories:**

TD

		M			
Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
			•	CONM2154214000	574,00
H2O		•	•	CONM2154214020	670,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
sp		CONHEAD rain shower head RAIN2		CONO020000	248,00
Shower heads	See chapter shower heads	CONHEAD rain shower head SHORTY		CONO030000	201,00
		CONHEAD jet shower head VESUV		CONO060000	175,00
S		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, stainless steel, round, on/off-handle, DN15














### CONGENIAL FIT concealed shower, stainless steel, round, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar 70 °C

Water temp. standard operation (max.):

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

7	1	) M

Version		Thermal disinfection (manual)	Article number	EUR
			CONM2114216000	735,00
		•	CONM2114216020	808,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
hea	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, chromed, round, on/off-handle, DN15














### CONGENIAL FIT concealed shower, chromed, round, on/off-handle, DN15 final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with round cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

1,5-5,0 bar 70 °C Operating pressure:

Water temp. standard operation (max.): Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: Water flow time factory setting: 3-30 s 30 s Dimensions (ØxD): 260x12 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

TD

		I D M		
Version		Thermal disinfection (manual)	Article number	EUR
			CONM2154216000	767,00
		•	CONM2154216020	838,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
ds	SF	CONHEAD rain shower head RAIN2	CONO020000	248,00
See chapter shower heads	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, stainless steel, angular, water hydraulics, DN15














### CONGENIAL FIT concealed shower, stainless steel, angular, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets Some of the functional parts can be dismantled during maintenance work without
- removing the valve body Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70°C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 170x225x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### **Optional accessories:**

		TD <sub>M</sub>			
Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
(3)			•	CONM2116214000	498,00
H2O		•	•	CONM2116214020	552,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2		CONO020000	248,00
. head	See chapter	CONHEAD rain shower head SHORTY		CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, chromed, angular, water hydraulics, DN15














### CONGENIAL FIT concealed shower, chromed, angular, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar 70 °C Water temp. standard operation (max.):

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: Water flow time setting range: 3-30 s Water flow time factory setting:

Dimensions (WxHxD): 170x225x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

TD

CONO321000 Thermal disinfection (electronic) (precondition: with corresponding wiring / power supply unit and key switch) see chapter accessories

CONO040000

		IVI			
Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
			•	CONM2156214000	502,00
H2O		•	•	CONM2156214020	515,00
		CONHEAD jet sh	lower head GOLF	CONO010000	175,00
Sp		CONHEAD rain sh	nower head RAIN2	CONO020000	248,00
r hea	See chapter	CONHEAD rain sho	ower head SHORTY	CONO030000	201,00
See chapter shower heads	CONHEAD jet sho	ower head VESUV	CONO060000	175,00	
S		CONHEAD jet sl	nower head CTY	CONO050000	175,00

CONHEAD hand shower set

444.00


## CONGENIAL FIT concealed shower, stainless steel, angular, on/off-handle, DN15











### CONGENIAL FIT concealed shower, stainless steel, angular, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar

Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting:

Dimensions (WxHxD): 170x225x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

7	1	M

Version		Thermal disinfection (manual)	Article number	EUR
			CONM2116216000	582,00
		•	CONM2116216020	652,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
heads	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, chromed, angular, on/off-handle, DN15














### CONGENIAL FIT concealed shower, chromed, angular, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with angular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel. Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

1,5-5,0 bar 70 °C Operating pressure: Water temp. standard operation (max.): Water temp. thermal disinfection:

Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 170x225x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

TD <sub>M</sub>

Version		Thermal disinfection (manual)	Article number	EUR
NTA			CONM2156216000	614,00
		•	CONM2156216020	686,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
heads	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, stainless steel, oval, water hydraulics, DN15














# CONGENIAL FIT concealed shower, stainless steel, oval, water hydraulics, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,15 l/s
Water flow time setting range: 3-30 s
Water flow time factory setting: 30 s

Dimensions (WxHxD): 180x280x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### **Optional accessories:**





Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
(a)			•	CONM2117214000	513,00
H2O		•	•	CONM2117214020	506,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2		CONO020000	248,00
. head	See chapter	CONHEAD rain shower head SHORTY		CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
Sh		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, chromed, oval, water hydraulics, DN15














### CONGENIAL FIT concealed shower, chromed, oval, water hydraulics, DN15 final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for con-
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the

### Technical data:

Operating pressure: 1,5-5,0 bar 70 °C Water temp. standard operation (max.):

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C Flow rate DN15: 0,15 l/s

Water flow time setting range: 3-30 s Water flow time factory setting: Dimensions (WxHxD):

180x280x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### **Optional accessories:**

[TD]

		M			
Version		Therm. Desinfektion (manuell)	Adjustable water flow time	Article number	EUR
			•	CONM2157214000	517,00
H2O		•	•	CONM2157214020	515,00
		CONHEAD jet sh	ower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2		CONO020000	248,00
Shower heads	See chapter	CONHEAD rain shower head SHORTY		CONO030000	201,00
ower	shower heads	CONHEAD jet shower head VESUV		CONO060000	175,00
S		CONHEAD jet sł	nower head CTY	CONO050000	175,00
		CONHEAD ha	nd shower set	CONO040000	444,00


## CONGENIAL FIT concealed shower, stainless steel, oval, on/off-handle, DN15











### CONGENIAL FIT concealed shower, stainless steel, oval, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel, Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

1,5-5,0 bar Operating pressure: Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 180x280x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

ſ	TD
Į	M

Version		Thermal disinfection (manual)	Article number	EUR
			CONM2117216000	582,00
		•	CONM2117216020	652,00
	See chapter shower heads	CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
Shower heads		CONHEAD rain shower head SHORTY	CONO030000	201,00
ower		CONHEAD jet shower head VESUV	CONO060000	175,00
S		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONGENIAL FIT concealed shower, chromed, oval, on/off-handle, DN15














# CONGENIAL FIT concealed shower, chromed, oval, on/off-handle, DN15 - final assembly kit

Final assembly kit for mechanical shower device, designed as concealed shower in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for condensation
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel, Support frame for cover plate
- Implementing functional elements and thermostat incl. EPDM sealing rings
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with manual TD plug installed for thermal disinfection
- Upgrade and retrofitting functions
- Water path: dezincification resistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- Choice of temperature setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- Some of the functional parts can be dismantled during maintenance work without removing the valve body
- Mechanical operation of the shower function via on/off-handle

### **Execution options:**

### Thermal disinfection (manual):

The thermal disinfection of a shower based on the adaptive multifunctional water path CONGENIAL with bypass solenoid valve can be executed with a manual TD plug installed in the bypass directly per shower.

### Technical data:

Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Water flow time setting range: 3-30 s Water flow time factory setting: 30 s

Dimensions (WxHxD): 180x280x10 mm

### Required accessories:

CONR2112 Raw-assembling set, shower head, hand shower set

### Optional accessories:

Version		Thermal disinfection (manual)	Article number	EUR
			CONM2157216000	614,00
		•	CONM2157216020	686,00
		CONHEAD jet shower head GOLF	CONO010000	175,00
Sp		CONHEAD rain shower head RAIN2	CONO020000	248,00
head	See chapter	CONHEAD rain shower head SHORTY	CONO030000	201,00
Shower heads	shower heads	CONHEAD jet shower head VESUV	CONO060000	175,00
		CONHEAD jet shower head CTY	CONO050000	175,00
		CONHEAD hand shower set	CONO040000	444,00

## CONBASE MINI concealed shower, stainless steel, round, water hydraulics



# CONBASE MINI concealed shower, stainless steel, round, water hydraulics - final assembly kit

Final assembly kit for mechanical shower, device designed as concealed shower in nominal diameter DN15 and DN20. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- · Concealed shower final assembly kit round push-on rosette
- · Hydraulic self-closing valve
- · Actuating button and push-on rosette made of brass, chromed
- Mechanical operation of the shower function via water-hydraulic self-closing button
- The water flow time of the shower function can be adjusted in mechanical hydraulic showers by means of an adjustment screw in the hydraulics of each shower



Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C


Flow rate DN15: 0,15 l/s to 0,35 l/s (3 bar)

 $\begin{array}{lll} \mbox{Calculation flow:} & 1,0 \mbox{ l/s} \\ \mbox{Water flow time setting range:} & 7-15 \mbox{ (+/-5) s} \\ \mbox{Dimension ($\mbox{Ø}$xD):} & 80x10 \mbox{ mm} \\ \end{array}$ 









### Required accessories:

CONR4111 raw-assembling set, shower head, hand shower set

		DN 15	DN 20			
Version		Nominal diameter DN15	Nominal diameter DN20	Adjustable water flow time	Article number	EUR
		•		•	CONM2150174000	299,00
H2O			•	•	CONM2150184000	339,00
		CONHEAD jet shower head GOLF		CONO010000	175,00	
Sp	See chapter shower heads	CONHEAD rain shower head RAIN2			CONO020000	248,00
Shower heads		CONHEAD rain shower head SHORTY			CONO030000	201,00
ower		CONHEAD jet shower head VESUV		CONO060000	175,00	
Sh		CONHE	AD jet shower he	ead CTY	CONO050000	175,00
		CONF	HEAD hand show	ver set	CONO040000	444,00



## CONPRO exposed shower, chromed, water hydraulics, DN15



### CONPRO exposed shower, chromed, water hydraulics, DN15

For wall mounting, for connection to cold or hot water

- Single-lever self-closing mixer, solid metal version, brass body and operating element
- Hydraulic control, cartridge technology, self-cleaning system, integrated check valve (DVGW certified), hot water supply limiter, selectable water flow time, continuously adjustable flow rate
- All water-bearing components are made of hygienic material in accordance with the requirements of drinking water ordinance [Germany]
- Chrome plated filter seals
- Wall mounting kit with shut-off S-connectors, angled fittings, chromed
- With outlet facing upwards
- · With temperature mixing

### Base functions:

Water flow time: 30 s factory settings acc. to DIN EN 816 (20, 25 s)

### Technical data:

Operating pressure: 1,5-5,0 bar

Water temperature (max.): 60 °C (short-term up to 75 °C for thermal disinfection)

Flow rate: 0,15-0,35 l/s adjustable (3 bar flow pressure)


Calculated flow rate: 0,15 l/s

Connection bore hole gauge: access 130-175 mm, G 1/2 B

Outlet on top: G 1/2 B

#### DN | 15



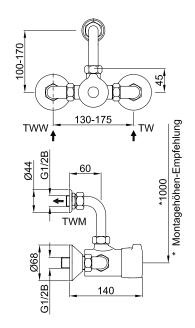

### Required accessories:

Shower head DN15

Description	Outlet	Article number	EUR
CONPRO exposed shower	With bent outlet	CONM4159414000	720,00

## CONPRO exposed shower, chromed, water hydraulics, DN15

### CONPRO exposed shower, chromed, water hydraulics, DN15

For wall mounting, for connection to cold or hot water

### Consisting of:

- Single-lever self-closing mixer, solid metal version, brass body and operating element
- Hydraulic control, cartridge technology, self-cleaning system, integrated check valve (DVGW certified), hot water supply limiter, selectable water flow time, continuously adjustable flow rate
- All water-bearing components are made of hygienic material in accordance with the requirements of drinking water ordinance [Germany]
- Chrome plated filter seals
- Wall mounting kit with shut-off S-connectors, angled fittings, chromed
- With outlet facing upwards
- · With temperature mixing



Water flow time: 30 s factory settings acc. to DIN EN 816 (20, 25 s)

Technical data:

Operating pressure: 1,5-5,0 bar


Water temperature (max.): 60 °C (short-term up to 75 °C for thermal disinfection)

Flow rate: 0,15-0,35 l/s adjustable (3 bar flow pressure)

Calculated flow rate: 0,15 l/s

Connection bore hole gauge: access 130-175 mm, G1/2B


Outlet on top: G 3/4 B



CONO010060 Shower head kit CONHEAD GOLF, wall distance 60 mm, DN15 CONO020060 Shower head kit CONHEAD RAIN 2, wall distance 60 mm, DN15  $\,$ 

Shower head DN15



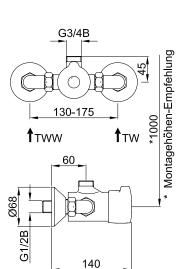

Description	Outlet	Article number	EUR
CONPRO exposed shower	Without bent outlet	CONM4150414000	636,00

## CONPRO exposed shower, chromed, water hydraulics, DN15



### CONPRO exposed shower, chromed, water hydraulics, DN15

For wall mounting, for connection to cold or premixed water, scalding protection, intrinsically safe

### Consisting of

- With integral self-closing valve, solid metal version, brass body and operating element
- Hydraulic control, cartridge technology, temperature setting range 10-50 °C, temperature selector with safety lock and fixed end stop, with integral check valves and stainless steel sieves, adjustable flow rate and set water flow time
- All water-bearing components are made of hygienic material in accordance with the requirements of drinking water ordinance [Germany]
- Wall mounting kit with shut-off S connectors, angled fittings, and outlet bend for trimming to size, chromed
- Thermostat with scalding protection, intrinsically safe
- With outlet facing upwards

### Base functions:

Water flow time: 30 s factory settings acc. to DIN EN 816

### Technical data:

Operating pressure: 1,5-5,0 bar

Water temperature (max.):  $60 \, ^{\circ}\text{C}$  (short-term up to 75  $^{\circ}\text{C}$  for thermal disinfection)

Flow rate: 0,37 l/s adjustable (3 bar flow pressure)

Calculated flow rate: 0,15 l/s


Connection bore hole gauge: access 140-160 mm Connection bore hole gauge: outlet 100-170 mm


Connection: G 1/2 B

### Required accessories:

Shower head







Description	Outlet	Article number	EUR
CONPRO exposed shower	With bent outlet	CONM4159214000	802,00

## CONPRO exposed shower, chromed, on/off-handle, DN15



### CONPRO exposed shower, chromed, on/off-handle, DN15

For wall mounting, for connection to hot and cold water

### Consisting of:

- Thermostatic mixer, solid metal version, red brass body, temperature setting range 10-50 °C, integral check valve and stainless steel sieves
- All water-bearing components are made of hygienic material in accordance with the requirements of drinking water ordinance [Germany]
- Safety lock with fixed end stop (with override for manual thermal disinfection) and scalding
  protection in case of cold water failure, manual thermal disinfection possible, integral stop
  valve with ceramic head, exchangeable mixed water outlet at the bottom/top, chromed
- One set S connections with rosettes, chromed
- Without bent outlet

### Technical data:


Flow rate: 0,25 l/s (3 bar flow pressure)


Operating pressure (max.): 6,0 bar

Water temperature (max.): 70 °C (Shortly up to 80 °C for thermal disinfection)

Connection: G 1/2 B

# **≤ DN 15**







### Required accessories:

Hand shower set

Description	Outlet	Article number	EUR
CONPRO exposed shower	Without bent outlet	CONM4150216000	259,00

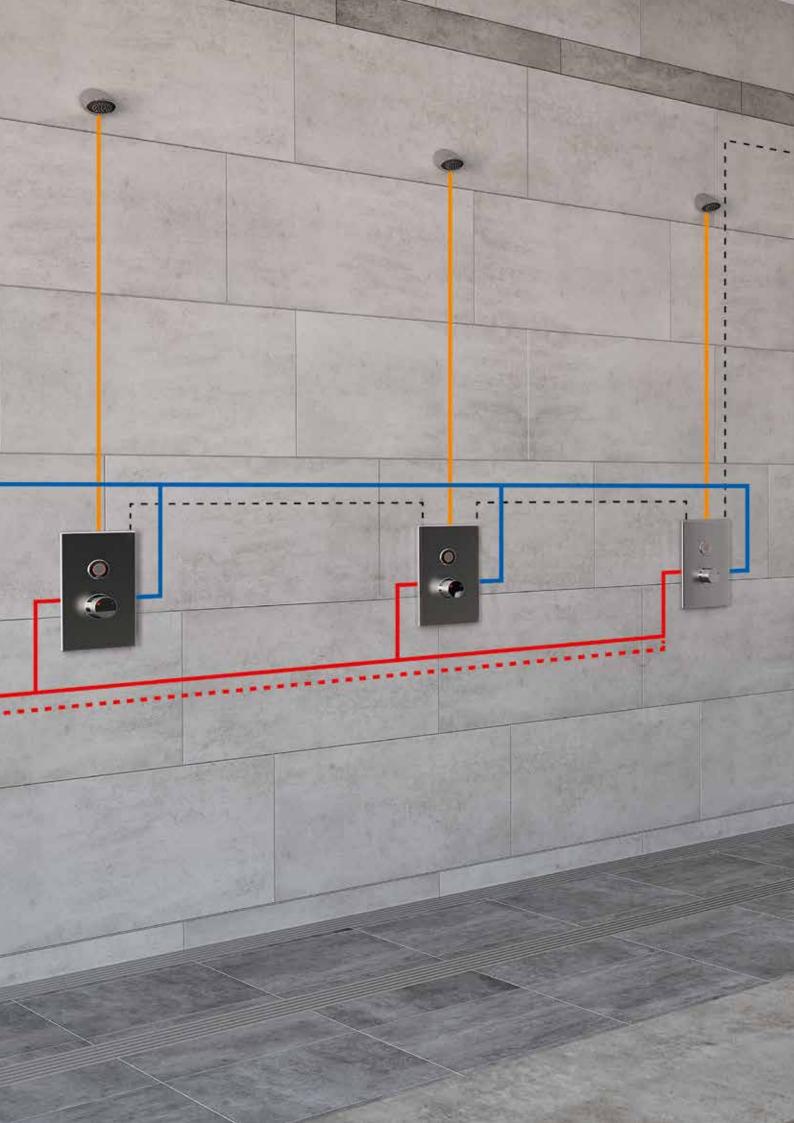

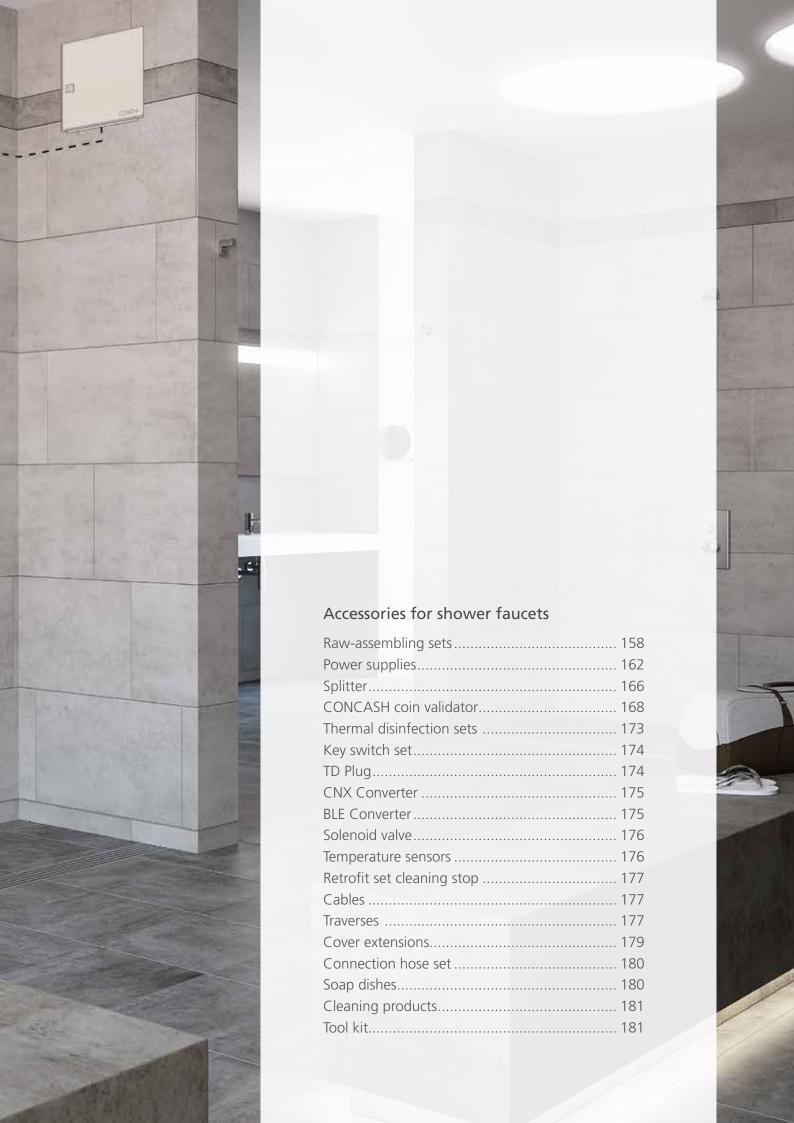

## CONBOX raw-assembling set for concealed shower, DN15





### CONBOX raw-assembling set for concealed shower, thermostat, DN15

Raw-assembling set for mechanical and electronic shower equipment based on the adaptive multifunctional water path CONGENIAL with thermostat, designed as flush-mounted shower in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

### Consisting of:

- Concealed shower box CONBOX
- Recessed enclosure: ABS, dimensions (WxHxD minimum): 232x272x96 mm, self-supporting
- Fastener brackets for mounting material with max. diameter 8 mm
- Wall outlet diameter 230 mm can be cut to length of tile front edge, condensate drain slope
- Sealed and sound-insulated brass entrances and exits, inlet with shut-off valves R 1/2
- Detachable connecting coupling for exchange the flushing piece on the water path
- Mounting depth with final assembly set: 96-110 mm
- Flushing piece: ABS, waterless and hygienically, tested for leakage
- Protective plug: EPS, dimension (ØxD) 226x40 mm
- Gasket ring: PE, dimensions (WxH) 450x450 mm, with expansion zone
- · Connection to cold and hot water

Description	Connection	Nominal width	Article number	EUR
CONBOX raw-assembling set for concealed shower, thermostat	R 1/2	DN15	CONR0112	269,00

## CONBOX FLANGE raw-assembling sets for concealed shower, DN15



# CONBOX FLANGE raw-assembling set for concealed shower, thermostat, DN15 with bonding flange

Raw-assembling set for mechanical and electronic shower equipment based on the adaptive multifunctional water path CONGENIAL with thermostat, designed as flush-mounted shower in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

- Concealed shower box with bonding flange CONBOX FLANGE
- Recessed enclosure: ABS, dimensions (WxHxD minimum): 272x232x96 mm, self-supporting
- Fastener brackets for mounting material with max. diameter 8 mm
- · Wall outlet diameter 230 mm can be cut to length of tile front edge, condensate drain slope
- Sealed and sound-insulated brass entrances and exits, inlet with shut-off valves R 1/2
- Detachable connecting coupling for exchange the flushing piece on the water path
- Mounting depth with final assembly set: 96-110 mm
- Flushing piece: ABS, waterless and hygienically tested for leakage
- Protective plug: EPS, dimension (ØxD) 226x40 mm
- Bonding flange made of ABS, (ØxD) 430x12 mm
- · Connection to cold and hot water

Description	Connection	Nominal width	Article number	EUR
CONBOX FLANGE raw-assembling set for concealed shower with bonding flange, thermostat	R 1/2	DN15	CONR1112	506,00

## CONBOX raw-assembling set for concealed shower, DN15





### CONBOX raw-assembling set for concealed shower, DN15

Raw-assembling set for mechanical and electronic shower equipment, designed as flush-mounted shower without thermostat in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

### Consisting of:

- Concealed shower box CONBOX
- Recessed enclosure: ABS, dimensions (WxHxD minimum) 232x9272x6 mm, self-supporting
- Fastener brackets for mounting material with max. diameter 8 mm
- Wall outlet diameter 230 mm can be cut to length of tile front edge, condensate drain slope
- Sealed and sound-insulated brass entrances and exits
- Inlet with shut-off valves R 1/2
- Mounting depth with final assembly set: 96-110 mm
- Flushing piece: ABS, waterless and hygienically, tested for leakage
- Protective plug: EPS, dimension (ØxD) 226x40 mm
- Gasket ring: PE, dimensions (WxH) 450x450 mm, with expansion zone
- Connection to cold and hot water

Description	Connection	Nominal width	Article number	EUR
CONBOX raw-assembling set for concealed shower, without thermostat	R 1/2	DN15	CONR0111	263,00

## CONBOX FIT raw-assembling set for concealed shower, DN15





### CONBOX FIT raw-assembling set for concealed shower, thermostat, DN15

Raw-assembling set for mechanical and electronic shower equipment based on the adaptive multifunctional water path CONGENIAL FIT with thermostat, designed as flush-mounted shower in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

- Concealed shower box CONBOX FIT
- Recessed enclosure: ABS, dimensions (WxHxD minimum): 157x216x127 mm, self-supporting
- Fastener brackets for mounting material with max. diameter 6 mm
- Condensate drain slope, sealed and sound-insulated brass entrances and exits
- Inlet with shut-off valves R 1/2
- Detachable connecting coupling for exchange the flushing piece on the water path
- Mounting depth with final assembly set: 85-112 mm
- Flushing piece: ABS, waterless and hygienically, tested for leakage
- Protective plug: cardboard
- Gasket ring: PE, dimensions (WxH) 400x400 mm, with expansion zone
- Connection to cold and hot water

Description	Connection	Nominal width	Article number	EUR
CONBOX FIT raw-assembling set for concealed shower, thermostat	R 1/2	DN15	CONR2112	201,00

## CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN15



# CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN15

Raw-assembling set for electronic shower equipment, without thermostat as concealed shower in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

### Consisting of:

- Concealed shower box CONBOX SLIM
- Recessed enclosure: PP, dimensions (ØxD) 85x58 mm
- · Wall outlet diameter 80 mm can be cut to length of tile front edge
- Bonding flange: PP dimensions (ØxD) 150x12,5 mm
- Protective plug: EPS, dimension (ØxD) 78x20 mm
- Water path: brass
- Ball valve for shut-off, flushing piece, connection R 1/2
- Extension cable piezo switch: 3 m, 2-pin connector on both sides, protection IP68
- Connection to cold or premixed water

Description	Connection	Nominal width	Article number	EUR
CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN15	R 1/2	DN15	CONR3111	337,00

## CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN20



# CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN20

Raw-assembling set for electronic shower equipment, without thermostat as concealed shower in nominal width DN20. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

- Concealed shower box CONBOX SLIM
- Recessed enclosure: PP, dimensions (ØxD) 85x58 mm
- Wall outlet diameter 80 mm can be cut to length of tile front edge
- Bonding flange: PP dimensions (ØxD) 150x12,5 mm
- Protective plug: EPS, dimension (ØxD) 78x20 mm
- Water path: brass
- Ball valve for shut-off, flushing piece, connection R 3/4
- Extension cable piezo switch: 3 m, 2-pin connector on both sides, protection IP68
- Connection to cold or premixed water

Description	Connection	Nominal width	Article number	EUR
CONBOX SLIM raw-assembling set for concealed shower/ceiling shower, DN15	R 3/4	DN20	CONR3121	353,00

## CONBOX MINI raw-assembling set for concealed shower, DN15/DN20



### CONBOX MINI raw-assembling set for concealed shower, DN15/DN20

Raw-assembling set for electronic shower equipment, without thermostat as concealed shower in nominal width DN15/DN20. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

- Concealed shower box CONBOX MINI
- Recessed enclosure: brass for water hydraulics, with protective sleeve and flushing piece:

  ARS
- Gasket ring: PE, dimensions (WxH) 200x200 mm, with expansion zone
- · Connection to cold or premixed water

Description	Nominal width	Article number	EUR	
CONBOX MINI raw-assembling set for concealed shower	DN15/DN20	CONR4111	248,00	

## Power supply



### Switching power supply unit 12 V/DC / 4,5 A, for DIN rail mounting

Power supply for a maximum of 20 pieces electronic concealed showers or shower panels with and without thermostat, or for maximum of 10 pieces of mechanical concealed showers or shower panels with electronical thermal disinfection.

No pre-arrangement option for key switch usage.

The electrical wiring may only be carried out by an electrician.

Operating voltage: 230 V/AC
Output voltage: 12 V  $\pm$  1% DC
Output current: 0-4,5 A
Output power: 54 W
Protection class: II

Dimensions (WxHxD): 80x72x56 mm

Description	Version	Article number	EUR
Switched power supply unit 12 V/DC /4,5 A for DIN rail mounting	Rail mounting	CONO511000	192,00



### Switched power supply unit, 24 V/DC / 1,5 A, for DIN rail mounting

Power supply for a maximum of 6 pieces electronic concealed shower faucets or shower panels, short-circuit-proof. No pre-arrangement option for key switch usage.

The electrical wiring may only be carried out by an electrician.

Operating voltage: 230 V/AC
Output voltage: 24 V  $\pm$  1% DC
Output current: 0-1,5 A
Output power: 36 W
Protection class: II

Dimensions (WxHxD): 93x78x56 mm

Description	Version	EUR	
Switched power supply unit, 24 V/DC / 1,5 A	Rail mounting	CONO581000	198,00

## Power supply



### Power supply 12 V/DC, in installation box

For power supply of max. 20 electronic showers of the CONGENIAL and CONSMART series. Wall switchboards for wall construction, fully wired, connection via fitted 2 m connection line with safety plug. Pre-arrangement for key switch usage of thermal disinfection or external hygiene flush included.

The electrical wiring may only be carried out by an electrician.

Operating voltage: 230 V/AC
Output voltage: 12 V ±1% DC
Output current: 0-4,5 A
Output power: 54 W
Protection class: II
IP protection: IP65

Dimensions (WxHxD): 200x125x122 mm

Description	Version	Article number	EUR
Power supply 12 V/DC	Installation box, surface-mounted	CONO512000	459,00



### Power supply 12 V/DC, in installation box

For power supply of max. 20 electronic showers of the CONGENIAL serie. Wall switchboards for wall construction, fully wired, connection via fitted 2 m connection line with safety plug. Pre-arrangement for key switch usage of thermal disinfection or external hygiene flush included.

The electrical wiring may only be carried out by an electrician.

Operating voltage: 230 V/AC
Output voltage: 12 V ±1% DC
Output current: 0-4,5 A
Output power: 54 W
Protection class: II
IP protection: IP65

Dimensions (WxHxD): 200x125x122 mm

Description	Version	Article number	EUR
Power supply 12 V/DC	Installation box, surface-mounted	CONO510000	252,00

## Power supply



### Power supply 24 V/DC, in installation box

For power supply of max. 10 electronic showers of the CONPRIMUS serie. Wall switchboards for wall construction, fully wired, connection via fitted 2 m connection line with safety plug.

The electrical wiring may only be carried out by an electrician.

Operating voltage: 230 V/AC

Output voltage: 12 V ±1% DC

Output current: 0-4,5 A

Output power: 54 W

Protection class: II

IP protection: IP65

Dimensions (WxHxD): 125x200x122 mm

Description	Version Article number		EUR
Power supply 24 V/DC	Installation box, surface-mounted	CONO513000	497,00

## Central power supply units for multiple faucet installations



### Concealed central mains power supply, for up to 30 units

### Suitable for

- All lavatory faucets with VARIOconnect in multiple installations for up to 30 units (except lumino L10i and L10c)
- Urinal flush valves with VARIOconnect (U10, U18, U28) up to 30 units
- Multiple installation bypass for lino flush-mounted showers up to 30 units
- Exclusively for use with flush-mounted splitter 550.042.00 or 550.43.00 or 550.044.00

- Concealed mains power supply 110-240 V /12 V
- · With white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves



Description	Device quantity	Voltages	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 30 units	110-240 V /12 V	550.041.00	128,00

## Central power supply unit for multiple faucet installations



### Concealed central mains power supply, for up to 12 units

#### Suitable for

- All lavatory faucets with VARIOconnect in multiple installations up to 12 units (except lumino L10i and L10c)
- Shower panel CONPRIMUS, lavatory faucet lino PRIMUS Stand L40 (single installation)
- Urinal flush valves with VARIOconnect (U10, U18, U28) up to 12 units
- Multiple installation bypass for lino flush-mounted shower faucets up to 12 units
- Exclusively for use with flush-mounted splitters 550.042.00 or 550.43.00 or 550.044.00 (exception CONPRIMUS)

### Consisting of:

- Concealed mains power supply 110-240 V /12 V
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves

Description	Device quantity	Voltage	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 12 units	110-240 V / 12 V	550.045.00	88,00

## Concealed power supply unit for single installation



### Concealed power supply unit for single installation

#### Suitable for:

- Concealed lino shower faucets DV35 / DV30
- Wall-mounted lavatory faucets WV10 / WV20 / GW20 with VARIOconnect
- Single installation bypass for lino flush-mounted shower faucets DV35 / DV30B with VARIOconnect

### Consisting of:

- Concealed mains power supply 110-240 V /12 V
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets

Description	Installation type	Voltage	Article number	EUR
Concealed power supply unit with flush-mounted outlet	for single installation	110-240 V /12 V	550.026.00	79,00

## Splitter for multiple installations with VARIOconnect



### Concealed splitter set for multiple installations with surface-mounted outlet

- Exclusively for use with the flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- Not compatible with lumino L10i and L10c
- One splitter set required per connected unit and bypass solenoid valve

- Concealed box with white cover and cable grommet
- Splitter for voltage range 12 VAC/VDC 28 VAC/VDC
- 3 Terminals (1x input, 1x output looped, 1x 6V output)
- Installation cable 850 mm routed through the cover, with plug-in connector for faucets

Description	Installation type	Article number	EUR
Concealed splitter set for multiple installations with surface-mounted outlet	For multiple installations	550.043.00	52,00

## Splitter for multiple installations of units with VARIOconnect



### Concealed splitter set with flush-mounted outlet for multiple installations

- Exclusively for use with the flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00) with VARIOconnect
- Not compatible with lumino L10i and L10c
- One splitter set is required for each connected unit and bypass solenoid valve

### Consisting of:

- · Concealed box with white cover
- Splitter for voltage range 12 VAC/VDC 28 VAC/VDC
- 3 Terminals (1x input, 1x output looped, 1x 6 V output)
- Installation cable 3000 mm with plug-in connector for faucets/flush valves



Description	Installation type	Article number	EUR
Concealed splitter set with flush-mounted outlet	For multiple installations	550.042.00	49,00



### Concealed splitter for multiple installations


#### Suitable for:

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- One splitter set required per connected faucet/urinal flush valve and bypass solenoid valve

### Consisting of:

- Splitter for voltage range 12 VAC/VDC 28 VAC/VDC
- 3 Terminals (60 mm)

Description	Installation type	Article number	EUR
Concealed splitter set	for multiple installations	550.044.00	45,00



### Concealed splitter for multiple installations

### Suitable for:

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- One splitter set required per connected faucet/urinal flush valve and bypass solenoid valve

- Splitter for voltage range 12 VAC/VDC 28 VAC/VDC
- 3 Terminals (60 mm)
- Installation cable with length (x) and plug-in connector for faucets

Description	Installation type	Length (x)	Article number	EUR
Consideration of	for multiple installation	1200 mm	550.044.12	48,00
Concealed splitter set	for multiple installation	3200 mm	550.044.32	52,00



## Coin validator CONCASH 2.0, 1 shower, 1 coin type





0 1

260





Coin validator for a shower enclosure with CONCASH 2.0 showers, paid water release via a coin type

Suitable for use in outdoor and wet areas, stainless steel housing, splash-proof electronics and connection via safety extra-low voltage.

### Consisting of:

- LED display: 3-digit, red, with display of remaining showering time
- Usage-dependent automatic hygienic flush, flushing interval and hygienic flush duration adjustable via display
- Setting the minimum insertion
- Price and time selection via display

Operating voltage: 24 V/DC
Operating temperature: 0-40 °C
Operating humidity: 30-70 %
Dimensions (WxHxD): 160x260x110 mm

Weight: 3,5 kg

**Required accessories:** CONO511000 Central mains power supply

Description	Numb. of showers	Version	Article number	EUR
Coin validator 1 shower	1	1 coin type	CONO138100	1.563,00

## Coin validator CONCASH 2.0, 1 shower, coins/tokens



Coin validator for a shower enclosure with CONCASH 2.0 showers, paid water release on several types of coins and tokens

Suitable for use in outdoor and wet areas, stainless steel housing, splash-proof electronics and connection via safety extra-low voltage.

### Consisting of:

- LED display: 3-digit, red, with display of remaining showering time
- Use-dependent automatic hygienic flush
- Flushing interval and hygienic flush duration adjustable via display
- Setting the minimum insertion
- Price and time selection via display


Coin types: 0,10 to 2,00 EUR Operating voltage: 24 V/DC Operating temperature: 0-40 °C Operating humidity: 30-70 % Dimensions (WxHxD): 160x260x110 mm


Weight: 3,5 kg

Required accessories: CONO511000 Central mains power supply









Description	Numb. of showers	Version	Article number	EUR
Coin validator 1 shower	1	Coins and tokens	CONO138200	1.950,00

Description	Packaging unit	Article number	EUR
Tokens	100	CONO138299	205,00

## Coin validator CONCASH 2.0, 4 showers, coins/tokens



Coin validator for max. four shower enclosures with CONCASH 2.0 showers, paid water release on several types of coins and tokens

Suitable for use in outdoor and wet areas, stainless steel housing, splash-proof electronics and connection via safety extra-low voltage.

### Consisting of:


- LED display: 8-digit, red
- Setting the minimum insertion
- Price and time selection via display per terminal differently adjustable
- Per button multi-coloured status LEDs for terminal selection display
- Evaluation of the cash meter and operating hours counter possible
- Use-dependent automatic hygienic flush
- Separate PowerBox\* for power supply with relay outputs

Coin types: 0,10 to 2,00 EUR
Operating voltage: 24 V/DC
Operating temperature: 0-40 °C
Operating humidity: 30-70 %
Dimensions (WxHxD): 320x300x155 mm

Weight: 7 kg





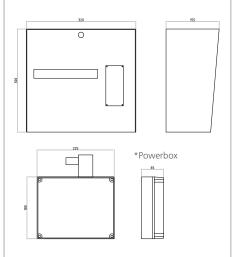

Description	Numb. of showers	Version	Article number	EUR
Coin validator 4 showers	up to 4	Coins and tokens	CONO131040	5.463,00

Description	Packaging unit	Article number	EUR
Tokens	100	CONO138299	205,00

## Coin validator CONCASH 2.0, 4 showers, EC/ credit cards



Coin validator for max. four shower enclosures with CONCASH 2.0 showers, paid water release via EC and credit card reader

Suitable for use in outdoor and wet areas, stainless steel housing, splash-proof electronics and connection via safety extra-low voltage.

### Consisting of:


- EC and credit card terminal for online payment up to 25 EUR per transaction
- · LED display: 8-digit, red
- Price and time selection via display per terminal differently adjustable
- Per button multi-coloured status LEDs for terminal selection display
- Evaluation of the cash meter and operating hours counter possible
- Use-dependent automatic hygienic flush
- Separate PowerBox\* for power supply with relay outputs

Operating voltage: 24 V/DC
Operating temperature: 0-40 °C
Operating humidity: 30-70 %
Dimensions (WxHxD): 320x300x155 mm

Weight: 7 kg





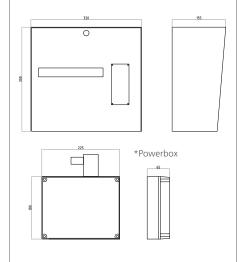

Description	Numb. of showers	Version	Article number	EUR
Coin validator 4 showers	up to 4	EC- and credit cards	CONO131045	9.410,00

## Coin validator CONCASH 2.0, 8 showers, coins/tokens



Coin validator for max. eight shower enclosures with CONCASH 2.0 showers, paid water release on several types of coins and tokens

Suitable for use in outdoor and wet areas, stainless steel housing, splash-proof electronics and connection via safety extra-low voltage.

### Consisting of:


- LED display: 8-digit, red
- Setting the minimum insertion
- Price and time selection via display per terminal differently adjustable
- Per button multi-coloured status LEDs for terminal selection display
- Evaluation of the cash meter and operating hours counter possible
- Use-dependent automatic hygienic flush
- Separate PowerBox\* for power supply with relay outputs

Coin types: 0,10 to 2,00 EUR
Operating voltage: 24 V/DC
Operating temperature: 0-40 °C
Operating humidity: 30-70 %
Dimensions (WxHxD): 320x300x155 mm

Weight: 7 kg






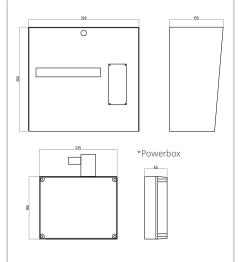

Description	Numb. of showers	Version	Article number	EUR
Coin validator 8 showers	up to 8	Coins and tokens	CONO131080	7.346,00

Description	Packaging unit	Article number	EUR
Tokens	100	CONO138299	205,00

### Thermal disinfection set for mechanical CONTI+ showers



### Thermal disinfection set for mechanical CONTI+ showers

Upgrade of mechanical faucets for electronic thermal disinfection of shower installations based on the adaptive multifunctional water path CONGENIAL. Distributor connection for supplying the bistable solenoid valve to be installed in the bypass. The control electronics supplied allow the thermal disinfection to be triggered by a key switch (not included). Can be triggered by means of a key switch (not included in scope of delivery).

### Consisting of:

- Distributor connection mains / bypass
- Solenoid valve 6 V/DC ROBUST, bistable
- Control electronics bypass 6 V/DC
- Transverter 12-28 VAC/DC / 6 VDC

Protection class: IP68

Description	Version	Article number	EUR
CONTI+ Thermal disinfection set	for mechanical CONTI+ showers	CONO321000	154,00

## Thermal disinfection retrofitting set for electronic CONTI+ showers



### Thermal disinfection retrofitting set for electronic CONTI+ showers

Retrofitting of electronic faucets for electronic thermal disinfection of shower units based on the adaptive multifunctional water path CONGENIAL or the compact water path CONSMART with mains power supply. Electronic control retrofit set for integration of the solenoid valve to be installed in the bypass. Triggering of thermal disinfection via key switch (not included in scope of delivery). Operation via the Service APP or integration into the CNX Water Management System.

### Consisting of:

- Solenoid valve 6 V/DC ROBUST, bistable
- Electronic control unit thermal disinfection 6 V/DC

Protection class: IP68

### Note

When integrated into the CNX Water Management System, a CNX Converter 30 V/DC-6 V/DC and a temperature sensor must be ordered separately.

Conversion to battery version on request.

Description	Version	Article number	EUR
CONTI+ Thermal disinfection retrofitting set	for electronic CONTI+ showers	CONO322000	346,00



### CONTI+ Spare parts list

CONTI+ spare parts list for shower- and washrooms for:

- Spare parts
- Accessories and optional functions
- Exploded assembly drawings

### Download:

 $https://conti.plus/fileadmin/conti.plus/world/downloads/SPARE-PARTS-Catalouge\_EN.pdf$ 



Installation and maintenance videos: https://www.youtube.com/channel/UCMd3Te3wmkiuhkgG8GPaLQQ



## Key switch set



### Key switch set, switch key version, for CNX

For enabling faucets with bypass solenoid valve, for thermal disinfection when connected to CNX. Version with switch key function. For wall mounting.

### Consisting of:

- · Surface-mounted plastic housing
- · Key switch with key

Dimensions (WxHxD): 80x72x56 mm (without key)

Protection class: IP45

### Note:

Can only be used in conjunction with CNX Water Management System.

Description	Version	Article number	EUR
Key switch set	Switch key	CONO330000	259,00



### Key switch set, switch version

For enabling taps with bypass solenoid valve for thermal disinfection or for central triggering of hygiene flush. Version with switch function. For wall mounting.

### Consisting of:

- · Surface-mounted plastic housing
- Key switch with key

Dimensions (WxHxD): 80x72x56 mm (without key)

Protection class: IP45

### Note:

Suitable for all applications except in conjunction with CNX Water Management System.

Description	Version	Article number	EUR
Key switch set	Switch	CONO330010	257,00

## Manual plug TD



### Manual plug TD

For installation in CONTI+ faucets and shower bodies as a bypass valve for performing a manual thermal disinfection.

Operating pressure: 0,3-10,0 bar

Flow rate: 0,05 l/s (automatic flow limiter)

Water temperature max.: 70 °C (shortly up to 80 °C for thermal disinfection)

Description	Material Material	Article number	EUR
TD plug	Brass	CONO310000	117,00

## **CNX** Converter



#### CNX Converter 6V

To integrate CONTI+ faucets (with the exception of CONPRIMUS and lino PRIMUS upright faucet L40) into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 30 V to 6 /12 V.

Operating voltage: 30 V/DC Input: Approx. 17 mA Protection: IP68 **Notice:** CONO214641 includes:
• Flush-mounted socket for masonry

• Flush-mounted socket for dry construction

Description	Material	Article number	EUR
CNX Converter 6V	Plastic	CONO210000	177,00
CNX Converter for flush-mounted socket 6V	Plastic	CONO214641	275,00



#### CNX Converter 12 V

To integrate CONTI+ faucets CONPRIMUS and lino PRIMUS upright faucet L40 into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 24V to 12V.

Operating voltage: 12 V/DC Input: Approx. 17 mA Protection: IP68 **Notice:** CONO211012 includes:
• Flush-mounted socket for masonry

• Flush-mounted socket for dry construction

Description	Material	Article number	EUR
CNX Converter 12 V (CONPRIMUS)	Plastic	CONO210012	177,00
CNX Converter for flush-mounted socket 12 V	Plastic	CONO211012	275,00

## **BLE Converter for Service APP**



#### BLE Converter for CONTI+ Service APP

To build up a Bluetooth® connection between CONTI+ faucets and a mobile control unit as smartphone or tablet. Smart faucet connection via CONTI+ Service APP.

## Technical data:

Bluetooth® low energy Operating voltage:

Operating voltage: 6-12 V/DC Protection: IP68

Description	Colour	Article number	EUR
BLE Converter	Black	CONO260000	67,00

## Solenoid valve



#### Solenoid valve

For installation in CONTI+ faucet bodies as a bypass solenoid valve for carrying out an electronic thermal disinfection, with connection cable and plug, with flow rate regulator.

Technical data:

Operating voltage: 6 V/DC Input: 3 W
Operating pressure: 0,3-10,0 bar

Flow rate: 0,05 l/s (automatic flow regulator)

Water temperature max.: 70 °C (short-term up to 80°C for thermal disinfection)

Protection: IP68

Description	Material	Article number	EUR
Solenoid valve	Plastic casing	CONO320000	166,00

## CONGENIAL temperature sensor



## Temperature sensor for CONGENIAL water path

Immersion sensor for logging the temperature during thermal disinfection of CONTI+ valves based on the CONGENIAL water path, integrated into the CNX Water Management System. For screwing into the water section housing. With connecting cable and plug.

#### Technical data:

Material immersion sleeve: Stainless steel 1.4571

Diving length (approx.): 15 mm

Material thread connection: Brass
Thread: M10 x 1

Length of connecting cable: 300 mm

Protection class: IP68

Description	Version	Article number	EUR
CONGENIAL temperature sensor	Immersion sensor	CONO410000	62,00

## CONSMART temperature sensor



#### Temperature sensor for CONSMART water path

Contact sensor for recording the temperatures during thermal disinfection for CONTI + valves, based on the CONSMART water path, integrated in the CNX Water Management System. For insertion in the water path casing. Fixing device with hexagon screw. With connection cable and plug.

#### Technical data:

Material: Stainless steel 1.4571

Protection class: IP68

Description	Version	Article number	EUR
CONSMART temperature sensor	Contact sensor	CONO410010	54,00

## Retrofit set cleaning stop



#### Retrofit set cleaning stop for electronic showers

Time-out of water flow activation during cleaning operations by placing the RC switch on the underside of the shower panel, to the right or above the piezo button on the cover plate.

#### Notice

Concealed showers and shower panels, integrated into the CNX Water Management System, already include the cleaning stop function.

#### Consisting of:

- Control electronics retrofit set
- Reed contact
- RC switch, magnet with handle

Description	Version	Article number	EUR
Retrofit set cleaning stop	Shower installation	CONO610000	232,00

## Cable J-Y(St)Y



#### Cable J-Y(St)Y, 2x2x0,8 mm


For electrical wiring of CONTI+ showers, lavatory faucets and urinal flush valves

Outside coat: PVC, grey Outer diameter: 7 mm


Temperature range: -30 °C to 70 °C, shielding by foil


Description	Packaging unit	Article number	EUR
Cable J-Y(St)Y, 2x2x0,8 mm	100 m	CONO220000	149,00

## **Traverses**

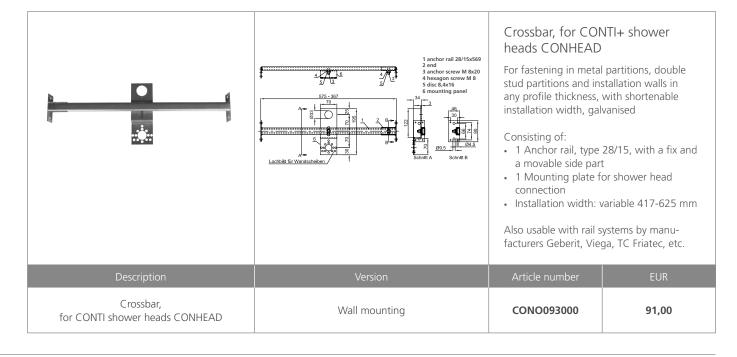



## Traverses

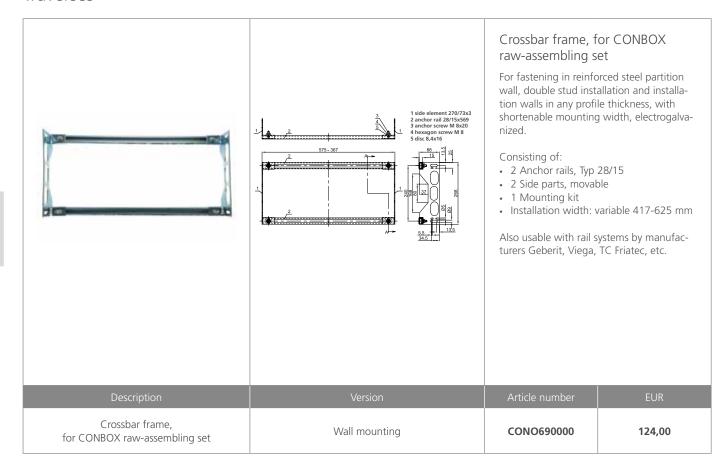

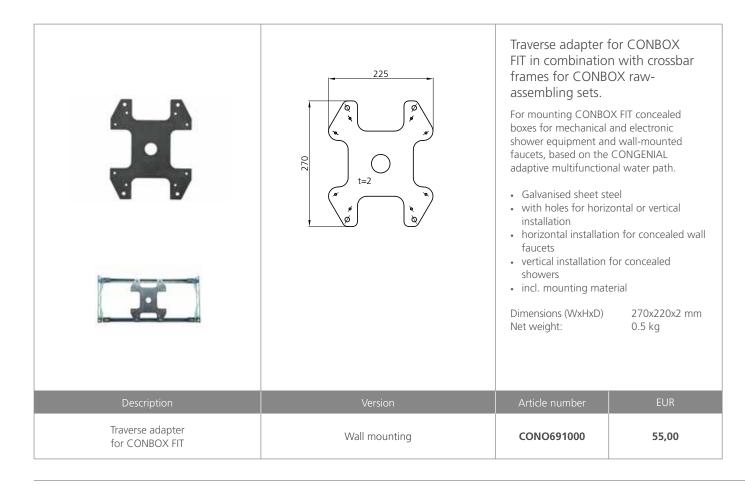

## Cover extensions

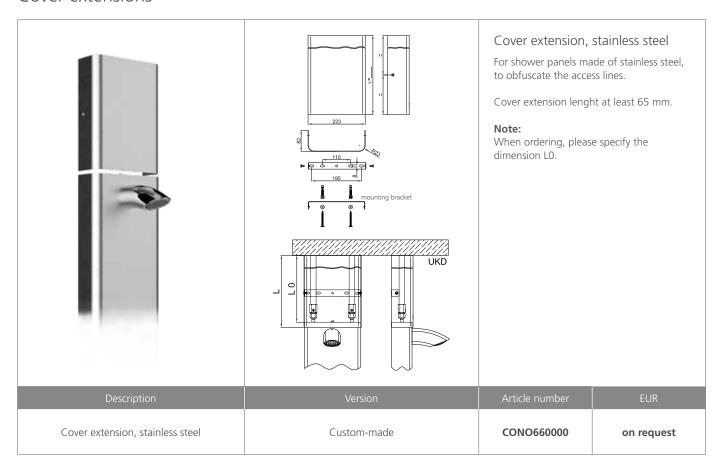

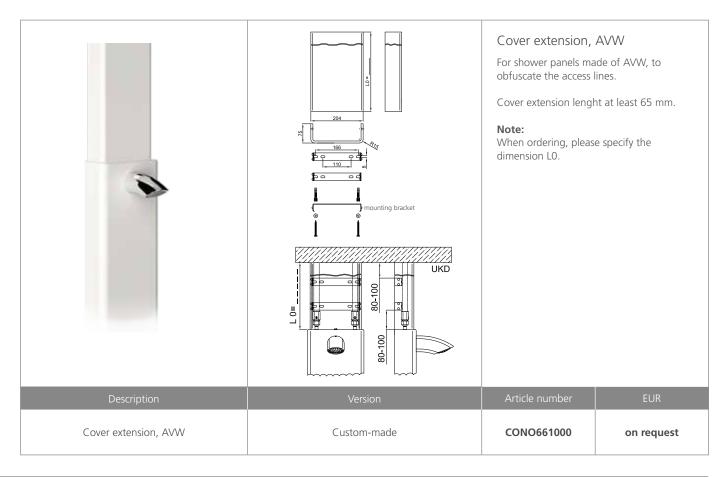

## Connection hose set




## Connection hose set for CONGENIAL shower panels


Connection from above and behind, incl. two flexible hoses, flat gaskets and connection angles.

Hose length: 1330 mm Connection: R 1/2

Description	Connection	Article number	EUR
Connection hose set for CONGENIAL shower panels	R 1/2	CONO670010	81,00

## Soap dishes for shower faucets

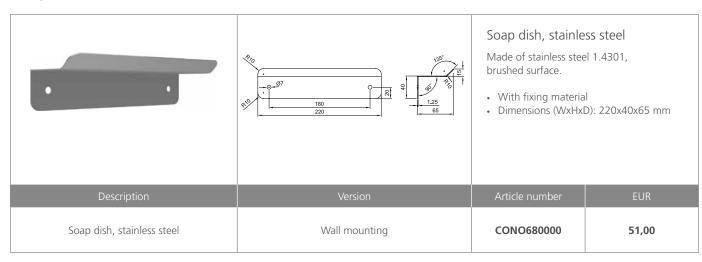

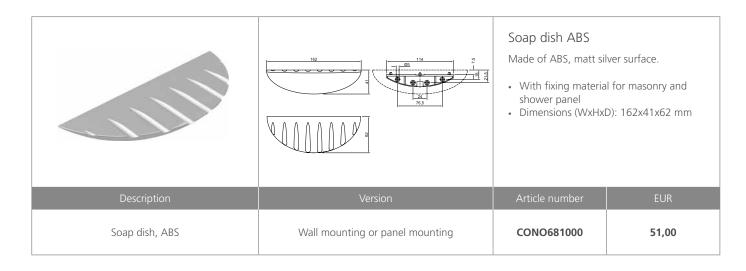

## Cleaning products



## Microfiber cloth (grey)

Soft microfiber cloth for professional use. With velvety surface for slightly textured, smooth and delicate surfaces, very good for cleaning stainless steel, chromed, aluminium, faucets and lacquered surface, washable up to 95  $^{\circ}$ C.

Description	Dimension	Article number	EUR
Microfiber cloth grey	Approx. 400x400 mm	CONO690200	16,00



#### Cleaner BR75

Swimming pool and sanitary cleaners for all public and private swimming pools, toilets (urinals), showers and bath rooms, acid-resistant tiles and sanitary porcelain, as well as for removal of cement veils.

Description	Filling quantity	Article number	EUR
Cleaner BR75	1000 ml	CONO690100	41,00

## Tool kit




## Tool kit for service and assembly of CONTI+ faucets

#### Consisting of:

- 1 Hook wrench 38 mm
- 1 Allen key SW 3x36x16,5
- 1 Face spanner adjustable
- 1 Face spanner-screwdriver with handle
- 1 Hexagon key SW 2x100
- 1 Hexagon key SW 2,5x1001 Hexagon key SW 3x100
- 1 Hexagon key SW 6x160
- 1 Hexagon key SW 6x160
   1 Allen key SW 4x140x28
- Alleri Key 3VV 4X I<sup>2</sup>

   Alleri Key 3VV 4X I<sup>2</sup>
- 1 Microfiber cloth
- 1 Tool-belt bag

Description	Colour	Article number	EUR
Tool kit for service and assembly of CONTI+ faucets	Black/Blue	CONO690300	155,00

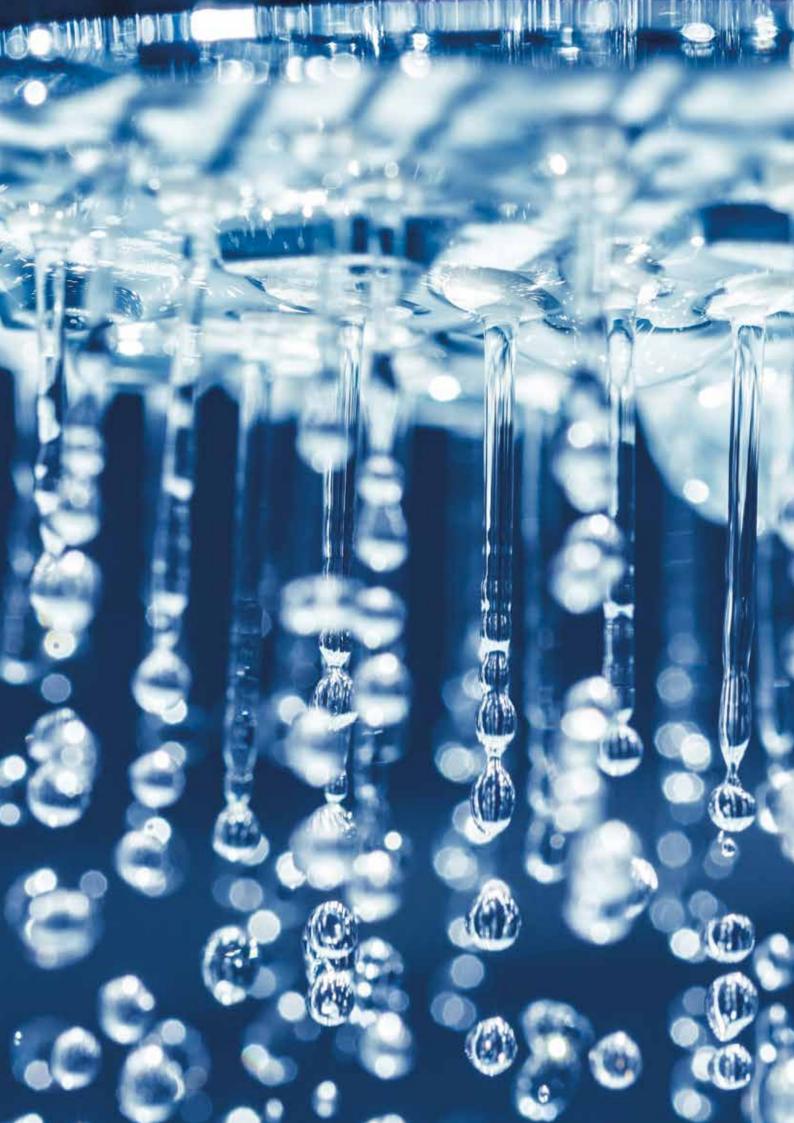





# 17.5 44 120

## CONHEAD jet shower head GOLF, DN15

Consisting of:

- Shower head fixed, heavy, solid version made of brass, with low maintenance single jet nozzle, low aerosol, chromed
- Brass plug-in connection (pre-assembled with shower panels) with integrated flow rate limiter.


Connection: G 1/2 B

Flow rate: 0,15 l/s (flow rate controller)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 120 mm Flow angle: 16°


#### Optionally combineable with:

CONO091000 Ball-type nozzle

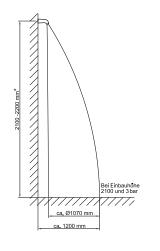

Description	Installation	Material / Colour	Article number	EUR
CONHEAD jet shower head GOLF, DN 15	For shower panels	Chromed	CONO010010	175,00
	For wall mounting	Chromed	CONO010000	175,00

# 103



## CONHEAD jet shower head CITY, DN15

Consisting of:

- Shower head fixed, heavy, solid version made of brass, chromed, with integrated swirl insert and low maintenance single jet nozzle, low aerosol, or alternatively made of stainless steel, mate 1 4404
- Brass plug-in connection (pre-assembled with shower panels), with integrated flow rate limiter

Connection: G 1/2 E

Flow rate: 0,15 l/s (flow rate controller)

 $\begin{array}{ll} \mbox{Minimum flow pressure:} & 1,0 \mbox{ bar} \\ \mbox{Max. water temperature:} & 75 \mbox{ °C} \\ \mbox{Projection:} & 90 \mbox{ mm} \\ \mbox{Flow angle:} & 18 \mbox{ } \end{array}$ 

Version with flow rate limiter available in 0.1 l/s and 0.2 l/s


#### Optionally combineable with:

CONO091000 Ball-type nozzle

Description	installation	Material / Colour	Article number	EUR
CONHEAD introducer hand CITY DN 15	For shower panels	Chromed	CONO050010	175,00
CONHEAD jet shower head CITY, DN 15	For shower panels	Stainless steel	CONO051010	317,00
CONHEAD jet shower head CITY, DN 15	For wall mounting	Chromed	CONO050000	175,00
	For wall mounting	Stainless steel	CONO051000	317,00



## 70 80 17.5 26-28 16°



## CONHEAD jet shower head VESUV, DN15

Consisting of:

- Shower head fixed, heavy, solid version made of brass, with integrated swirl insert and low maintenance single jet nozzle and fixed flow angle, low aerosol, chromed
- Brass plug-in connection (pre-assembled with shower panels), with integrated flow rate limiter

Connection: G 1/2

Flow rate: 0,15 l/s (flow rate controller)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 53 mm Flow angle: 16°

#### Optionally combineable with:

CONO91000 Ball-type nozzle

Description	Installation	Material / Colour	Article number	EUR
CONHEAD jet shower head VESUV, DN15	For shower panels	Chromed	CONO060010	175,00
	For wall mounting	Chromed	CONO060000	175,00



## 70 80 80 17.5 26.28 60 16°±11°

## CONHEAD jet shower head VESUV, DN15, with adjustable flow angle

Consisting of

• Shower head fixed, heavy, solid version made of brass, with integrated swirl insert and low maintenance single jet nozzle, with adjustable flow angle, low aerosol, chromed

Brass plug-in connection (pre-assembled with shower panels), with integrated flow rate limiter


Connection: G 1/2 B

Flow rate: 0,15 l/s (flow rate controller)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C

Projection: With adjustable jet inclination

Flow angle: 16°±11°

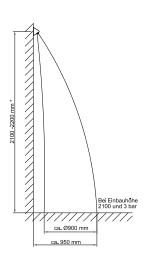

Description	Installation	Material / Colour	Article number	EUR
COHEAD jet shower head VESUV, DN15	For shower panels	Chromed	CONO061010	205,00
with adjustable jet inclination	For wall mounting	Chromed	CONO061000	205,00

## CONHEAD rain shower head



## 145 980 20 0 17.5 44 110 11° bzw. 21°

## CONHEAD rain shower head RAIN2, DN15


#### Consisting of:

- Shower head fixed, heavy, solid version made of brass, shower base made from GRP and anti-scaling nozzle with invisible, theft-proof fixings, normal jet, with adjustable flow angle, low aerosol, chrome plated housing
- Brass plug-in connection (pre-assembled with shower panels), with integrated flow rate limiter

Connection: G 1/2 B

Flow rate: 0,15 l/s (flow rate limiter)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 110 mm Flow angle: 11° or 21°

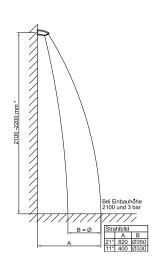

Description	Installation	Material / Colour	Article number	EUR
CONHEAD rain shower head RAIN2, DN15	For shower panels	Chromed	CONO020010	222,00
	For wall mounting	Chromed	CONO020000	248,00

## CONHEAD rain shower head



# 

## CONHEAD rain shower head SHORTY, DN15


#### Consisting of:

- Shower head fixed, heavy, solid version made of brass, shower base made from GRP and anti-scaling nozzle with invisible, theft-proof fixings, normal jet, with adjustable flow angle, low aerosol, chrome plated housing
- Brass plug-in connection (pre-assembled with shower panels), with integrated flow rate limiter

Connection: G 1/2 B


Flow rate: 0,15 l/s (flow rate limiter)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 45 mm Flow angle: 11° or 21°

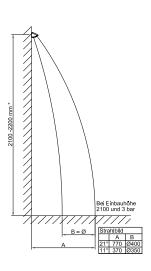

Description	Installation	Material / Colour	Article number	EUR
CONTIEND OF THE PROPERTY DAME	For shower panels	Chromed	CONO030010	144,00
CONHEAD rain shower head SHORTY, DN15	For wall mounting	Chromed	CONO030000	201,00

## CONHEAD shower head kit

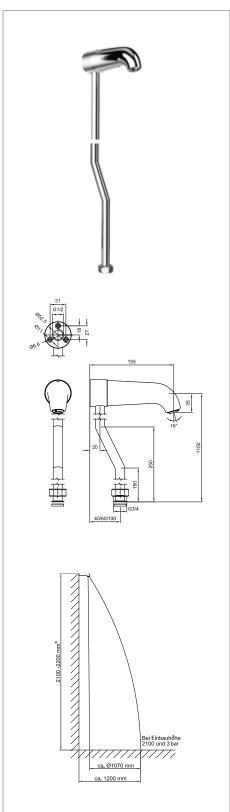

## CONHEAD shower head kit GOLF, DN15

#### Consisting of:

- Shower head fixed, heavy, solid version made of brass, with integrated swirl insert and low maintenance single jet nozzle, low aerosol, chromed
- Brass plug-in connection, with integrated flow rate limiter
- Shower riser made of brass Ø 18 mm, trimmed to length, with adapter for wall mounting and fasteners


Connection: G 3/4

Flow rate: 0,15 l/s (flow rate limiter)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 155 mm Flow angle: 11° or 21°

Description	Wall distance	Dimension	Article number	EUR
CONHEAD shower head kit GOLF	40 mm	DN15	CONO010040	418,00
	60 mm	DN15	CONO010060	418,00
	100 mm	DN15	CONO010100	418,00

## CONHEAD shower head kit

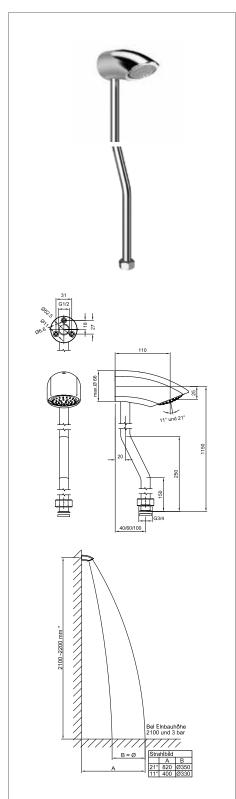

## CONHEAD shower head kit RAIN2, DN15

#### Consisting of:

- Shower head fixed, heavy, solid version made of brass, shower base made from GRP and anti-scaling nozzle with invisible, theft-proof fixings, normal jet, with adjustable flow angle, low aerosol, chrome plated housing
- Brass plug-in connection, with integrated flow rate limiter
- Shower riser made of brass Ø 18 mm, trimmed to length, with adapter for wall mounting and fasteners

Connection: G 3/4

Flow rate: 0,15 l/s (flow rate limiter)

Minimum flow pressure: 1,0 bar Max. water temperature: 75 °C Projection: 110 mm Flow angle: 16°

Description	Wall distance	Dimension	Article number	EUR
CONHEAD shower head kit RAIN2	40 mm	DN15	CONO020040	468,00
	60 mm	DN15	CONO020060	468,00
	100 mm	DN15	CONO020100	468,00

## CONHEAD hand shower set



## CONHEAD hand shower set, DN15

#### Consisting of:

- Hand shower made of plastic, with anti-scaling nozzles as hygienic single jet version, chromed
- Shower riser, 1000 mm long, solid, stainless steel, fine mat finish, Ø 22 mm, with infinitely
  adjustable handheld shower bracket made of stainless steel and plastic coated modular
  elements, with ergonomically curved handle for safe and easy single handed height
  adjustment without twisting
- With wall brackets made of aluminium, black-grey (RAL 7021), Ø 70 mm, for flush mounting by covering panel made of stainless steel, fine mat finished covers, incl. fasteners for solid masonry

Connection: G 1/2 Overall length: 1000 mm

Description	Installation	Material / Colour	Article number	EUR
CONHEAD hand shower set	for shower panels	Chromed	CONO040010	444,00
	for wall installation	Chromed	CONO040000	444,00

## Wall elbow




## Wall elbow, DN15


Wall elbow, high-gloss chromed, intrinsically safe according to DIN EN 1717, design housing made of plastic

Connection: G 1/2

Description	Dimension	Material / Colour	Article number	EUR
Wall elbow	DN15	Plastic, high-gloss chromed	CONO092000	60,00

## Wall duct





#### Wall duct DN15

Consisting of:


- Waterproof wall duct, designed as a wall plate
- With extension and flexible gasket ring

Connection inlet: G 1/2
Connection outlet: G 1/2
Gasket ring: 150x150 mm
Total lenght: 115 mm

Description	Dimension	Material	Article number	EUR		
Wall duct with gasket ring	DN15	Brass	CONO090000	125,00		

## Adapter





## Adapter for shower heads, DN15

Adapter for plug connection (small) for retrofitting shower panels and wall-mounted shower heads CONHEAD GOLF and RAIN2

## Consisting of:

Brass base body, with setscrew for fixation


Length: 69 mm Diameter: 33 mm

Description	Dimension	Material	Article number	EUR
Adapter for shower heads GOLF and RAIN2	DN15	Brass	CONO094000	17,00









# CONWELL rain shower head round, 150, DN15

For wall and ceiling mounting via shower pipes or shower arm.

#### Consisting of:


- Ceiling-mounted, multi-hole shower heads, made of brass, soft jet, low aerosol, with anti-scale nozzles, chromed
- Ball joint connection, chrome


Connection: G 1/2
Diameter: 150 mm
Flow rate: 0,4 l/s
(3 bar flow

Flow pressure (min.): pressure) 0,5 bar Water temperature (max.): 70  $^{\circ}$ C

Description	Diameter	Material / Colour	Article number	EUR
CONWELL rain shower head round, DN15	150 mm	Chromed	CONH04131000150	237,00







# CONWELL rain shower head round 100, DN15

For wall and ceiling mounting via shower tube or shower arm.

- Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

## Consisting of:

- Shower head: stainless steel AISI 304, chromed
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): 1,0 bar

Flow rate: 9 l/min. (flow rate


controller)

Water temperature (max.): 70 °C (short-term


for TD 80 °C)


Weight empty: 0,4 kg
Diameter: 100 mm
Number of nubs: 30 pieces
Connection: G 1/2 B
Flow pressure (max.): 3,0 bar

Description	Diameter	Material / Colour	Bestellnummer	EUR
CONWELL rain shower head round, DN15	100 mm	Chromed	CONH14131000100	184,00

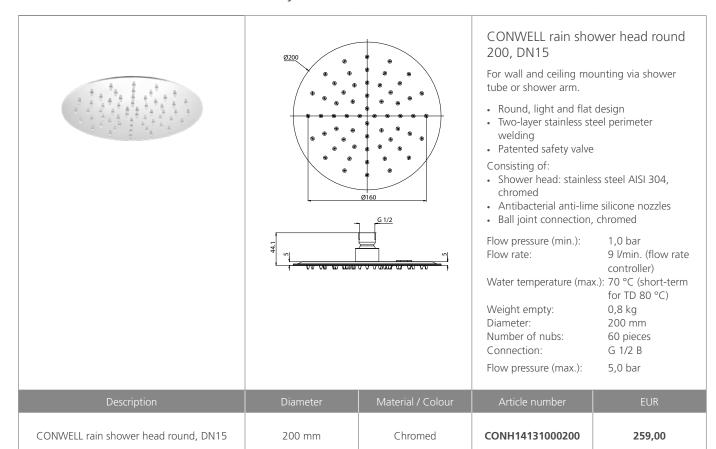







## CONWELL rain shower head round 250, DN15

For wall and ceiling mounting via shower tube or shower arm.

- Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

## Consisting of:

- Shower head: stainless steel AISI 304,
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.):

9 l/min. (flow rate Flow rate:

controller)


Water temperature (max.): 70 °C (short-term

for TD 80 °C)

Weight empty: 1,0 kg Diameter: 250 mm Number of nubs: 88 pieces Connection: G 1/2 B 5,0 bar

Flow pressure (max.):

Description	Diameter	Material / Colour	Article number	EUR
CONWELL rain shower head round, DN15	250 mm	Chromed	CONH14131000250	306,00

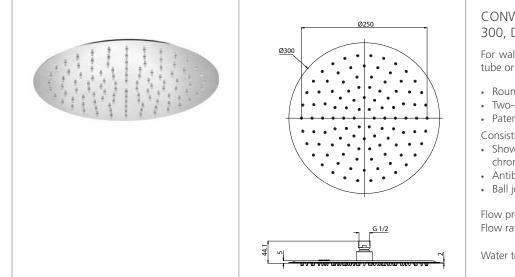

## CONWELL rain shower head round 300, DN15

For wall and ceiling mounting via shower tube or shower arm.

- · Round, light and flat design
- Two-layer stainless steel perimeter welding
- · Patented safety valve

#### Consisting of:

- Shower head: stainless steel AISI 304, chromed
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): 1,0 bar Flow rate: 15 l/min. (flow rate controller)


Water temperature (max.): 70 °C (short-term

for TD 80 °C)

Weight empty: 1,2 kg 300 mm Diameter: Number of nubs: 108 pieces Connection: G 1/2 B 5,0 bar Flow pressure (max.):

Description	Diameter	Material / Colour	Article number	EUR
CONWELL rain shower head round, DN15	300 mm	Chromed	CONH14131000300	426,00







## CONWELL rain shower head round 400, DN15

For wall and ceiling mounting via shower tube or shower arm.

- Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

## Consisting of:

- Shower head: stainless steel AISI 304,
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): Flow rate: 15 l/min. (flow

rate controller)


Water temperature (max.): 70 °C (short-term


for TD 80 °C)

1,6 kg Weight empty: Diameter: 400 mm Number of nubs: 126 pieces Connection: G 1/2 B Flow pressure (max.): 5,0 bar

Description	Diameter	Material / Colour	Article number	EUR
CONWELL rain shower head round, DN15	400 mm	Chromed	CONH14131000400	671,00







#### CONWELL rain shower head square 100, DN15

For wall and ceiling mounting via shower tube or shower arm.

- · Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

#### Consisting of:

- Shower head: stainless steel AISI 304, chromed
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): 1,0 bar

9 l/min. (flow rate Flow rate:

controller)


Water temperature (max.): 70 °C (short-term

for TD 80 °C)

0,5 kg Weight empty: Dimensions: 100x100 mm Number of nubs: 30 pieces G 1/2 B Connection: Flow pressure (max.): 3,0 bar

CONWELL rain shower head square, DN15 100x100 mm Chromed CONH14133000100 193,00





## CONWELL rain shower head square 200, DN15

For wall and ceiling mounting via shower tube or shower arm.

- · Round, light and flat design
- Two-layer stainless steel perimeter welding
- · Patented safety valve

## Consisting of:

- Shower head: stainless steel AISI 304,
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): 1,0 bar

9 l/min. (flow rate Flow rate:

controller)

Water temperature (max.): 70 °C (short-term


for TD 80 °C)


Weight empty: 1,0 kg Dimensions: 200x200 mm Number of nubs: 64 pieces Connection: G 1/2 B 5,0 bar

Flow pressure (max.):

Description	Dimensions	Material / Colour	Article number	EUR
CONWELL rain shower head square, DN15	200x200 mm	Chromed	CONH14133000200	225,00







# CONWELL rain shower head square 250, DN15

For wall and ceiling mounting via shower tube or shower arm.

- Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

#### Consisting of:

- Shower head: stainless steel AISI 304, chromed
- Antibacterial anti-lime silicone nozzles
- · Ball joint connection, chromed

Flow pressure (min.): 1,0 bar

Flow rate: 9 l/min. (flow rate

controller)

Water temperature (max.): 70 °C (short-term


for TD 80 °C)

Weight empty: 1,2 kg
Dimensions: 250x250 mm
Number of nubs: 80 pieces
Connection: G 1/2 B
Flow pressure (max.): 5,0 bar

Description Dimensions Material / Colour Article number EUR

CONWELL rain shower head square, DN15 250x250 mm Chromed CONH14133000250 285,00



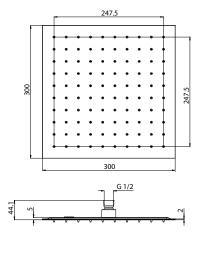

# CONWELL rain shower head square 300, DN15

For wall and ceiling mounting via shower tube or shower arm.

- Round, light and flat design
- Two-layer stainless steel perimeter welding
- Patented safety valve

## Consisting of:

- Shower head: stainless steel AISI 304, chromed
- Antibacterial anti-lime silicone nozzles
- Ball joint connection, chromed

Flow pressure (min.): 1,0 bar Flow rate: 15 l/min. (flow

rate controller)


Water temperature (max.): 70 °C (short-term

for TD 80 °C)


Weight empty: 1,4 kg
Dimensions: 300x300 mm
Number of nubs: 100 pieces
Connection: G 1/2 B

Flow pressure (max.): 5,0 bar

Description	Dimensions	Material / Colour	Article number	EUR
CONWELL rain shower head square, DN15	300x300 mm	Chromed	CONH14133000300	432,00

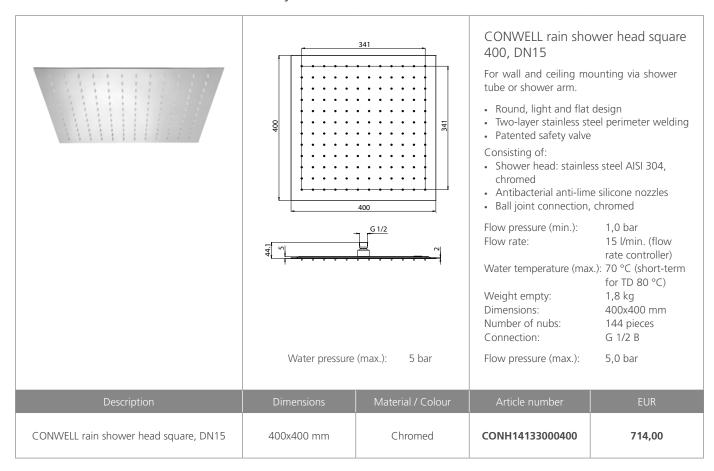



## CONWELL spiked shower head

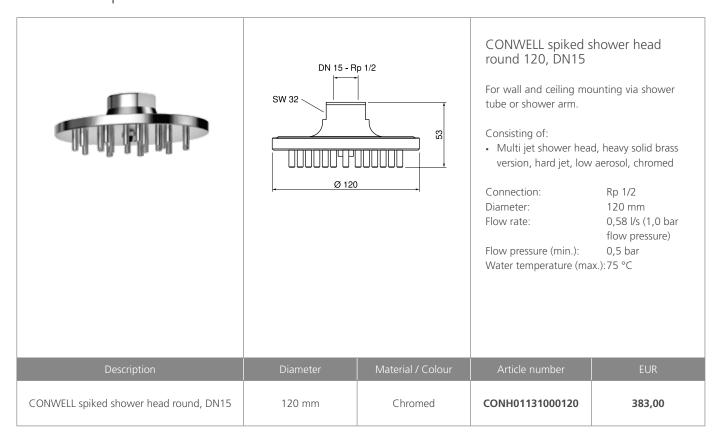

## CONWELL spray shower head







# CONWELL spray shower head, DN15

## Consisting of:

 Spray shower head, heavy solid brass version, soft jet, with anti-lime nozzle, ball joint and rosette, for wall or panel mounting, chromed

Connection: G 1/2 B
Calculated flow rate: 0,25 l/s (1,0 bar flow pressure)


Flow pressure (min.): 1,0 bar Water temperature (max.): 75 °C Projection: 45 mm

Description	Nominal width	Material / Colour	Article number	EUR
CONWELL spray shower head	DN15	Chromed	CONH02130000000	110,00

## CONWELL jet shower head







# CONWELL jet shower head MINI, DN15

For ceiling mounting.

## Consisting of:

 Shower head, fixed, heavy solid brass version, with integrated flow rate controller, integrated swirl insert and lowmaintenance single jet ball nozzle, low aerosol, chromed

Connection: Rp 1/2 Flow rate: 0,15 l/s

(flow rate con-

troller)

Flow pressure (min.): 1,0 bar Water temperature (max.): 75 °C

Version with 0,1 l/s and 0,2 l/s flow rate controller available.

Description	Nominal width	Material / Colour	Article number	EUR
CONWELL jet shower head MINI	DN15	Chromed	CONH03130000001	95,00

## CONWELL ball-type nozzle



## CONWELL ball-type nozzle, DN15

For variable flow angles for jet shower heads GOLF, VESUV, CITY, MINI, MAXI.

Consisting of:


 1x ball nozzle holder made of black POM (visible by use in CITY, MINI and MAXI shower heads), with integrated swirl insert and a low-maintenance brass single-jet ball nozzle, chromed


Connection: G 1/2
Total lenght: 55 mm
Flow angle: ±11 Grad
Flow pressure (min.): 1,0 bar

Description	Nominal width	Material / Colour	Article number	EUR
CONWELL ball-type nozzle	DN15	Chromed	CONO091000	60,00

## CONHEAD waterfall shower head







# CONHEAD waterfall shower head, DN15


Consisting of:

 Heavy solid brass version, for wall mounting, with ball joint and rosette, low aerosol, chromed


Connection: G 1/2 B
Flow rate: 0,66 l/s (1,0 bar)
Flow pressure (min.): 0,5 bar
Water temperature (max.): 75 °C
Projection: 150 mm

Description	Nominal width	Material / Colour	Article number	EUR
CONHEAD waterfall shower head	DN15	Chromed	CONO070000	401,00


## Shower arm

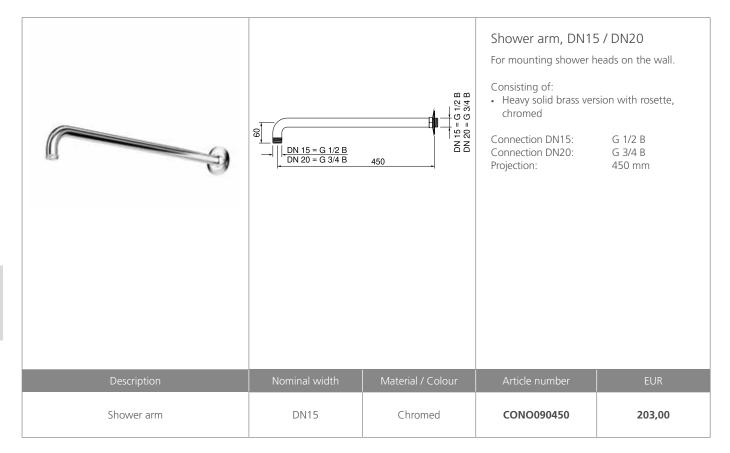

## Shower arm with holder

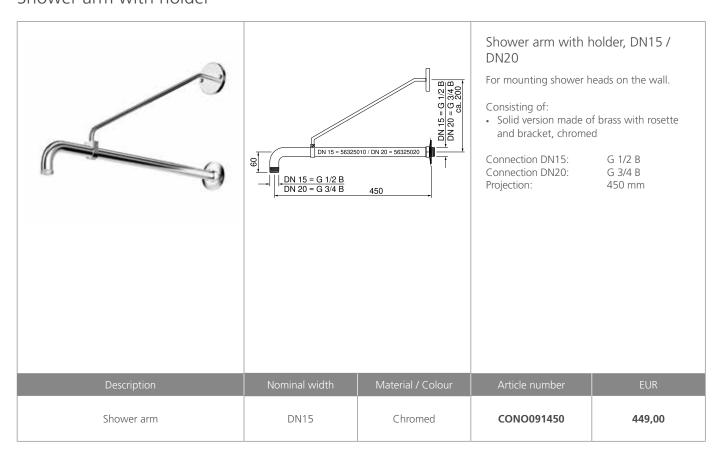


## Ceiling shower arm

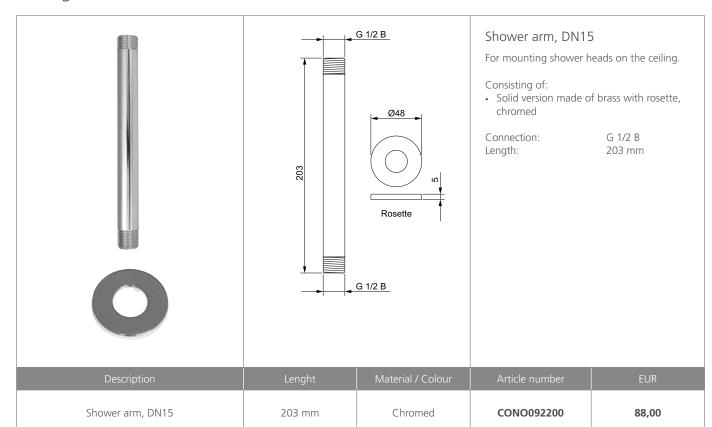


806,00

## CONWELL bucket shower for indoor areas

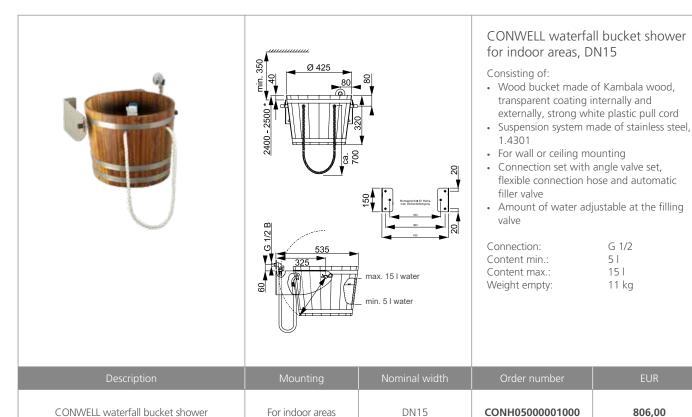

## CONWELL bucket shower for outdoor areas

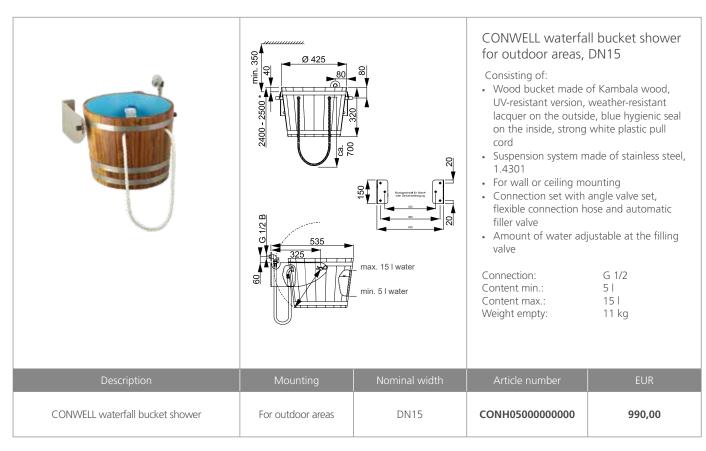



## CONWELL power shower set, with angle stop valve




## CONWELL power shower set, with angle stop valve, DN15

Hydrotherapy set for power showers with angle stop valve, white hose, hose length 1500 mm, for wall mounting.

#### Consisting of:

- 1 Angle stop valve with ceramic head and design handle, entirely made of brass, chromed
- 1 Special hose for power showers, colour white, 1500 mm long, with power shower nozzle made of plastic, white
- 1 Connection fitting, chromed, with integrated check valve
- 1 Hose holder made of plastic, chromed

Connection DN15: G 1/2 B Operating pressure (max.): 6,0 bar Flow rate 1 bar: 0,13 l/s Flow rate 3 bar: 0,36 l/s

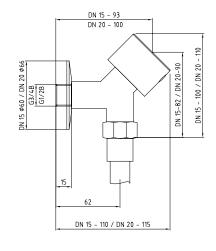

Description	Nominal width	Colour	Article number	EUR
CONWELL power shower set, with angle stop valve	DN15	White	CONH21136000000	456,00

## CONWELL power shower set, with ball connector




## CONWELL power shower set, with ball connector, DN150

Hydrotherapy set for power shower with wall elbow (ball shape), white hose, hose length 1500 mm, for wall mounting.

#### Consisting of:

- 1 Wall elbow, casing and rosette made of brass, chromed
- 1 Special hose for power showers, colour white, 1500 mm long, with power shower nozzle made of plastic, white
- 1 Connection fitting, chromed, with integrated check valve
- 1 Hose holder made of plastic, chromed

Connection DN15: G 1/2 B Operating pressure (max.): 6,0 bar Flow rate 1 bar: 0,13 l/s Flow rate 3 bar: 0,36 l/s

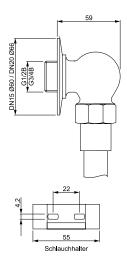

Description	Nominal width	Colour	Article number	EUR
CONWELL power shower set, with ball connector	DN15	White	CONH21137000000	456,00

## CONWELL shower set for Kneipp's affusions, with angle stop valve




CONWELL shower set for Kneipp's affusions, with angle stop valve, DN15

Hydrotherapy set for Kneipp's affusions with angle stop valve, white hose, for wall mounting.

#### Consisting of:

- 1 Angle stop valve with ceramic head and design handle, entirely made of brass, chromed
- 1 Special hose for Kneipp's affusions, colour white
- 1 Connection fitting, chromed, with integrated check valve
- 1 Hose holder made of plastic, chromed

Connection DN15: G 1/2 B Operating pressure (max.): 6,0 bar Flow rate 1 bar: 0,13 l/s Flow rate 3 bar: 0,36 l/s

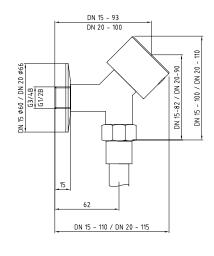

Description	Nominal width	Colour	Article number	EUR
CONWELL shower set for Kneipp affusions, with angle stop valve, 1500 mm	DN15	White	CONH22136000150	346,00
CONWELL shower set for Kneipp affusions, with angle stop valve, 2400 mm	DN15	White	CONH22136000240	387,00

# CONWELL shower set for Kneipp's affusions, with ball connector




#### CONWELL shower set for Kneipp's affusions, with ball connector, DN15

Hydrotherapy set for Kneipp's affusions with wall elbow (ball shape), white hose, for wall mounting.

#### Consisting of:

- 1 Wall elbow, casing and rosette made of brass, chromed
- 1 Special hose for Kneipp's affusions, colour white
- 1 Connection fitting, chromed, with integrated check valve
- 1 Hose holder made of plastic, chromed

Connection DN15: G 1/2 B Operating pressure (max.): 6,0 bar Flow rate 1 bar: 0,13 l/s Flow rate 3 bar: 0,36 l/s

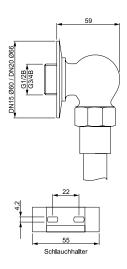

Description	Nominal width	Colour	Article number	EUR
CONWELL shower set for Kneipp affusions, with ball connector, 1500 mm	DN15	White	CONH22137000150	346,00
CONWELL shower set for Kneipp affusions, with ball connector, 2400 mm	DN15	White	CONH22137000240	372,00





# CONTHERM thermostat battery AV



#### CONTHERM thermostat battery AV, exposed, DN15 – DN50

Thermostat battery with scalding protection, for providing hot water at a constant temperature, for wall mounting, with fittings.

#### Consisting of:


- 1 Thermostatic battery, red brass body, working part designed as a cartridge system on bi-metal basis with pressure compensation system for higher temperature stability, with temperature selector for fixed or limited settings and degree scale, 30-70 °C (blue handle), with backflow preventer and sieves, chrome plated
- 3 Fittings (AV), chrome plated


Connections: DN15 DN20 DN25 DN32 DN40 DN50 R 1/2 R 3/4 R 1 R 1 1/4 R 1 1/2 R 2 Flow rate: 0,46 l/s 1,33 l/s 2,00 l/s 2,91 l/s 4,33 l/s 6,67 l/s

Operating pressure max: 6,0 bar

Pressure difference: TWW to TW max. 1,5 bar

Max. TWW: 85 °C Min. TWW: TWM + 5 K





ĺ	DN	А	В	С	D	Е	F	G	Н
	15	103	177	52	89	100	17,5	R 1/2	
	20	117	197	82	122	93	18	R 3/4	G 3/4 B
	25	133	223	94,5	139,5	101	23	R 1	G 3/4
	32	176	306	111,5	176,5	116	24	R 11/4	G 3/8
	40	217	241	134	196	127	32	R 11/2	G 3/8

Nominal width	Connection	Temperature setting range	Article number	EUR
DN15	R 1/2	15-50 °C	CONM92604000015	1.069,00
DN20	R 3/4	30-70 °C	CONM92604000020	1.366,00
DN25	R 1	30-70 °C	CONM92604000025	1.677,00
DN32	R 1 1/4	30-70 °C	CONM92604000032	2.394,00
DN40	R 1 1/2	30-70 °C	CONM92604000040	3.375,00

# CONTHERM thermostat battery WAV



#### CONTHERM thermostat battery WAV, exposed, DN15 – DN25

Thermostat battery, with scalding protection, for providing hot water with a constant temperature, for wall mounting, with angle fittings.

#### Consisting of:


- 1 Thermostat battery, red brass body, working part designed as a cartridge system on bi-metal basis with pressure compensation system for higher temperature stability, with temperature selector for fixed or limited settings and degree scale, 30-70 °C (blue handle), with backflow preventer and sieves, chrome plated
- 3 Angle fittings (WAV), inlets fitted with stop valves, chrome plated


Connections: DN15 DN20 DN25 R 1/2 R 3/4 R 1 Flow rate: 0,46 l/s 1,33 l/s 2,00 l/s

Operating pressure max: 6,0 bar

Pressure difference: TWW zu TW max. 1,5 bar

Max. TWW: 85 °C Max. TWW: TWM + 5 K





DN	А	В	С	D	Е	F	G	_	J	K
15	103	157 ± 20	52	96	Ø 70	115	R 1/2	25	65	45
20	117	270 ± 5	82	124	Ø 70	118	R 3/4	30	68	45
25	133	300 ± 5	94,5	159,5	Ø 70	128	R 1	30	78	50

Nominal width	Connection	Temperature setting range	Article number	EUR
DN15	R 1/2	15-50 °C	CONM92604001015	1.164,00
DN20	R 3/4	30-70 °C	CONM92604001020	2.071,00
DN25	R 1	30-70 °C	CONM92604001025	2.711,00

# CONTHERM thermostatic mixing valve



#### CONTHERM thermostatic mixing valve, DN15, with connection set

- For mounting under the table
- For connection to hot and cold water
- Intrinsically safe
- Anti-scalding protection
- Safety stop and "Legionella handle" for easy manual thermal disinfection
- Housing and temperature adjustment handle made of brass, chromed
- With integrated backflow preventer

Thermostatic mixing valve with connection set consisting of:

- 1 Thermostat battery
- 1 Connection set for mounting on existing angle valves


Thermostatic mixing valve without connection set consisting of:

• 1 Thermostat battery

Operating pressure: 5,0 bar

Flow rate: 12 l/min / 3,2 gpm (1 bar)

Water temperature (max.): 75 °C
Temperature range: 30-70 °C
Connection entry: G 3/8 B
Connection drain: G 3/8



Description	Version	Nominal width	Article number	EUR
CONTHERM thermostatic mixing valve	With connection set	DN15	CONM91640000000	235,00

# CONTHERM thermostatic mixing valve




#### CONTHERM thermostatic mixing valve, DN15, without connection set

- For mounting under the table
- For connection to hot and cold water
- Intrinsically safe
- Anti-scalding protection
- Safety stop and "Legionella handle" for easy manual thermal disinfection
- Housing and temperature adjustment handle made of brass, chromed
- With integrated backflow preventer

#### Consisting of:

1 Thermostat-battery

Operating pressure: 5,0 bar
Flow rate: 0,2 l/s (1 bar)
Water temperature (max.): 75 °C
Temperature setting range: 30-70 °C
Inlet connection: G 3/8 B
Outlet connection: G 3/8



Description	Version	Nominal width	Article number	EUR
CONTHERM thermostatic mixing valve	Without connection set	DN15	CONM91640001000	191,00









# Functional options for faucets

Overview lavatory and wall-mounted faucets (not all features combinable)












	FUNCTIONAL	. Characteri	STICS							
		Water flow	/ actuation		Re	source-sav	ing functio	ns		
Faucets	Self-closing elect	g function, ronic	Self-closing function, mechanical	Mechanical	a	units: ate				
	IR sensor	Piezo switch	Water- hydraulics	Single-lever	Adjustable water flow time	Optional valve units: reduced flow rate	Solar module	Turbine		
LAVATORY FAUC	CETS									
Senso	•									
ultra	•				•	•	•	•		
lino	•				•		•			
lumino	•				•					
lumino+	•				•					
iQ	•				•					
loopino	•				•					
maxx	•				•					
umaxx	•				•					
tipolino		•			•					
CONWASH			•		•					
CONMED				•						
CONCEALED WA	ALL-MOUNTED	) FAUCETS								
CONGENIAL FIT	•	•			•					
ultra	•				•	•	•			
lino WV	•				•					
iQ	•				•					
EXPOSED WALL-	-MOUNTED FA	UCETS								
lino K	•				•					
lino W	•				•					
CONWASH			•		•					
CONMED				•						
CONBASE	•				•					

	Service functions										Hygiene and safety functions								
Temporary-off- cleaning stop	Continuous-on- filling mode	TwistStop: shut-off valve in the faucet	Self-adapting sensor sensitivity	Function key Click	Function key Click-Plus	Function key Touch	Thermostatic mixing	VARIOconnect	Service APP	Touchless operation	Hygienic flush	Adjustable hot water limitation	Display/indicator water temperature	Combination with instant water heater	Manual thermal hygienic flush with thermostatic mixer (thermal disinfection)	Electronic thermal hygienic flush CNX (thermal disinfection)	Cold flush	Anti-scalding	CNX Water Management System & Service APP
•	•	•	•			•		•	•	•	•	•	•	•*	•				•
•	•	•	•			•		•	•	•	•	•	•	•*	•				•
•	•		•	•	•		▼2)	•	•	•	•	•		•*	•	<b>\$</b> 3)	<b>2</b> 2)	<b>2</b> 2)	•
•	•		•	•	•				•	•	•	•		•*	•				•
•	•		•	•	•			•	•	•	•	•		•*	•				•
•	•		•	•	•			•	•	•	•	•		•*	•				•
•	•		•			•		•	•	•	•	•		•*	•				•
•	•		•			•		•	•	•	•				•				
o <sup>1)</sup>								•	•		•			•*	•				
															•				
															•				
o <sup>1)</sup>		•	•						•	•	•					•			•
•	•		•			•		•	•	•	•								\$4)
•	•		•	•	•			•	•	•	•								•
•	•		•	•	•			•		•	•								\$4⟩
•	•		•	•	•				•	•	•								\$4)
•	•		•			•				•	•								\$4)
•	•		•	•					•	•	•								•
	•		_	_					•	_									

<sup>•</sup> standard feature | • \* feature possible | o¹ if integrated into CNX |  $\nabla$ 2: lino AS | • 3 lino PRIMUS upright faucet | \$4 Service APP, only possible in conjunction with BLE Converter

# ultra lavatory faucet GS20 PUBLIC



Touchless, electronically controlled lavatory faucet:

- Modular single-piece design, without separate installation box, sturdy metal housing, chromed
- Dual infrared sensor with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Cold water supply connection with flexible high-pressure hose
- · Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- External battery box
- · Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

0,3-10 bar Operating pressure:

Approx. 6 l/min (3 bar) Flow rate:

Water temperature (max.): 80 °C

Aerator RC Aerator: Flexible hose: 350 mm Angle valve connection: G 3/8 Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

1 s pre-set (adjustable with Touch 0-10 s) Follow-up time: Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed) DIN EN 200; **C€** Engineering standards:

Optional: Valve unit with multi laminar spray head 2 l/min

(see accessories)


Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered







Power supply	Drain assembly	Colour	Article number	EUR
Battery e	Without	Chromed	161.040.11	409,00
Mains operation	Without	Chromed	161.050.11	431,00
VARIOconnect	Without	Chromed	161.056.11	396,00

# ultra lavatory faucet GS10 PUBLIC

# ultra lavatory faucet GS10 PUBLIC, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design, without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Hot and cold water supply connection with flexible high-pressure hoses
- · Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- · TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter
- (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- · External battery box
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions



VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hoses: 350 mm
Angle valve connection: G 3/8

Continuous water flow

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; C€

**Optional:** Valve unit with multi laminar spray head 2 l/min

(see accessories)


**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered








Power supply		Drain assembly	Colour	Article number	EUR
Battery	eco	Without	Chromed	161.000.11	443,00
Mains operation	eco	Without	Chromed	161.010.11	463,00
♥ VARIOconnect	ecco	Without	Chromed	161.016.11	428,00

# ultra lavatory faucet GM20 PUBLIC







ultra lavatory faucet GM20 PUBLIC, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Cold water supply connection with flexible hose
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- Automatic energy saving function (solar)
- 12 or 24-hour hygienic flush activatable with Touch
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries

(support batteries) commercial; life time up to 8 years

Turbine: Integrated turbine in combination with 4x1,5 V Alkaline AA batteries

(support batteries) commercial; life-time up to 8 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hose: 350 mm
Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

**Optional:** Valve unit with multi laminar spray head 2 l/min

(see accessories)

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

Power supply		Drain assembly	Colour	Article number	EUR
Battery	€	Without	Chromed	162.040.11	503,00
Mains operation	€°	Without	Chromed	162.050.11	522,00
○ VARIOconnect	€°	Without	Chromed	162.056.11	488,00
-X- Solar	Ç	Without	Chromed	162.048.11	548,00
Turbine	€0	Without	Chromed	162.078.11	579,00


# ultra lavatory faucet GM10 PUBLIC











#### ultra lavatory faucet GM10 PUBLIC, with IR sensor, with temperaturemixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
  TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- Automatic energy saving function (solar)
- 12 or 24-hour hygienic flush activatable with Touch
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years

Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries Solar:

(support batteries) commercial; life time up to 8 years

Integrated turbine in combination with 4x1,5 V Alkaline AA batteries Turbine:

(support batteries) commercial; life-time up to 8 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

For single and multiple power supply and data connection VARIOconnect: (Connection CNX and Service APP - see accessories)

Operating pressure: 0 3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C Aerator: Aerator RC Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed) DIN EN 200; **C€** Engineering standards:

Optional: Valve unit with multi laminar spray head 2 l/min

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered

Power supply	Drain assembly	Colour	Article number	EUR
Patton.	Without	Chromed	162.000.11	538,00
Battery	With	Chromed	162.001.11	557,00
Mains	Without	Chromed	162.010.11	554,00
operation	With	Chromed	162.011.11	577,00
VARIOconnect ©	Without	Chromed	162.016.11	520,00
VANOCOMMECT	With	Chromed	162.017.11	543,00
-Ö- Solar	Without	Chromed	162.008.11	580,00
Solar	With	Chromed	162.009.11	603,00
<b>S</b> Turbine	Without	Chromed	162.068.11	626,00
Turbine	With	Chromed	162.069.11	647,00

# ultra lavatory faucet GM10 EXPERT







# ultra lavatory faucet GM10 EXPERT, with IR sensor, with temperature-mixing, solar, chromed

Touchless, electronically controlled lavatory faucet:

- Continuous water flow via integrated piezo button
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- LCD display: shows the temperature and water flow time
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Hot and cold water supply connection with flexible high-pressure hoses
- · Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- · Automatic energy saving function (solar) and safety shutdown
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries

(support batteries) commercial; life time up to 8 years

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 I/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hoses: 350 mm
Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

**Optional:** Valve unit with multi laminar spray head 2 l/min

(see accessories)

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered

	Power supp	oly	Drain assembly	Colour	Article number	EUR
	- Solar •€	~0	Without	Chrom	162.108.11	785,00
		~		Chrom	162.109.11	805,00

# ultra lavatory faucet GH10 PUBLIC







#### ultra lavatory faucet GH10 PUBLIC, with IR sensor, with temperaturemixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- Automatic energy saving function (solar)
- 12 or 24-hour hygienic flush activatable with Touch
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

4x1,5 V Alkaline AA batteries; life time up to 4 years Battery:

Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries Solar: (support batteries) commercial; life time up to 8 years

Turbine: Integrated turbine in combination with 4x1,5 V Alkaline AA batteries (support batteries) commercial; life-time up to 8 years

Plug-in transformer 110-240 V 50-60 Hz / 6 V Mains supply: VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0 3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C Aerator: Aerator RC 350 mm Flexible hoses: Angle valve connection: G 3/8 Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology 1 s pre-set (adjustable with Touch 0-10 s) Follow-up time: Continuous water flow

2 min pre-set (adjustable with Touch 0,5-20 min) and hygienic flush time:

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; **C€** 

Optional: Valve unit with multi laminar spray head 2 l/min

(see accessories)

When integrated into the CNX Water Management System, Note:

the CNX Converter 6 V must be ordered separately


When using the Service APP, the BLE Converter must be ordered

Powe	Power supply		Colour	Article number	EUR
Battery	v ©	Without	Chrom	163.000.11	591,00
Mains operat	ion ©	Without	Chrom	163.010.11	608,00
	connect ©	Without	Chrom	163.016.11	575,00
-X- Solar	€°	Without	Chrom	163.008.11	635,00
<b>S</b> Turbin	e ©	Without	Chrom	163.068.11	666,00

# ultra lavatory faucet GH10 EXPERT







# ultra lavatory faucet GH10 EXPERT, with IR sensor, with temperature-mixing, solar, chromed

Touchless, electronically controlled lavatory faucet:

- Continuous water flow via integrated piezo button
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- LCD display: shows the temperature and water flow time
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Hot and cold water supply connection with flexible high-pressure hose
- · Check valves and built-in filters
- Adjustable hot water limitation (mechanically)
- Scald protection adjustable (mechanical)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- · Automatic energy saving function (solar) and safety shutdown
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries

(support batteries) commercial; life time up to 8 years

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 I/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hoses: 350 mm
Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

Optional: Valve unit with multi laminar spray head 2 I/min

(see accessories)

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered

ı	Power supply		Drain assembly	Colour	Article number	EUR
		Ç	Without	Chrome	163.108.11	837,00

# ultra lavatory faucet GM20 PUBLIC







ultra lavatory faucet GM20 PUBLIC, with IR sensor, without temperature-mixing (for cold or premixed water), PVD

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, PVD
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- · Cold water supply connection with flexible hose
- · Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- Automatic energy saving function (solar)
- 12 or 24-hour hygienic flush activatable with Touch
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hose: 350 mm
Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time:

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

**Optional:** Valve unit with multi laminar spray head 2 l/min

(see accessories)

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

Power supply Drain assembly		Colour	Article number	EUR
		Brushed nickel	162.040.00	585,00
Battery ©	Without	Polished brass	162.040.22	585,00
		Brushed chrome	162.040.44	585,00
		Brushed nickel	162.056.00	571,00
VARIOconnect	Without	Polished brass	162.056.22	571,00
		Brushed chrome	162.056.44	571,00


# ultra lavatory faucet GM10 PUBLIC











# ultra lavatory faucet GM10 PUBLIC, with IR sensor, with temperature-mixing, PVD

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, PVD
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Hot and cold water supply connection with flexible high-pressure hoses
- · Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- Automatic energy saving function (solar)
- 12 or 24-hour hygienic flush activatable with Touch
- Integrated battery unit
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 4x1,5 V Alkaline AA batteries; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 I/min (3 bar)

Water temperature (max.): 80 °C
Aerator: Aerator RC
Flexible hoses: 350 mm
Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

**Optional:** Valve unit with multi laminar spray head 2 l/min

(see accessories)

**Note:** When integrated into the CNX Water Management System,


the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

Power supply Drain assembly		Colour	Article number	EUR
		Brushed nickel	162.000.00	627,00
Battery ©	Without	Polished brass	162.000.22	627,00
		Brushed chrome	162.000.44	627,00
		Brushed nickel	162.016.00	610,00
VARIOconnect	Without	Polished brass	162.016.22	610,00
		Brushed chrome	162.016.44	610,00

# Accessories for ultra lavatory faucets





#### Battery box for ultra GS

External battery box for ultra GS (suitable only for ultra GS!)

Description	Version	Article number	EUR
Battery box for ultra GS	Suitable only for ultra GS!	391.058.00	37,00



#### CONTI+ Spare parts list

CONTI+ spare parts list for shower- and washrooms for:

- Accessories and optional functions
- Exploded assembly drawings

 $https://conti.plus/fileadmin/conti.plus/world/downloads/SPARE-PARTS-Catalouge\_EN.pdf$ 




https://www.youtube.com/channel/UCMd3Te3wmkiuhkgG8GPaLQQ





# CONTI+ lino PRIMUS L40

# NEW: Technology plus safety

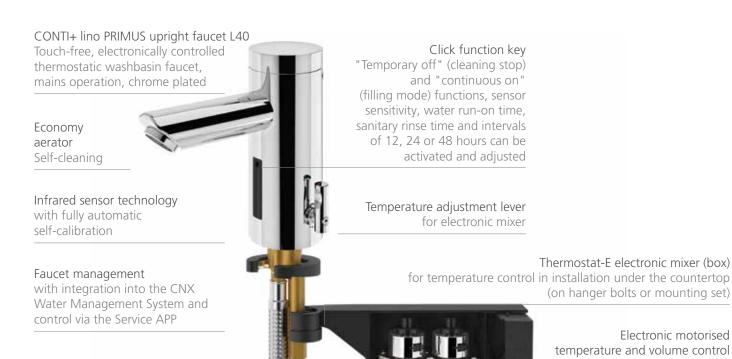

Electronic motorised temperature and volume control

Thermostat-E electronic mixer (box)


(on hanger bolts or mounting set)

Safety shutdown if the cold water supply fails (electronic anti-scalding protection based on DIN EN 1111)

#### Thermostat-E

Fully electronic mixer (free of dead space), enables separate cold water flushing, sanitary rinsing and thermal disinfection (hot water) with selectable target temperature

Hot water connection with flexible hose incl. strainers



















# lino PRIMUS upright faucet L40



lino PRIMUS upright faucet L40, with IR Sensor and electronic mixing unit Thermostat-E, with separate cold water flush, hygienic flush and thermal disinfection

Touchless electronically controlled thermostatic washbasin tap

- Infrared sensor system with fully automatic self-measurement
- Electronic mixing unit Thermostat-E for temperature control as under-table installation on hanger bolts or mounting set
- Temperature and volume regulating servomotors
- Electronic scald protection according to DIN EN 1111
- Separate cold, mixed and hot water Hygienic flushing via Service APP or integration in CNX Water Management System including documentation
- · Connection of cold and hot water, with flexible hoses incl. dirt strainer
- With function key Click short-off (cleaning stop) and continuous-on (filling mode), sensor sensitivity, economy jet regulator (self-cleaning)
- Control via service APP possible
- Integration into CNX Water Management System possible

Mains surface-mounted: plug-in power supply unit 230 V / 12 V

Operating pressure: 0.3-10 bar Flow rate (approx.) 3.8 l/min (3 bar)

Water temperature input (max.): 80 °C
Temperature limit (max.): 42 °C
Pressure hoses: 350 mm
Angle valve connections: G 3/8"

Dirt sieves: 0.5 mm mesh size

Water run-on time: 1 s preset, adjustable with function key 0-12 s permanent

on-running time and hygiene flushing running time: set,

with function key 0.5-20 min

Electronic scald protection: In case of cold water pipe malfunction, the water flow is

stopped when the temperature reaches 48  $^{\circ}$ C (factory setting - adjustable via service APP and CNX, pay attention

to maximum water temperature).

Cleaning stop: 2 min fixed


Standards: DIN EN 200, noise class I, P-IX 9575 / IA,CE


**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be

ordered separately.

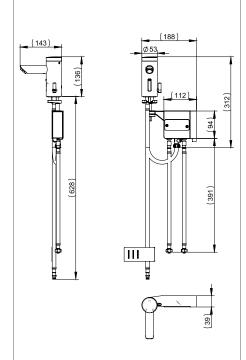





# lino AS lavatory faucet L13 with thermostatic anti-scalding


















#### lino AS lavatory faucet L13 with thermostatic anti-scalding

Touchless, electronically controlled lavatory faucet, IR sensors, chromed

- With automatic setting feature
- Thermostatic temperature adjusting
- Thermostatic anti-scalding function following standard EN 1111
- Hot and cold water supply connection with flexible high-pressure hoses, check valves and built-in filters.

Note: water supply hot/cold must be installed crosswise

- Reliable solenoid valve ROBUST
- Economic aerator CASCADE self-cleaning
- With function key Click for adjusting temporary-off (cleaning) and continuous water flow time (filling basin) sensor sensitivity, continuous water flow time and hygienic flush time, follow-up time, and 12-, 24- or 48-hour hygienic flush
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

#### Technical data:

6 V Lithium CRP2, life time up to 4 years Battery:

Mains surface-mounted: plug-in power supply unit

0,3-10 bar Operating pressure:

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Follow-up time: 1 s pre-set adjustable with function key 0-10 s

Continuous water flow

and hygienic flush time: 2 min pre-set adjustable with function key Click 0,5-20 min

Temporary-off:

Standards: DIN EN 200; Noise class I, P-IX 9575 / IA, C€

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

L .
-----


Version

Function key Click

Stromversorgung Drain as		Drain assembly	Colour	Article number	EUR
Batt	ery	Without	Chrome	CONE8150208100	710,00
( Main	ns o	Without	Chrome	CONE8150208200	742,00









# lino lavatory faucet L20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Cold water supply connection with flexible hose, built-in filter
- · Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries)

commercial - life-time up to 6 years

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixe

Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; €€

**Optional:** Extension kit for countertop basins (see accessories)

**Note:** When integrated into the CNX Water Management System,


the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

Versions		Function key Click-plus		Function key Click	
Power supply	Drain assembly	Article number	EUR	Article number	EUR
Battery	Without	120.140.11	504,00	120.040.11	492,00
Mains operation	Without	120.150.11	535,00	120.050.11	520,00
VARIOconnect	Without	120.156.11	492,00	120.056.11	478,00
−Ò Solar	Without	120.148.11	538,00	120.048.11	522,00







#### lino lavatory faucet L10, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design, without separate installation box, sturdy brass housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucets
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Recessed function key - without additional functions Click:

Protruding function key Click-plus (continuous-on, temporary-off) Click-plus: Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years

Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries)

commercial - life-time up to 6 years

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

0,5 mm mesh size Built-in filters:

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s) Continuous water flow

and hygienic flush time:

2 min pre-set (adjustable with function key 0,5-20 min) Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; C€

Optional: Extension kit for countertop basins (see accessories)

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered

Versions		Function key Click-plus		Function key Click		
	Stromversorgung	Drain assembly	Article number	EUR	Article number	EUR
	Datta	Without	120.100.11	540,00	120.000.11	525,00
	Battery	With	120.101.11	560,00	120.001.11	547,00
	Mains operation	Without	120.110.11	568,00	120.010.11	554,00
	operation	With	120.111.11	590,00	120.011.11	576,00
_0	\/A.BIO	Without	120.116.11	522,00	120.016.11	511,00
~	VARIOconnect With	With	120.117.11	547,00	120.017.11	535,00
$\sim$	Color	Without	120.108.11	568,00	120.008.11	554,00
-Ö- Sola	SUIdI	With	120.109.11	592,00	120.009.11	577,00









# lino lavatory faucet L20, with IR sensor, without temperature-mixing (for cold or premixed water), PVD

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, PVD
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Cold water supply connection with flexible hose, built-in filter
- Continuous water flow time and hygienic flush time adjustable with function key
- · Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate: Approx. 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow and hygienic flush time

2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; €€

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered  $\,$ 

Version			Fui	nction key Click
Stromversorgung	Drain assembly	Colour	Article number	EUR
		Brushed nickel	120.040.01	628,00
Battery	Without	Polished brass	120.040.22	628,00
		Brushed chrome	120.040.44	628,00
		Brushed nickel	120.056.00	560,00
VARIOconnect C	Without	Polished brass	120.056.22	560,00
		Brushed chrome	120.056.44	560,00









#### lino lavatory faucet L10, with IR sensor, with temperature-mixing, PVD

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design, without separate installation box, sturdy brass housing, PVD
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator

Compatible with CNX and Service APP: control of stored operational data, settings and

- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucets
- control functions

Click: Recessed function key - without additional functions 6 V Lithium CRP2 - commercial; life time up to 4 years Battery: Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0.5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s) Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min) Temporary-off:

2 min (fixed) DIN EN 200; Noise class I; P-IX 9575 / IA; C€


Engineering standards:

When integrated into the CNX Water Management System, Note: the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

Version		Function key Click		nction key Click
Stromversorgung	Drain assembly	Colour	Article number	EUR
Battery	Without	Brushed nickel	120.000.01	662,00
		Polished brass	120.000.22	662,00
		Brushed chrome	120.000.44	662,00
		Brushed nickel	120.016.00	603,00
	Without	Polished brass	120.016.22	603,00
		Brushed chrome	120.016.44	603,00





Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Cold water supply connection for decentralized water treatment (boiler)
- With flexible high-pressure hoses, flow limiters and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions



Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Photovoltaic cells with 6 V Lithium CRP2 (support batteries) Solar:

commercial life-time up to 6 years

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0 3-10 bar

5 l/min / 1,3 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator: Flow Straightener, FS Dripless Flexible hoses: 2x500 mm / 1x350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)


2 min (fixed) Temporary-off:

DIN EN 200; Noise class I; P-IX 9575 / IA; C€ Engineering standards:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

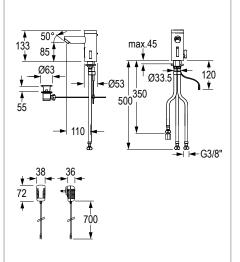



Version		Function key Click-plus		Function key Click		
	Power supply	Drain assembly	Article number	EUR	Article number	EUR
0	Patton	Without	120.120.11	599,00	120.020.11	583,00
Battery	Battery	With	120.121.11	620,00	120.021.11	606,00
Mains operation	Mains	Without	120.130.11	627,00	120.030.11	614,00
	operation	With	120.131.11	648,00	120.031.11	635,00
♥ VARIOconnect ♥	VARIOsannast 😞	Without	120.136.11	580,00	120.036.11	568,00
	VARIOCONNECT	With	120.137.11	604,00	120.037.11	592,00
−X− Solar	Color	Without	120.128.11	628,00	120.028.11	616,00
	SUIdI	With	120.129.11	652,00	120.029.11	638,00

# lumino lavatory faucet L10i









lumino lavatory faucet L10i, with IR sensor, with temperature-mixing, with temperature indication via LED light ring, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temperature indication via LED light ring
- The colour gradient of the light ring is switchable (red-white-blue or red-violet-blue)
- Ambient illuminating (permanent white light during stand-by) activatable, adjustable luminosity
- calibration of the colour position is adjustable when scald protection is on
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Recessed function key - without additional functions Click:

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Approx. 6,5 l/min / 1,7 gpm (3 bar) Flow rate:

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: Angle valve connection: G 3/8

0,5 mm mesh size Built-in filters:

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time 2 min pre-set (adjustable with function key 0,5-20 min)

2 min (fixed)

Temporary-off: Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; C€

Optional: Extension kit for countertop basins (see accessories)

When integrated into the CNX Water Management System, Note:

> the CNX Converter 6 V must be ordered separately. When using the Service APP, the BLE Converter must be ordered

Version		Function key Click-plus		Function key Click	
Power supply	Drain assembly	Article number	EUR	Article number	EUR
Mains	Without	121.110.11	653,00	121.010.11	640,00
Mains operation	With	121.111.11	674,00	121.011.11	661,00

# lumino+ lavatory faucet L10c



















lumino+ lavatory faucet L10c, with IR sensor, with electronic instant water heater, with temperature indication via LED light ring, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- · Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- · Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Installation similar to conventional single-level faucet
- Compatible with Service APP: control of stored operational data, settings and control functions

Small size electronic instant water heater:

- Compression proofed construction
- · Water supply connection with flexible hose
- Effective bare wire heating system IES®
- Temperature control above lumino lavatory faucet
- Flow rate can be preset inside the unit (38°C pre-set)
- Power rating: MBX3i: 3,5kW (230 V/AC) or MBX7i: 6,5kW (400 V/AC)

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Mains supply faucet: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Mains supply MBX3i: Safety plug 230 V/AC, 3x1,5 mm2, 15 A, 3,5 kw 2 plug-ins


required, optional accessory double socket

Mains supply MBX7i: 2 Phases fixed connection 400 V/AC, 3x2,5 mm², 16 A, 6,5 kW

**Note:** When using the Service APP, the BLE Converter must be ordered

Version		Function key Click-plus		Function key Click			
	Power supply		Drain assembly	Article number	EUR	Article number	EUR
Mains supply Clage MBX3i	0	Without	121.128.11	906,00	121.028.11	894,00	
		With	121.129.11	930,00	121.029.11	916,00	
Mains supply Clage MBX7i	<b>€</b> 8	Without	121.138.11	924,00	121.038.11	909,00	
		With	121.139.11	945,00	121.039.11	933,00	

### lumino+ lavatory faucet L10c, with IR sensor, with electronic instant water heater

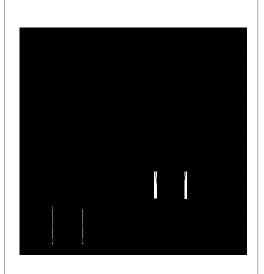

Technical data of lumino lavatory faucet:

Operating pressure: 0,3-10 bar

MBX3i approx. 2 l/min / 0,5 gpm Flow rate: MBX7i approx. 3,7 l/min / 1 gpm

Max. water temperature.: Aerator:

MBX3i spray-head-aerator MBX7i economic aerator

350 mm Flexible hoses: Angle valve connection: G 3/8

Filters: 0,5 mm mesh size


automatic self-adapting sensor technology Sensor sensitivity: 1 s pre-set (adjustable with 0-10 s) Follow-up time:

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with 0,5-20 min)

2 min (fixed): Temporary-off:

DIN EN 200; Noise class I; P-IX 9575 / IA; C€ Engineering standards:

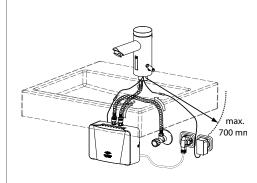

Technical data of electronic instant water heater MBX3i:

Operating pressure: 1-5 bar 230 VAC Rated voltage: Power rating: 3.5 kW Rated current: 15 A Cable size: 1.5 mm<sup>2</sup> Connecting hoses: 1x500 mm Hose connections: G 3/8 Inlet temperature: max. 60 °C

Protection type/class


IP24 Engineering standards:

Max. temperature increase at power rating and flow rate:

2,0 l/min / 0,5 gpm 25 K 2,5 l/min / 0,7 gpm 20 K 3,0 l/min / 0,8 gpm 17 K 3,5 l/min / 0,9 gpm 14 K

Temperature increase (Kelvin) + incoming cold water temperature (°C) = max. hot

water temperature

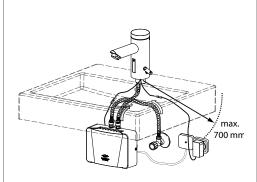

Technical data of electronic instant water heater MBX7i:

1-5 bar Operating pressure: Rated voltage: 400 VAC 6.5 kW Power rating: Rated current: 15 A Cable size: 2.5 mm<sup>2</sup> 1x500 mm Connecting hoses: Hose connections: G 3/8 Inlet temperature: max. 60 °C

Protection type/class

IP24 Engineering standards:  $\in$ 

Max. temperature increase at power rating and flow rate:

2,0 l/min / 0,5 gpm 46 K 2,5 l/min / 0,7 gpm 37 K 3,0 l/min / 0,8 gpm 31 K 3,5 l/min / 0,9 gpm 26 K

Temperature increase (Kelvin) + incoming cold water temperature (°C) = max. hot


water temperature

Installation example MBX7i

Installation example MBX3i



# Accessories lino lavatory faucets

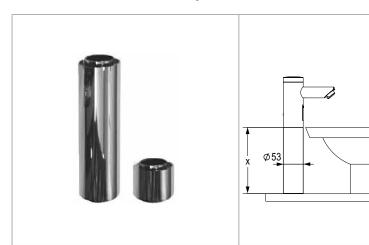

# Faucet extension for lino lavatory faucets

Extension suitable for L10, L13, L20, L10i

- One-piece design without concealed parts
- Sturdy brass, chromed

Set consisting of:

- Extension
- · Threaded rod
- Connection hoses and filters

Only for faucets without drain assembly!

Description	Length (x)	Colour	Article number	EUR
Fausat autonoian line	177 mm	Chromed	550.034.11	97,00
Faucet extension lino	56 mm	Chromed	550.034.12	85,00




### iQ lavatory faucet A20









### iQ lavatory faucet A20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Cold water supply connection with flexible hose and built-in filter
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Battery: 6 V Lithium 2 CR5 - commercial; life time up to 4 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V VARIOconnect: For single and multiple power supply and data connection

(Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

6 l/min / 1,6 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm G 3/8 Angle valve connection:

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology 1 s pre-set (adjustable with function key 0-10 s) Follow-up time:

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

DIN EN 200; Noise class I; P-IX 9576 / IA; C€ Engineering standards:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered


separately.

	Version		Funct	ion key Click-plus	Fui	nction key Click
	Power supply	Drain assembly	Article number	EUR	Article number	EUR
	Battery	Without	100.140.11	472,00	100.040.11	461,00
	Mains operation	Without	100.150.11	502,00	100.050.11	490,00
ec e	VARIOconnect ©	Without	100.156.11	459,00	100.056.11	445,00

### iQ lavatory faucet A10





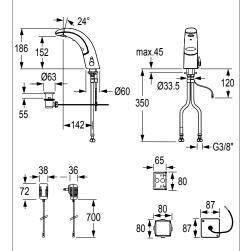

### iQ lavatory faucet A10, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Battery: 6 V Lithium 2 CR5 - commercial; life time up to 4 years Plug-in transformer 110-240 V 50-60 Hz / 6 V Mains supply:

Concealed mains supply: flush-mounted power supply 110-240 V 50-60 Hz / 6 V including box

VARIOconnect: For single and multiple power supply and data connection

(Connection CNX and Service APP - see accessories)

Operating pressure: 0.3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s) Continuous water flow

and hygienic flush time:

2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

DIN EN 200; Noise class I; P-IX 9576 / IA; C€ Engineering standards:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered

Version			Function key Click-plus		Function key Click	
	Power supply	Drain assembly	Article number	EUR	Article number	EUR
0	Datton	Without	100.100.11	515,00	100.000.11	502,00
	Battery	With	100.101.11	536,00	100.001.11	526,00
	Mains operation	Without	100.110.11	545,00	100.010.11	531,00
		With	100.111.11	564,00	100.011.11	553,00
000	VARIOconnect	Without	100.116.11	501,00	100.016.11	489,00
	VARIOCOTITIECT 4	With	100.117.11	525,00	100.017.11	510,00
	Concealed mains	Without	100.160.11	551,00	100.060.11	536,00
	mains power supply	With	100.161.11	572,00	100.061.11	559,00

### iQ lavatory faucet A30





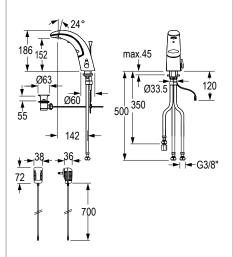

# iQ lavatory faucet A30, with IR sensor, low pressure (for open water heater), with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator, cascade
- Cold water supply connection and decentralized water treatment (boiler)
- With flexible high-pressure hoses, flow limiters and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- · Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Battery: 6 V Lithium 2 CR5 - commercial; life time up to 4 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 5 l/min / 1,3 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Flow Straightener, FS Dripless Flexible hoses: 2x500 mm / 1x350 mm

Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; P-IX 9576 / IA; €€

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

Versions			Funct	ion key Click-plus	Fur	nction key Click
Power supply [		Drain assembly	Article number	EUR	Article number	EUR
0	Dattan	Without	100.120.11	591,00	100.020.11	577,00
	Battery	With	100.121.11	614,00	100.021.11	600,00
	Mains	Without	100.130.11	620,00	100.030.11	606,00
	Mains operation	With	100.131.11	643,00	100.031.11	628,00
_0	VARIOconnect ©	Without	100.136.11	575,00	100.036.11	562,00
	VARIOCOTTIECT 0	With	100.137.11	599,00	100.037.11	583,00





### Senso lavatory faucet



Senso lavatory faucet, with IR sensor, with electronic mixing, with temperature indication via light-beam, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design with small external mixer unit on angle valve
- · Housing made of brass, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- · Cold water supply connection with flexible high-pressure hose
- Adjustable temperature
- · Comfort water-saving by sensitive raindrop-aerator
- · Light use through mature LED technology
- Illumination of the water jet in white
- Electronically Touch function easy change of the temperature by touching the button
- Temperature indication through lighted display bar (red, white, blue)
- Changes by touching the button
- Welcome-function (remote detection), light elements flashes white
- Infrared sensors with automatic setting feature, microprocessor
- Follow-up time and sensor sensitivity adjustable
- Installation similar to conventional single-lever faucet

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Operating pressure: 0,3-10 bar

Flow rate (approx.): 2 l/min / 0,5 gpm 2-row jet piece (3 bar) (delivery status) Approx. 4 l/min / 0,5 gpm 3-row jet piece (3 bar)

Water temperature (max.): 80 °C

Aerator: Raindrop-aerator Flexible hoses: 350 mm Angle valve connection: G 3/8


Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

Follow-up time: 2 s pre-set (1-7 s adjustable)
Continuous water flow: 2 min pre-set (1-7 min adjustable)
Temporary-off: 2 min (1-7 min adjustable)

Engineering standards: DIN EN 200; €€












reddot design award honourable mention 2010

Power supply	Drain assembly	Colour	Article number	EUR
Mains supply	Without	Chrome	155.010.11	1.549,00

### loopino lavatory faucet G20



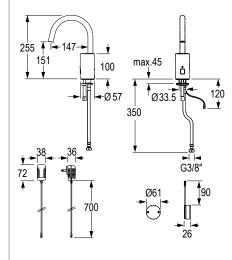

### loopino lavatory faucet G10, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Cold water supply connection with flexible hose, built-in filter
- Theft-proof battery box below the washbasin
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and con-

Click: Recessed function key - without additional functions Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

0,3-10 bar Operating pressure:

6 l/min / 1,6 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator CACHÉ Aerator: Flexible hose: 350 mm Angle valve connection: G 3/8 Built-in filter: 0,5 mm mesh size

Sensor sensitivity:

Automatic self-adapting sensor technology 1 s pre-set (adjustable with function key 0-10 s) Follow-up time:

Continuous water flow and hygienic flush time:

2 min pre-set (adjustable with function key 0,5-20 min) Temporary-off: 2 min (fixed)

DIN EN 200; **C€** Engineering standards:

When integrated into the CNX Water Management System, Note:

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.


Spout NOT swivelable

	Version				Fur	nction key Click
	Power supply		Drain assembly	Colour	Article number	EUR
0	Battery	eco	Without	Chrome	150.040.11	619,00
	Mains operation	eco	Without	Chrome	150.050.11	647,00
e C	VARIOconnect	ecco	Without	Chrome	150.056.11	603,00

### loopino lavatory faucet G10





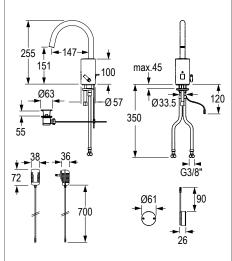

# loopino lavatory faucet G10, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible hoses
- · Check valves and built-in filters
- Theft-proof battery box below the washbasin
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- · Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, Temporary-off)

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Aerator CACHÉ Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-5 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed) Engineering standards: DIN EN 200; **C€** 

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

Spout NOT swivelable

Version				Funct	ion key Click-plus	Fur	nction key Click
	Power supply		Drain assembly	Article number	EUR	Article number	EUR
		Battery	Without			150.000.11	652,00
	Ballery		With	150.101.11	685,00		
	Mains operation	Without			150.010.11	678,00	
			With	150.111.11	716,00		
€0	VARIOconnect	¢°	Without			150.016.11	635,00

### loopino lavatory faucet G30














loopino lavatory faucet G30, with IR sensor, with temperature-mixing, low pressure (for open water heater), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Cold water supply connection for decentralized water treatment (boiler)
- · With flexible high-pressure hoses, flow limiters and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Theft-proof battery box below the washbasin
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions
Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years
Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Operating pressure: 0,3-10 bar

Flow rate (approx.): 5 l/min / 1,3 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Aerator CACHÉ
Flexible hoses: 2x500 mm / 1x350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)
Engineering standards: DIN EN 200; **C€** 

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered  $\,$ 

separately.

Spout NOT swivelable


Versions			Fur	nction key Click
Stromversorgung	Drain assembly	Colour	Article number	EUR
Battery C	Without	Chrome	150.020.11	710,00
Mains operation	Without	Chrome	150.030.11	738,00



### maxx lavatory faucet M20







# maxx lavatory faucet M20, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Integrated battery (maintenance via service cover)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Cold water supply connection with flexible hose and built-in filter
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time adjustable with Touch
- Follow-up time, sensor-sensitivity adjustable with Touch
- 12, 24 or 48-hour hygienic flush adjustable with Touch
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar;

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed); Engineering standards: DIN EN 200; **C€** 

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered


separately.

	Power supply	Drain assembly	Colour	Article number	EUR
	Battery	Without	Chrome	131.040.11	335,00
	Mains operation	Without	Chrome	131.050.11	364,00
e C	VARIOconnect	Without	Chrome	131.056.11	319,00

### maxx lavatory faucet M10







### maxx lavatory faucet M10, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Integrated battery (maintenance via service cover)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time adjustable with Touch
- Follow-up time, sensor-sensitivity adjustable with Touch
- 12, 24 or 48-hour hygienic flush adjustable with Touch
- Installation similar to conventional single-lever faucet
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

6 V Lithium CRP2 - commercial; life time up to 4 years Battery: Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

6 l/ min 1,6 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow and hygienic flush time:

2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed) DIN EN 200; **C€** Engineering standards:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

	Power supply	Drain assembly	Colour	Article number	EUR
	Battery	Without	Chrome	131.000.11	366,00
	Mains operation	Without	Chrome	131.010.11	396,00
€°	VARIOconnect ©	Without	Chrome	131.016.11	352,00

# Accessories for umaxx lavatory faucet



### Wall mounting kit for external valve unit

Set consisting of:

- 1 Wall bracket HU20
- 2 Screws
- 1 Armoured hose G 3/8
- 1 Twin connector cyl. OD 3/8
- Suitable for umaxx, ran

Description	Туре	Article number	EUR
umaxx wall mounting kit for external valve unit	Suitable for umaxx, ran	550.071.00	25,00

### umaxx lavatory faucet M21














umaxx lavatory faucet M21, with IR sensor, without temperature-mixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- · Sturdy metal housing, chromed
- Infrared sensors with automatic setting feature, microprocessor
- Small external hydraulic unit for direct mounting on the angle-stop valve or wall-mounted (optional) with reliable solenoid valve ROBUST (minimal level of water pressure surge) integrated waterproof battery box(in battery operated models only)
- Integrated water-resistant battery box, or cable connection for power supply
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time with Touch
- Follow-up time, sensor-sensitivity with Touch
- 12, 24 or 48-hour hygienic flush with Touch
- Compatible with Service APP and Service Monitor: control of stored operational data, settings and control functions

6 V Lithium CRP2 - commercial, life time up to 4 years Battery: Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection Service APP and Service Monitor - see accessories)

Operating pressure: 0,3-10 bar

3,5 l/min / 0,9 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator HONEYCOMB Aerator:

Flexible hose: 550 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

Follow-up time: 1 s pre-set (adjustable with Touch) Continuous water flow

and hygienic flush time:

2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed) DIN EN 200; **C€** Engineering standards:

Note: When using the Service APP, the BLE Converter must be ordered


separately.

	Power supply Drain assembly		Drain assembly	Colour	Article number	EUR
	Battery	&°	Without	Chrome	133.040.11	293,00
	Mains operation	8	Without	Chrome	133.050.11	322,00
e C	VARIOconnect	&	Without	Chrome	133.056.11	279,00

### tipolino self-closing lavatory faucet L25P







tipolino self-closing lavatory faucet L25P, with electronic start/stop button, without temperature-mixing (for cold or premixed water), chromed

Electronically controlled self-closing lavatory faucet with start/stop button:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Microprocessor electronics
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Economic aerator
- · Cold water supply connection with flexible high-pressure hose and built-in filter
- Installation similar to conventional single-lever faucet
- Follow-up time with start/stop button adjustable
- 12, 24, 48-hour hygienic flush with start/stop button activatable
- Mains supply: single- and multiple power supply
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial, life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Water flow time: 7 s pre-set (manually adjustable with button 2 s - 3 min)

Hygienic flush time: 30 sec. Engineering standards: DIN EN 200; **C€** 

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered  $\,$ 


separately.

	Power supply	Drain assembly	Colour	Colour Article number EUR							
	Battery	Without	Chrome	120.081.11	373,00						
	Mains operation	Without	Chrome	120.084.11	404,00						
€C	VARIOconnect	Without	Chrome	120.086.11	360,00						

### tipolino self-closing lavatory faucet L15P







tipolino self-closing lavatory faucet L15P, with electronic start/stop button, with temperature-mixing, chromed

Electronically controlled self-closing lavatory faucet with start/stop button:

- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Microprocessor electronics
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- · Economic aerator
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- Installation similar to conventional single-lever faucet
- Follow-up time with start/stop button adjustable
- Scald protection adjustable
- 12, 24, 48-hour hygienic flush activatable with start/stop button
- · Mains supply: single and multiple power supply
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial, life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

VARIOconnect: For single and multiple power supply and data connection

(Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Water flow time: 7 s pre-set (manuell adjustable with button 2 s - 3 min)

Hygienic flush time: 30 sec. Engineering standards: DIN EN 200; **C€** 

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

	Power supply	Drain assembly	Colour	Article number	EUR
	Battery	Without	Chrome	120.071.11	406,00
	Mains operation	Without	Chrome	120.074.11	436,00
£	VARIOconnect	Without	Chrome	120.076.11	393,00



### CONGENIAL FIT concealed wall-mounted faucet, rectangular, IR sensor, stainless steel





















CONGENIAL FIT concealed wall-mounted faucet, rectangular, with IR sensor, with thermostat, stainless steel - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with rectangular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valves in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via IR sensor, IR double sensor system, with automatic setting feature
- The water flow time is easily adjustable in electronic faucets

6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming via Click or the Service APP per shower.

#### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

#### Hygienic flush:

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function..

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### **CNX Water Management System:**

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, rectangular, IR sensor, stainless steel

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,1 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s
Water flow time factory setting: 30 s
Hygienic flush setting range: 2 min preset

(adjustable with click 0.5-20 min)

Electronic protection type: IP68

Dimensions (WxHxD): 170x225x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### **Optional accessories**

Retrofitting set electronic thermal disinfection

		HYG	CNX	TD <sub>E</sub>	<b>&gt;</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7116218100	1.198,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7116218200	1.306,00
CNX	30 V/DC power supply to CNX central operating unit	•	•		•	CONE7116218336	1.455,00
CIVA	(see chapter accessories)	•	•	•	•	CONE7116218360	1.525,00
Accessories	(see accessories	Sp	Spout 170 mm, chromed		ed	CONO820170	179,00
Acces	for CONGENIAL FIT)	Sp	oout 220 n	nm, chrom	ed	CONO820220	198,00

## CONGENIAL FIT concealed wall-mounted faucet, rectangular, IR sensor, chromed























### CONGENIAL FIT concealed wall-mounted faucet, rectangular, with IR sensor, with thermostat, chromed - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with rectangular cover plate
- Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. **EPDM** sealing rings
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valves in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via IR sensor, IR double sensor system, with automatic setting feature
- The water flow time is easily adjustable in electronic faucets

6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted Mains:

in installation box of for DIN top-hat rail mounting Mains (CNX):

Power supply over 30 V/DC power supply in the control panels 64 and 150

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming via Click or the Service APP per shower.

#### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

#### Hygienic flush:

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function..

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

#### Cleaning stop:

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### **CNX Water Management System:**

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, rectangular, IR sensor, chromed

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,1 l/s (flow rate regulator) Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)
Water flow time setting range: 3-180 s

Water flow time factory setting: 30 s Hygienic flush setting range: 2 min preset

(adjustable with click 0.5-20 min)

Electronic protection type: IP68

Dimensions (WxHxD): 225x170x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### **Optional accessories**

		HYG	CNX	TD <sub>E</sub>			
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•				CONE7156218100	1.198,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7156218200	1.306,00
CNX	30 V/DC power supply	•	•		•	CONE7156218336	1.455,00
CNX	to CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7156218360	1.525,00
sories	(see accessories	Spout 170 mm, chromed			ed	CONO820170	179,00
Accessories	for CONGENIAL FIT)	Sp	out 220 m	nm, chrom	ed	CONO820220	198,00



## CONGENIAL FIT concealed wall-mounted faucet, oval, IR sensor, stainless steel























CONGENIAL FIT concealed wall-mounted faucet, oval, with IR sensor, with thermostat, stainless steel - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valves in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via IR sensor, IR double sensor system, with automatic setting feature
- The water flow time is easily adjustable in electronic faucets

6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming via Click or the Service APP per shower.

#### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

#### Hygienic flush:

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function..

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### **CNX Water Management System:**

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, oval, IR sensor, stainless steel

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,1 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s
Water flow time factory setting: 30 s
Hygienic flush setting range: 2 min preset

(adjustable with click 0.5-20 min)

Electronic protection type: IP68

Dimensions (WxHxD): 280x180x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### **Optional accessories**

		HYG	CNX	[TD <sub>E</sub> ]	<b>**</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7117218100	1.220,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7117218200	1.328,00
CNX	30 V/DC power supply	•	•		•	CONE7117218336	1.478,00
CIVA	to CNX central operating unit (see chapter accessories)		•	•	•	CONE7117218360	1.549,00
sories	(see accessories	Sp	oout 170 n	nm, chrom	ed	CONO820170	179,00
(see accessories for CONGENIAL FIT)		Sp	oout 220 n	nm, chrom	ed	CONO820220	198,00



### CONGENIAL FIT concealed wall-mounted faucet, oval, IR sensor, chromed























CONGENIAL FIT concealed wall-mounted faucet, oval, with IR sensor, with thermostat, chromed - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Concealed shower final assembly kit with oval cover plate
- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- · Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valves in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via IR sensor, IR double sensor system, with automatic setting feature
- The water flow time is easily adjustable in electronic faucets

6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming via Click or the Service APP per shower.

#### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

#### Hygienic flush:

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function..

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### **CNX Water Management System:**

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, oval, IR sensor, chromed

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80  $^{\circ}\text{C}$ 

Flow rate DN15: 0,1 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s
Water flow time factory setting: 30 s
Hygienic flush setting range: 2 min preset

(adjustable with click 0.5-20 min)

Electronic protection type: IP68

Dimensions (WxHxD): 280x180x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### **Optional accessories**

		HYG	CNX	TD <sub>E</sub>			
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7157218100	1.220,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7157218200	1.328,00
CNX	30 V/DC power supply	•	•		•	CONE7157218336	1.478,00
CNX	to CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7157218360	1.549,00
sories	(see accessories	Sp	oout 170 n	nm, chrom	ed	CONO820170	179,00
Acces	(see accessories for CONGENIAL FIT)		oout 220 n	nm, chrom	ed	CONO820220	198,00



### CONGENIAL FIT concealed wall-mounted faucet, rectangular, piezo, stainless steel























### CONGENIAL FIT concealed wall-mounted faucet, rectangular, with piezo switch, with thermostat, stainless steel - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

Concealed shower final assembly kit with rectangular cover plate

- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- · Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional part can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

64 and 150

#### **Excecutive options:**

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming piezo button or the Service APP per shower.

### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

### **CNX Water Management System:**

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, rectangular, piezo, stainless steel

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80  $^{\circ}\text{C}$ 

Flow rate DN15: 0,1 l/s (flow rate regulator)

Flow rate during thermal

Hygienic flush factory setting:

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP 12 h after last water flow trigger,

30 s water flow time

Electronic protection type: IP68

Dimensions (WxHxD): 225x170x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### Optional accessories

		HYG	CNX	TD <sub>E</sub>			
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7116211100	933,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7116211200	1.039,00
CNX	30 V/DC power supply to CNX central operating unit	•	•		•	CONE7116211336	1.230,00
CIVA	(see chapter accessories)	•	•	•	•	CONE7116211360	1.326,00
sories	(see accessories for CONGENIAL FIT)		oout 170 m	nm, chrom	ed	CONO820170	179,00
Access			oout 220 m	nm, chrom	ed	CONO820220	198,00

### CONGENIAL FIT concealed wall-mounted faucet, rectangular, piezo, chromed

























### CONGENIAL FIT concealed wall-mounted faucet, rectangular, with piezo switch, with thermostat, chromed - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

Concealed shower final assembly kit with rectangular cover plate

- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- · Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional part can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

64 and 150

#### **Excecutive options:**

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming piezo button or the Service APP per shower.

### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

### CNX Water Management System:

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, rectangular, piezo, chromed

0,05 l/s (flow rate regulator)

12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush intervals can be set via Service APP

12 h after last water flow trigger,

30 s water flow time

225x170x10 mm

3-180 s

30 s

IP68

#### Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC Operating voltage (CNX): 30 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C 0,1 l/s (flow rate regulator)

Flow rate DN15:

Flow rate during thermal

disinfection DN15: Water flow time setting range:

Water flow time factory setting: Hygienic flush setting range:

Hygienic flush factory setting:

Electronic protection type:

Dimensions (WxHxD):

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### Optional accessories

		HYG	CNX	[TD <sub>E</sub> ]	<b>**</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7156211100	933,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7156211200	1.039,00
CNX	30 V/DC power supply	•	•		•	CONE7156211336	1.230,00
CIVA	to CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7156211360	1.326,00
sories	(see accessories for CONGENIAL FIT)		oout 170 m	nm, chrom	ed	CONO820170	179,00
Acces			oout 220 m	nm, chrom	ed	CONO820220	198,00



## CONGENIAL FIT concealed wall-mounted faucet, oval, piezo, stainless steel























CONGENIAL FIT concealed wall-mounted faucet, oval, with piezo switch, with thermostat, stainless steel - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

Concealed shower final assembly kit with oval cover plate

- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- · Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional part can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

64 and 150

#### **Excecutive options:**

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming piezo button or the Service APP per shower.

### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

### CNX Water Management System:

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, oval, piezo, stainless steel

#### Technical data:

Operating voltage (battery): 6 V/DC
Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C

Flow rate DN15: 0,1 l/s (flow rate regulator)

Flow rate during thermal

Hygienic flush factory setting:

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via setting on piezo switch, other hygienic flush

intervals can be set via Service APP 12 h after last water flow trigger,

30 s water flow time

Electronic protection type: IP68

Dimensions (WxHxD): 280x180x10 mm

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### Optional accessories

		HYG	CNX	[TD <sub>E</sub> ]	<b>\$66</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	6 V/DC Lithium battery waterproof encased	•				CONE7117211100	965,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7117211200	1.069,00
CNX	30 V/DC power supply	•	•		•	CONE7117211336	1.232,00
CIVX	to CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7117211360	1.356,00
sories	(see accessories	Spout 170 r		nm, chrom	ed	CONO820170	179,00
Acces	(see accessories for CONGENIAL FIT)		oout 220 n	nm, chrom	ed	CONO820220	198,00

### CONGENIAL FIT concealed wall-mounted faucet, oval, piezo, chromed























CONGENIAL FIT concealed wall-mounted faucet, oval, with piezo switch, with thermostat, chromed - final assembly kit

Final assembly kit for electronic lavatory faucet, device designed as concealed wall-mounted faucet in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

Concealed shower final assembly kit with oval cover plate

- · Concealed mounting, robust double lock, multi sealing system with drainage system for
- Cover plate: stainless steel 1.4301, all visible surfaces made of chromed stainless steel
- Support frame for cover plate: implementing functional elements and thermostat incl. EPDM
- Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- · Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional part can be disassembled from the front during maintenance work without removing the valve body
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Battery: 6 V Lithium waterproof encased, lifetime up to 4 years

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels

64 and 150

#### **Excecutive options:**

#### Hygienic flush (mains/battery):

Hygienic flush (electronic): the hygienic flush can be carried out in electronic faucets by programming piezo button or the Service APP per shower.

### Water flow time:

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, through the software parameter settings per faucet or faucet group.

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter setting per faucet group.

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

### CNX Water Management System:

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL FIT concealed wall-mounted faucet, oval, piezo, chromed

0,05 l/s (flow rate regulator)

intervals can be set via Service APP

12 h after last water flow trigger,

#### Technical data:

Operating voltage (battery): 6 V/DC Operating voltage (mains): 12 V/DC Operating voltage (CNX): 30 V/DC Operating pressure: 1,5-5,0 bar Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C 0,1 l/s (flow rate regulator)

Flow rate DN15:

Flow rate during thermal disinfection DN15:

Water flow time setting range:

3-180 s Water flow time factory setting: 30 s 12, 24 or 72 h, can be deactivated via

Hygienic flush setting range: setting on piezo switch, other hygienic flush

Hygienic flush factory setting:

30 s water flow time IP68 Electronic protection type: 280x180x10 mm

Dimensions (WxHxD):

#### Required accessories:

CONR5112 CONBOX FIT raw mounting set CONO820170 / CONO820220 Spout 170 / 220 mm\* CNX central operation unit, CNX Converter, BLE Converter,

### **Optional accessories**

		HYG	CNX	TD <sub>E</sub>	<b>**</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
•	6 V/DC Lithium battery waterproof encased	•				CONE7157211100	965,00
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7157211200	1.069,00
CNX	30 V/DC power supply to CNX central operating unit	•	•		•	CONE7157211336	1.232,00
CIVA	(see chapter accessories)	•	•	•	•	CONE7157211360	1.356,00
sories	(see accessories for CONGENIAL FIT)		oout 170 m	nm, chrom	ed	CONO820170	179,00
Acces			oout 220 m	nm, chrom	ed	CONO820220	198,00

### Accessories for CONGENIAL FIT concealed wall-mounted faucet






# CONBOX FIT Raw-assembling set for concealed wall-mounted faucets, thermostat, DN15


Raw-assembling set for electronic wall-mounted faucets based on the adaptive multifunctional water path CONGENIAL, with thermostat, designed as faucet in nominal width DN15. Application area in new construction and renovation in public, semi-public and commercial sanitary facilities.

#### Consisting of:

- · Concealed box CONBOX FIT
- Recessed enclosure: ABS, dimensions (HxWxD min.) 216x157x127 mm, self-supporting
- Fastener brackets for mounting material with max. diameter 6 mm
- condensate drain slope, sealed and sound-insulated brass entrances and exits
- Inlet with shut-off valves R 1/2
- Mounting depth with final assembly set: 85-112 mm
- Flushing piece: ABS, waterless and hygienic tested for leakage
- Protective plug: EPS
- Gasket ring: PE, dimensions (WxH) 400x400 mm, with expansion zone

Description	Version	Article number	EUR
CONBOX FIT Raw-assembling set	for CONGENIAL FIT concealed wall-mounted faucet	CONR5112	187,00

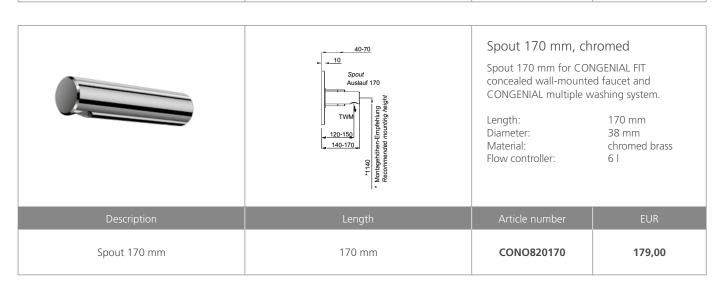


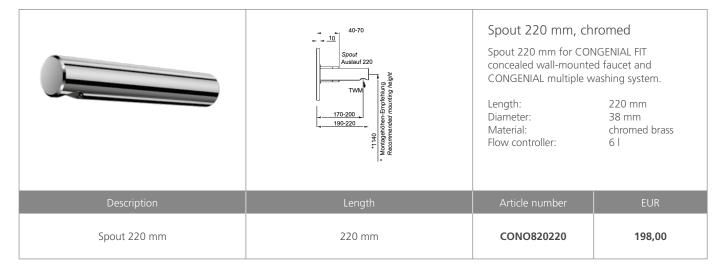





## Accessories for ultra concealed wall-mounted faucet GW20

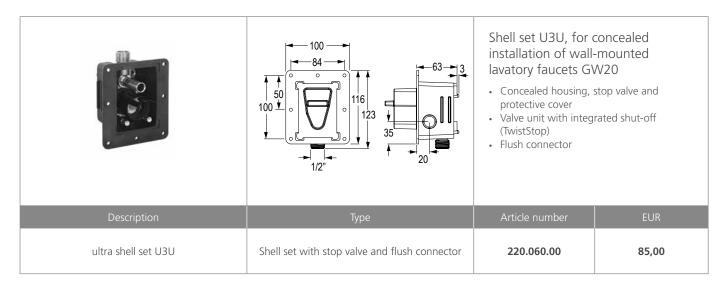

### ultra concealed wall-mounted faucet GW20



ultra concealed wall-mounted faucet GW20, with IR sensor, without temperature-mixing, chromed - final installation set

Touchless, electronically controlled lavatory faucet:


- For cold water or premixed water
- · Sturdy metal housing
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Vandal-resistant aerator (replaceable with integrated tool)
- Ruilt-in filta
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter
- Strainer cleaning (no shut-off required)
- One Tool Service all system parts accessible from above
- 12 or 24-hour hygienic flush, activatable with Touch
- Integrated battery unit for VARIO connect version
- Battery version is prepared for conversion to mains supply
- Automatic energy saving function (solar) and safety shutdown
- Installation in combination with ultra shell set U3U (not included)
- Compatible with Service APP: Control of stored operational data, settings and control functions











Battery: 6 V Lithium CRP2; life time up to 4 years

VARIOconnect: For single and multiple power supply and data connection

(Connection CNX or Service APP - see accessories)

Solar: Photovoltaic cell in combination with 4x1,5 V Alkaline AA batteries

(backup batteries) life time up to 8 years

Operating pressure: 0,3-10 bar Flow rate (approx.): 6 l/min (3 bar) Water temperature (max.): 80 °C Aerator: Aerator RC Connection: G 1/2

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

and hygienic flush time: 2 min pre-se Temporary-off: 2 min (fixed

Continuous water flow

2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed) Engineering standards: DIN EN 200; **C€** 

Required accessory: 220.060.00 ultra shell set U2U

Note: Service APP only available in conjunction with BLE Converter - no

permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered

	Stromversorgung	Drain assembly	Colour	Article number	EUR
	Battery	Without	Chrome	164.040.11	529,00
e C	Mains operation	Without	Chrome	164.056.11	513,00
-)<	Solar	Without	Chrome	164.048.11	574,00

### lino concealed wall-mounted faucet WV20



lino concealed wall-mounted faucet WV20, with IR sensor, without temperature-mixing, chromed - final installation set

Touchless, electronically controlled lavatory faucet for flush mounting:

- · For cold water or premixed water
- Sturdy version, front plate and spout made of metal, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Dual infrared sensors (with automatic setting feature), microprocessor
- Check valve and built-in filter
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- · Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Easy installation in combination with shell set Hansavarox basic unit U3V (not included)
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

120 mm / 170 mm / 220 mm Spout (x):

6 V Lithium CRP2 - commercial; life time up to 4 years Battery: VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

6 l/min / 1,6 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Economic aerator, CASCADE (self-cleaning) Aerator:

Built-in filter: 0,3 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology 1 s pre-set (adjustable with function key 0-10 s) Follow-up time:

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

DIN EN 200; Noise class I; **C€** Engineering standards:

220.027.00 shell set Hansavarox U3V Required accessory:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


Service APP only available in conjunction with BLE Converter - no

permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered

separately.





Versions Function key Click-plus Function key Click 120 mm 120.311.11 590,00 120.331.11 575,00 170 mm 120.310.11 601,00 120.330.11 589.00 Battery 220 mm 120.312.11 611,00 120.332.11 599,00 120 mm 120 321 11 573,00 120 341 11 558.00 572,00 VARIOconnect 170 mm 120.320.11 585,00 120.340.11 220 mm 120.322.11 596,00 120.342.11 580,00

### lino concealed wall-mounted faucet WV10

lino concealed wall-mounted faucet WV10, with IR sensor, with temperature-mixing, chromed - final installation set

Touchless, electronically controlled lavatory faucet for flush mounting:

- Sturdy version, front plate and spout made of metal, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Dual infrared sensors (with automatic setting feature), microprocessor
- Check valves and built-in filters
- Adjustable hot water limitation (mechanically)
- Temperature adjustable
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with Click
- Easy installation in combination with shell set Hansavarox basic unit U3V (not included)
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Protruding function key Click-plus (continuous-on, temporary-off) Click-plus:

Spout (x): 120 mm / 170 mm / 220 mm

6 V Lithium CRP2 - commercial; life time up to 4 years Battery: VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Built-in filters: 0,3 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s) Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min) 2 min (fixed) Temporary-off:

Engineering standards: DIN EN 200; Noise class I; C€

220.027.00 shell set Hansavarox U3V Required accessory:

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

Service APP only available in conjunction with BLE Converter - no

permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered




















	Versions		Function key Click-plus		Function key Click	
	Power supply	Spout (x)	Article number	EUR	Article number	EUR
		120 mm	120.471.11	629,00	120.371.11	617,00
°	Battery	170 mm	120.470.11	643,00	120.370.11	628,00
		220 mm	120.472.11	654,00	120.372.11	641,00
		120 mm	120.481.11	614,00	120.381.11	601,00
€	VARIOconnect 🗬	170 mm	120.480.11	626,00	120.380.11	613,00
		220 mm	120.482.11	635,00	120.382.11	624,00

## Accessories lino concealed wall-mounted faucet WV10 / WV20





#### Special flushing plug according to DIN 1988

VAROX basic unit, compact solution, DN15, concealed installation body for HANSAVAROX basic unit U3V.


The special flushing plug (accessory) is used for flushing for:

- lino concealed washbasin mixers WV10 / WV20 (absolutely necessary for flushing)
- lino concealed shower faucets DV30 / DV35 (flushing also possible with push-off plug).

Standard: **C€** 


Description	Version	Article number	EUR
Special flushing plug	suitable for HANSAVAROX basic unit U3V	550.024.00	61,00

### Accessories iQ concealed wall-mounted faucet A50

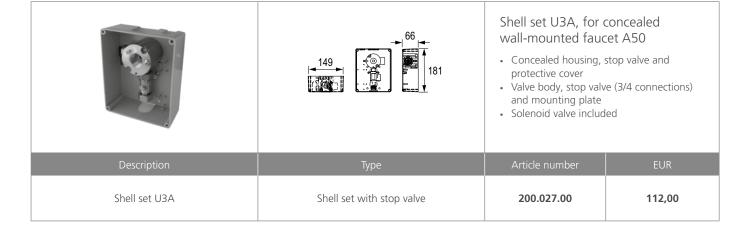

### iQ concealed wall-mounted faucet A50





Touchless, electronically controlled faucet for flush mounting:

- · For cold water or premixed water
- Sturdy version, brushed stainless-steel front cover and spout
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Dual infrared sensors (with automatic setting feature), microprocessor
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow with Click-plus adjustable
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush adjustable with Click
- Easy installation in combination with shell set U3A (not included)
- Compatible with Service APP: control of stored operational data, settings and control func-



Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Spout (x): 120 mm / 170 mm / 220 mm

6 V Lithium CRP2 - commercial; life time up to 4 years Battery: VARIOconnect: For single and multiple power supply and data connection (Connection CNX and Service APP - see accessories)

Operating pressure: 0.3-10 bar

6 l/min / 1,6 gpm (3 bar) Flow rate (approx.):

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow and hygienic flush time:

2 min pre-set (adjustable with function key 0,5-20 min) Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; C€

Required accessory: 200.027.00 shell set U3A

Service APP only available in conjunction with BLE Converter -Note:

no permanent evaluation option.


When using the Service APP, the BLE Converter must be ordered












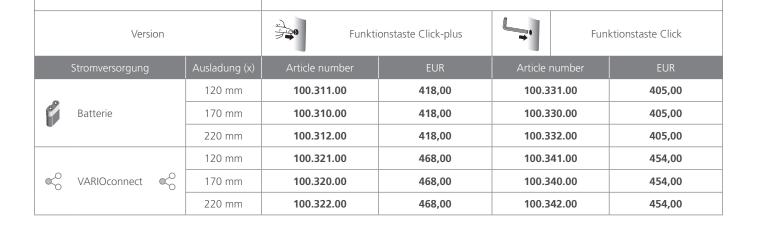



### CONBASE exposed wall-mounted faucet, IR sensor, without mixing, connection from top


















\* Example with spout in stainless steel V4A



# CONBASE exposed wall-mounted faucet, IR sensor, without mixing, spout 105 mm

Touchless, electronically controlled exposed wall-mounted faucet.

- Connection from top
- · For connection to cold or premixed water
- Without mixing
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Power supply (battery): 6 V/DC
Power supply (mains): 12 V/DC
Operating pressure: 1,5-5,0 bar
Flow rate: 6 I/min (3 bar)
Water temperature (max.): 70 °C
Water run time setting range: 3-180 s
Water run time factory setting: 30 s

Hygienic flush factory setting: 2 min pre-set (adjustable with Click 0,5-20 min)

Connection thread: R 1/2 AG

Dimensions (WxHxD): 220x250x185 mm Spout height: 135 mm

Spout height: 135 mm Projection: 165 mm

**Option\*:** Spout in stainless steel V4A

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be

Power supply Projection		Colour	Article number	EUR
Battery	165 mm	brushed stainless steel	CONE3518178100	599,00
Main power supply	165 mm	brushed stainless steel	CONE3518178200	599,00

### CONBASE exposed wall-mounted faucet, IR sensor, without mixing, connection from back














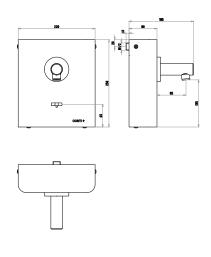

\*Example with spout in stainless steel V4A



# CONBASE exposed wall-mounted faucet, IR sensor, without mixing, spout 105 mm

Touchless, electronically controlled exposed wall-mounted faucet.

- Connection from back
- For connection to cold or premixed water
- · Without mixing
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Power supply (battery): 6 V/DC
Power supply (mains): 12 V/DC
Operating pressure: 1,5-5,0 bar
Flow rate: 6 l/min (3 bar)
Water temperature (max.): 70 °C
Water run time setting range: 3-180 s
Water run time factory setting: 30 s

Hygienic flush factory setting: 2 min pre-set (adjustable with Click 0,5-20 min)

Connection thread: R 1/2 AG

Dimensions (WxHxD): 220x250x185 mm Spout height: 135 mm

Spout height: 135 mm Projection: 165 mm

**Option\*:** Spout in stainless steel V4A

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be

	Power supply Projection		Colour	Article number	EUR	
6	Battery 165 mm		brushed stainless steel	CONE3519178100	599,00	
	Main power supply	165 mm	brushed stainless steel	CONE3519178200	599,00	

### CONBASE exposed wall-mounted faucet, IR sensor, without mixing, connection from top
















#### CONBASE exposed wall-mounted faucet, IR sensor, without mixing, spout 225 mm

Touchless, electronically controlled exposed wall-mounted faucet.

- · Connection from top
- For connection to cold or premixed water
- Without mixing
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Power supply (battery): 6 V/DC Power supply (mains): 12 V/DC Operating pressure: 1,5-5,0 bar Flow rate: 6 l/min (3 bar) Water temperature (max.): 70 °C Water run time setting range: 3-180 s Water run time factory setting: 30 s

Hygienic flush factory setting: 2 min pre-set (adjustable with Click 0,5-20 min)

R 1/2 AG Connection thread:

Dimensions (WxHxD): 220x250x305 mm Spout height: 135 mm 290 mm Projection:

When integrated into the CNX Water Management System, Note:

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be

Power supply Ausladung		Colour	Article number	EUR
Battery	290 mm	brushed stainless steel	CONE3518178120	633,00
Main power supply	290 mm	brushed stainless steel	CONE3518178220	633,00

### CONBASE exposed wall-mounted faucet, IR sensor, without mixing, connection from back
















# CONBASE exposed wall-mounted faucet, IR sensor, without mixing, spout 225 mm

Touchless, electronically controlled exposed wall-mounted faucet.

- · Connection from top
- For connection to cold or premixed water
- · Without mixing
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Power supply (battery): 6 V/DC
Power supply (mains): 12 V/DC
Operating pressure: 1,5-5,0 bar
Flow rate: 6 l/min (3 bar)
Water temperature (max.): 70 °C
Water run time setting range: 3-180 s
Water run time factory setting: 30 s

Hygienic flush factory setting: 2 min pre-set (adjustable with Click 0,5-20 min)

Connection thread: R 1/2 AG

Dimensions (WxHxD): 220x250x305 mm
Shout height: 135 mm

Spout height: 135 mm Projection: 290 mm

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.


When using the Service APP, the BLE Converter must be

Power supply Projection		Colour	Article number	EUR
Battery 290 mm		brushed stainless steel	CONE3519178120	633,00
Main power supply	290 mm	brushed stainless steel	CONE3519178220	633,00

### lino exposed wall-mounted faucet K20







lino exposed wall-mounted faucet K20, with IR sensor, without temperature-mixing (for cold or premixed water), stainless-steel

Touchless, electronically controlled wall-mounted faucet for surface installation:

- Sturdy stainless-steel housing with stiff spout (not pivotal)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Cold water supply connection with flexible high-pressure hose, built-in filter
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click
- · Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12. 24 as 40 leave level and stripping duplicated a suite for attended in the
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation with wall-mounting frame, opens to the front
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Spout: 172 mm / 220 mm

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6,5 l/min / 1,7 gpm (3 bar)

Water temperature (max.):80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hose: 350 mm Angle valve connection: G 3/8

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I;  $\epsilon$ 

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

110.240.01

separately.

	Versions				Fur	nction key Click	
	Power supply Projection (x)		Projection (x)	Colour	Article number	EUR	
	Pattern.		Battery $\circ$	172 mm	stainless steel	110.230.00	558,00
i	Battery	0	220 mm	stainless steel	110.230.01	536,00	
	Mains supply	00	172 mm	stainless steel	110.240.00	611,00	
1 1	"'/I IVIAILIS SUDDIV	- L					

stainless steel


220 mm

587,00

### lino exposed wall-mounted faucet K10







lino exposed wall-mounted faucet K10, with IR sensor, with temperature-mixing, stainless-steel

Touchless, electronically controlled wall-mounted faucet for surface installation

- Sturdy stainless-steel housing with stiff spout (not pivotal)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Hot and cold water supply connection with flexible hoses
- · Check valves and built-in filters
- fContinuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation with wall-mounting frame, opens to the front
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional functions

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Spout: 172 mm / 220 mm

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6,5 l/min / 1,7 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; €€

Optional: Conversion kit temperature handle with fixed temperature limit

at 42 °C (see accessories)

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered


Versions			Funct	ion key Click-plus	Fur	nction key Click
Power supply Spout (x)		Spout (x)	Article number	EUR	Article number	EUR
Datta		172 mm	110.250.00	657,00	110.270.00	644,00
Battery		220 mm	110.250.01	630,00	110.270.01	618,00
Concealed	٥	172 mm	110.260.00	709,00	110.280.00	696,00
mains power supply	0	220 mm	110.260.01	683,00	110.280.01	668,00

### lino exposed wall-mounted faucet K30









lino exposed wall-mounted faucet K30, with IR sensor, with thermostat, stainless-steel

Touchless, electronically controlled faucet for surface installation:

- Sturdy stainless-steel housing with stiff spout (not pivotal)
- Infrared sensors with automatic setting feature, microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Hot and cold water supply connection with flexible high-pressure hoses
- · Check valves and built-in filters
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- · Continuous water flow time and hygienic flush time adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with function key
- Installation with wall-mounting frame, opens to the front
- Installation with wall-mounting frame, opens to the front
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions

Click: Recessed function key - without additional function

Click-plus: Protruding function key Click-plus (continuous-on, temporary-off)

Spout: 172 mm / 220 mm

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V

Operating pressure: 0,3-10 bar

Flow rate (approx.): 6,5 l/min / 1,7 (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Flexible hoses: 350 mm Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)

Continuous water flow

and hygienic flush time: 2 min pre-set (adjustable with function key 0,5-20 min)

Temporary-off: 2 min (fixed)

Engineering standards: DIN EN 200; Noise class I; CE

Optional: Conversion kit temperature handle with fixed temperature limit at 42

°C (see accessories)

Optionally available with piezo pushbutton

Note: When integrated into the CNX Water Management System,

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be

Versions				Function key Click-plus		Function key Click	
	Power supply Spout (x)			Article number	EUR	Article number	EUR
	Dattani		172 mm	110.251.00	733,00	110.271.00	720,00
	Battery		220 mm	110.251.01	709,00	110.271.01	696,00
	Concealed	~0	172 mm	110.261.00	786,00	110.281.00	772,00
	mains power supply		220 mm	110.261.01	760,00	110.281.01	749,00

### lino exposed wall-mounted faucet W35

lino exposed wall-mounted faucet W35, with IR sensor, with thermostat, chromed

Touchless, electronically controlled wall-mounted faucet for surface installation:

- Sturdy version, faucet body made of brass, chromed
- Stiff spout and fixed sensor
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Temperature adjustable with thermostat-cartridge
- With anti-scalding and auto-thermic protection
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- · Continuous water flow adjustable with Click
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with Click
- Including S-connectors 3/4" and rosettes (lockable S-connector optional)
- Compatible with Service Monitor: control of stored operational data, settings and control functions



Spout (x): 200 mm / 260 mm

Operating pressure: 0,3-10 bar

Flow rate (approx.): 5 l/min / 1,3 gpm (3bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Built-in filters: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology

Follow-up time: 1 s pre-set (adjustable with Click 0-10 s)

Continuous water flow: 2 min pre-set (adjustable with Click 0,5-20 min)

Hygienic flush time: Adjustable with Touch 3 sec.-20 min.; 2 min (fixed)

Temporary-off: 2 min (fixed) Engineering standards: DIN EN 200; **C€** 




at 42 °C (see accessories)

Note: Service APP only available in conjunction with BLE Converter -

no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered



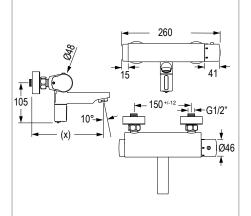

Power supply Spout (x)		Colour	Article number	EUR
Patton,	200 mm	Chromed	110.305.11	685,00
Battery	260 mm	Chromed	110.306.11	700,00

### lino exposed wall-mounted faucet W45



lino exposed wall-mounted faucet W45, with touchless Start/Stop function, with thermostat, chromed

Electronically controlled wall-mounted faucet for surface installation with touchless start/stop function (close detection):

- Sturdy version, faucet body made of brass, chromed
- Stiff spout
- Dual infrared sensors (close detection), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- · Temperature adjustable with thermostat-cartridge
- With anti-scalding and auto-thermic protection
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time activated by Touch
- Water flow time, sensor sensitivity activated by Touch
- 12, 24 or 48-hour hygienic flush adjustable with Touch
- Including S-connectors 3/4" and rosettes (lockable S-connector optional)

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years

Spout (x): 200 mm / 260 mm

Operating pressure: 0,3-10 bar

Flow rate (approx.): 5 l/min / 1,3 gpm (3 bar)

Water temperature (max.): 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Built-in filters: 0,5 mm mesh size

Water flow time: 7 s pre-set (adjustable with Touch 1-30 s)

Continuous water flow

and hygienic rinse time: 2 min pre-set (adjustable with Touch 0,5-20 min)

Temporary-off: 2 min (fixed); Engineering standards: DIN EN 200; C€



Conversion kit temperature handle with fixed temperature limit

at 42 °C (see accessories)

S-connector with stop valve, for exposed wall-mounted faucets


(see accessories)

Note: Service APP only available in conjunction with BLE Converter -

no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered





Power supply	Spout (x)	Colour	Article number	EUR
Battery	200 mm	Chromed	110.307.11	685,00
battery	260 mm	Chromed	110.308.11	700,00



### CONGENIAL double faucet assembly kit, piezo switch, thermostat, stainless steel
















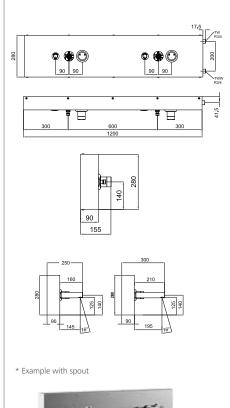

CONGENIAL double faucet assembly kit for wash troughs, with piezo switch, with thermostat, stainless steel

Multiple washing system with two electronic wall-mounted faucets for wash troughs, device designed in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Multiple washing system with rectangular cover plate
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Corrosion-resistant steel connecting lines
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the water path
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

#### **Execution options:**

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush of an electronic faucet can be carried out by programming via the piezo switch or the Service APP per faucet.

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP through the software parameter settings per faucet or faucet group...

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System, by the software parameter setting per faucet group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### CNX Water Management System:

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

### CONGENIAL double faucet assembly kit, piezo switch, thermostat, stainless steel

#### Technical data:

Operating voltage (mains): 12 V/DC
Operating voltage (CNX): 30 V/DC
Operating pressure: 1,5-5,0 bar
Water temp. standard operation (max.): 70 °C

Water temp. thermal disinfection: Short-term for therm. disinfection 80  $^{\circ}\text{C}$ 

Flow rate DN15: 0,15 l/s (flow rate regulator)

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

Hygienic flush setting range: 12, 24 or 72 h, can be deactivated via

setting on piezo switch, other hygienic flush intervals can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP68

Dimensions (HxWxD): 1200x280x90 mm

Distance between faucets: 600 mm

#### Required accessories:

central mains power supply or CNX central operation unit

CONO820170 / CONO820220 Spout 170 / 220 mm\*

#### **Optional accessories**

Retrofitting set electronic thermal disinfection

		HYG	CNX	TD <sub>E</sub>	<b>3.66</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7312201200	2.907,00
CNX	30 V/DC power supply to	•	•		•	CONE7312201336	2.608,00
CNX	CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7312201360	3.635,00
sories	see accessories for CONGENIAL	Spout 170 mm, chromed		CONO820170	179,00		
see accessories for CONGENIAL multiple washing system	multiple washing system	Sp	out 220 m	nm, chrom	ed	CONO820220	198,00

### CONGENIAL triple faucet assembly kit, piezo switch, thermostat, stainless steel



















90

\* Example with spout



CONGENIAL triple faucet assembly kit for wash troughs, with piezo switch, with thermostat, stainless steel

Multiple washing system with three electronic wall-mounted faucets for wash troughs, device designed in nominal diameter DN15. With thermostatic mixing device for connection to cold and hot water. Application in new construction building and renovation in commercial, semi-public and public sanitary facilities.

- Multiple washing system with rectangular cover plate
- Cover plate: stainless steel 1.4301, all visible surfaces made of brushed stainless steel
- Corrosion-resistant steel connecting lines
- · Multifunction tool for maintenance work
- Adaptive multifunctional water path CONGENIAL with solenoid valve 6 V/DC ROBUST, bistable
- Upgrade and retrofitting functions
- Water path: dezincification restistant forged brass, as a high-quality thermostatic mixer, thermostat handle: chromed brass
- Visible components made of solid chromed brass, with safety stop
- · Choice of temperature and setting range
- Integrated check valve in the bypass and check valve and strainer cartridges for water inlets
- All functional parts can be disassembled from the front during maintenance work without removing the water path
- Electronic operation via piezo switch with start/stop function, piezo switch: colour ring red, rosette chromed
- The water flow time is easily adjustable in electronic faucets

Power supply over 12 V/DC power supply for surface-mounted version Mains:

in installation box of for DIN top-hat rail mounting

Mains (CNX): Power supply over 30 V/DC power supply in the control panels 64 and 150

#### **Execution options:**

#### Hygienic flush (mains):

Hygienic flush (electronic): the hygienic flush of an electronic faucet can be carried out by programming via the piezo switch or the Service APP per faucet.

The water flow time of the faucet function can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP through the software parameter settings per faucet or faucet group...

The hygienic flush can be set and disabled for electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as interval or calendar function.

#### Thermal disinfection:

The thermal disinfection can be set as a calendar function in electronic faucets, integrated into the CNX Water Management System, by the software parameter setting per faucet group.

#### Cleaning stop CNX:

The operation stop (cleaning stop), interruption of the faucet function can be set in electronic faucets, integrated into the CNX Water Management System or via Service APP, by the software parameter settings per faucet or faucet group as a calendar function.

#### CNX Water Management System:

Integration of the faucet into the software-controlled CNX Water Management System for the automatic depiction of hygiene, system and safety functions of electronic showers, lavatory faucets and urinal flush valves at the BUS level. Parametrisation of individual devices and device groups. Tamper-proof documentation of all operating, action and function messages.

## CONGENIAL triple faucet assembly kit, piezo switch, thermostat, stainless steel

#### Technical data:

12 V/DC Operating voltage (mains): Operating voltage (CNX): 30 V/DC Operating pressure: 1,5-5,0 bar 70 °C Water temp. standard operation (max.):

Water temp. thermal disinfection: Short-term for therm. disinfection 80 °C 0,15 l/s (flow rate regulator)

Flow rate DN15:

Flow rate during thermal

disinfection DN15: 0,05 l/s (flow rate regulator)

Water flow time setting range: 3-180 s Water flow time factory setting: 30 s

12, 24 or 72 h, can be deactivated via Hygienic flush setting range:

setting on piezo switch, other hygienic flush intervals can be set via Service APP

Hygienic flush factory setting: 12 h after last water flow activation,

30 s water flow time

Electronic protection type: IP68

1700x280x90 mm Dimensions (HxWxD):

Distance between faucets: 600 mm

#### Required accessories:

central mains power supply or CNX central operation unit

CONO820170 / CONO820220 Spout 170 / 220 mm\*


#### **Optional accessories**


Retrofitting set electronic thermal disinfection

		HYG	CNX	TD <sub>E</sub>	<b>\$</b>		
Version	Power supply	Hygienic flush	Mains CNX	Thermal disinfection CNX	Cleaning stop	Article number	EUR
	12 V/DC series wiring to connect to central mains power supply (see chapter accessories)	•				CONE7313201200	4.097,00
CNY	30 V/DC power supply to	•	•		•	CONE7313201336	3.192,00
CNX	CNX central operating unit (see chapter accessories)	•	•	•	•	CONE7313201360	4.739,00
sories	see accessories for CONGENIAL		oout 170 m	nm, chrom	ed	CONO820170	179,00
Accessories	multiple washing system	Sp	oout 220 m	nm, chrom	ed	CONO820220	198,00



## Accessories for CONGENIAL multiple washing system

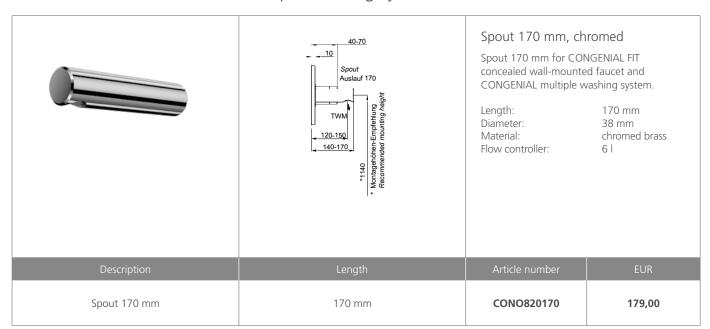

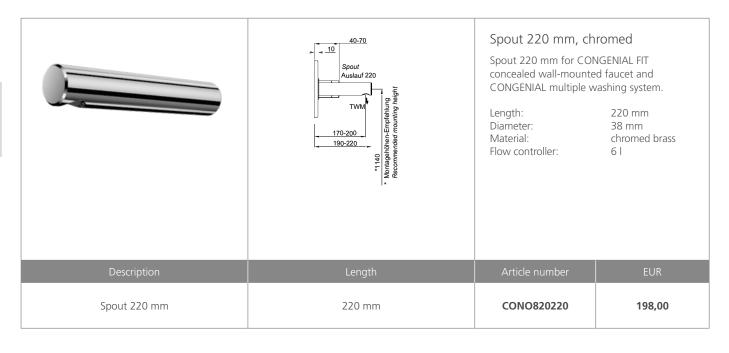

### lino multiple washing system W35



# lino multiple washing system W35, with IR sensor, with thermostat, chromed

Pre-assembled multiple faucet assembly kit with touchless lino exposed wall-mounted faucets W35, chromed, distribution lines in a surface-mounted stainless steel distributor, for wall mounting.

- Sturdy version, valve body DZR-brass
- Stiff spout and fixed sensor
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Temperature adjustable (with reliable thermostatic cartridge)
- With anti-scalding and auto-thermic protection
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- · Continuous water flow adjustable with Click
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with Click
- Lockable s-connections
- Compatible with Service APP: Control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years



Operating pressure:

0,3-10 bar

Flow rate (approx.):

4 l/min / 1 gpm (3 bar) per faucet

Water temperature (max.): 80 °C

Aerator: Economic aerator, cascade (self-cleaning)

Built-in filter: 0,5 mm mesh size

Sensor sensitivity: Automatic self-adapting sensor technology
Follow-up time: 1 s pre-set (adjustable with 0-10 s)
Continuous water flow: 2 min pre-set (adjustable with 0,5-20 min)
Hygienic flush time: Adjustable with 3 sec.-20 min.; 2 min (fixed)

Temporary-off: 2 min (fixed) Engineering standards: DIN EN 200;

Spout: 280 mm /10 °C

Mounting height: 350 - 450 mm above washbasin / gully Number of washing areas: 2 3 4 5 6

Width (X): 1200 1800 2400 3000 3600 mm


Dimensions (HxD): 250x80 mm
Fitting distance: 600 mm
Connection: R 3/4

Engineering standards: DIN EN 200; C€

Note: Service APP only available in conjunction with BLE Converter -

no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered



	Power supply	Spout	Faucet units	Article number	EUR	
	Battery 2		2 piece		CONE7352218100	7.417,00
			3 piece	CONE7353218100	10.261,00	
°		280 mm / 10°	4 piece	CONE7354218100	12.975,00	
	_	5 piece	CONE7355218100	16.123,00		
		6 piece	CONE7356218100	19.807,00		








### Hybrid kitchen faucet H10











#### Hybrid kitchen faucet H10, single-lever mixer with IR sensor, with temperature-mixing, chromed

Single-lever and touchless, electronically controlled kitchen faucet:

- Modular single-piece design with theft-proof battery box below the washbasin
- Sturdy brass housing, chromed
- High swivel spout, 360°
- Dual IR sensors (with automatic setting feature), microprocessor
- Hot and cold water supply connection with flexible high-pressure hoses
- Check valves and built-in filters
- Temperature and water flow adjustable with single-lever with functionally reliable ceramic cartridge and adjustable scalding protection
- Touchless, electronic function with automatic comfort switch, temperature adjustment for sensor operation over position of the lever in closed state
- Adjustment of the infrared sensor at the position of the bowl (centre, left, right) by rotation
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow adjustable with function key
- Follow-up time and sensor sensitivity adjustable with function key
- 12 or 24-hour hygienic flush activatable with function key
- Installation similar to conventional kitchen faucets
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Protruding function key with additional functions Click-plus:

6 V Lithium CRP2 - standard; life time up to 4 years Battery: Plug-in transformer 110-240 V 50/60 Hz / 6 V Mains supply: VARIOconnect: For single and multiple power supply and data connection

(Connection to CNX, Service APP - see accessories)

Operating pressure: 0,3-10 bar

Single-lever mixer: approx. 11 l/min / 2,9 gpm (3 bar) Flow rate:

Sensor: approx. 5 l/min / 1,3 gpm (1-5 bar)

Flexible hoses: Angle valve connection: G 3/8

0.5 mm mesh size Filters:

Automatic self-adapting sensor technology Sensor sensitivity: Sensor range: Activation of object recognition (approx. 250 mm)

per close sensors (approx. 50 mm)

1 sec pre-set (adjustable with function key 0-10 sec.) Follow-up time:

Continuous water flow and hygienic flush time:

2 min pre-set (adjustable with function key 0,5-20 min.)

Temporary-off: 2 min (fixed) Engineering standards: DIN EN 200; **C€** 

When integrated into the CNX Water Management System, Note:

the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

	Power supply		Drain assembly	Colour	Article number	EUR
	Battery	<b>∞</b> 0	Without	Chrome	131.800.11CO	646,00
	Mains operation exposed	<b>€</b> 0	Without	Chrome	131.810.11CO	675,00
<b>€</b>	VARIOconnect	ec0	Without	Chrome	131.816.11CO	639,00





## lino SofTouch ST20, stainless steel, without mixing



### lino SofTouch ST20, stainless steel, without mixing

Hydraulic controlled self-closing faucet.

- For connection to cold or premixed water
- Depending on activating duration water run time could be adjusted (run time  $12 \pm 3$  s at activating duration of 1 s)
- Reliable hydraulic cartridge
- Vandal-proof hydraulic cartridge due to limited actuation path of press button
- Casing and press button: stainless steel

Operating pressure: 0,5–10 bar Flow rate: 6 l/min (3 bar)

Water temperature (max.): 80 °C


Activation force (max.): 15 N (independent of water pressure)

Flexible hoses: approx. 350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Jet angle: 40°
Spout height: 83 mm
Projection: 90 mm




Description	Spout projection	Colour	Article number	EUR
lino SofTouch ST20, without mixing	90 mm	Stainless steel	CONM8110104000	203,00

## lino SofTouch ST20, chromed, without mixing







### lino SofTouch ST20, chromed, without mixing

Hydraulic controlled self-closing faucet.

- For connection to cold or premixed water
- Depending on activating duration water run time could be adjusted (run time 12  $\pm$  3 s at activating duration of 1 s)
- Reliable hydraulic cartridge
- Vandal-proof hydraulic cartridge due to limited actuation path of press button
- · Casing and press button: stainless steel, chromed

Operating pressure: 0,5-10 bar Flow rate: 6 l/min (3 bar)

Water temperature (max.): 80°C

Activation force (max.): 15 N (independent of water pressure)

Flexible hoses: approx. 350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size


Jet angle: 40°
Spout height: 83 mm
Projection: 90 mm

Description	Spout projection	Colour	Article number	EUR
lino SofTouch ST20, without mixing	90 mm	Chromed	CONM8150104000	177,00

## lino SofTouch ST10, stainless steel, with mixing







### lino SofTouch ST10, stainless steel, with mixing

Hydraulic controlled self-closing faucet.

- For connection to hot and cold water
- Depending on activating duration water run time could be adjusted (run time  $12 \pm 3$  s at activating duration of 1 s)
- Adjustable temperature
- Adjustable hot water fixation
- Reliable hydraulic cartridge
- Vandal-proof hydraulic cartridge due to limited actuation path of press button
- Casing and press button: stainless steel

Operating pressure: 0,5-10 bar Flow rate: 6 l/min (3 bar)

Water temperature (max.): 80°C

Activation force (max.): 15 N (independent of water pressure)

Flexible hoses: approx. 350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size


Jet angle: 40° Spout height: 83 mm Projection: 90 mm

Description	Spout projection	Colour	Article number	EUR
lino SofTouch ST20, with mixing	90 mm	Stainless steel	CONM8110204000	215,00

## lino SofTouch ST10, chromed, with mixing







#### lino SofTouch ST10, chromed, with mixing

Hydraulic controlled self-closing faucet.

- For connection to hot and cold water
- Depending on activating duration water run time could be adjusted (run time  $12 \pm 3$  s at activating duration of 1 s)
- Adjustable temperature
- Adjustable hot water fixation
- · Reliable hydraulic cartridge
- Vandal-proof hydraulic cartridge due to limited actuation path of press button
- · Casing and press button: stainless steel, chromed

Operating pressure: 0,5-10 bar Flow rate: 6 l/min (3 bar)

Water temperature (max.): 80 °C

Activation force (max.): 15 N (independent of water pressure)

Flexible hoses: approx. 350 mm

Angle valve connection: G 3/8

Built-in filters: 0,5 mm mesh size

Jet angle: 40° Spout height: 83 mm Projection: 90 mm

Description	Spout projection	Colour	Article number	EUR
lino SofTouch ST20, with mixing	90 mm	Chromed	CONM8150204000	191,00

## CONWASH self-closing lavatory faucet



# CONWASH self-closing lavatory faucet, without temperature-mixing, chromed, DN15

- For connection to cold or premixed water
- Solid metal housing
- · Housing actuator made of brass, chromed
- Without temperature-mixing
- Adjustable flow rate
- · Hygienic aerator
- 2 Plastic clips: plastic clip red and blue for cold or premixed water display

Operating pressure: 1,0-5,0 bar

Flow rate: 3,0-15,0 l/min / 0,8 - 4,0 gpm adjustable (3 bar) Water temperature (max.): 50  $^{\circ}$ C (brief up to 75 $^{\circ}$ C for thermal disinfection)

Aerator: Hygienic Aerator

Flexible hose: Certified with flexible connection cable 400 mm (inner tube mate-

rial according to DVGW W 543 and W 270 and KTW A, external


stainless steel braid) and filter seal

Connection: Compression fitting for pipe D10 mm Follow-up time: Approx. 7 s according to DIN EN 816

Outlet height: 75 mm

Spout projection: 101 mm / 45°

Engineering standards: Noise category I



Description	Spout projection	Colour	Article number	EUR
CONWASH self-closing lavatory faucet	101 mm	Chromed	CONM3364100000	225,00

## CONWASH wall-mounted self-closing faucet



CONWASH wall-mounted self-closing faucet, without temperature-mixing, chromed,  $\ensuremath{\mathsf{DN15}}$ 

- For connection to cold or premixed water
- For wall-mounting
- Housing actuator made of brass, chromed
- Without temperature-mixing
- Adjustable flow rate
- Hygienic aerator
- Rosette: Ø 48 mm
- 2 plastic clips: plastic clip red and blue for display of cold or premixed water

Operating pressure: 1,0-5,0 bar


Flow rate: 3,0-15,0 l/min / 0,8-4,0 gpm adjustable (3 bar) Water temperature (max.): 50 °C (brief up to 75°C for thermal disinfection)

Aerator: Hygienic aerator

Connection: G 1/2 B

Follow-up time: Approx. 7 s according to DIN EN 816

Spout projection: 110 mm
Engineering standards: Noise category I



Description	Spout projection	Colour	Article number	EUR
CONWASH wall-mounted self-closing faucet	110 mm	Chromed	CONM4664100000	205,00

## CONMED long handle single-lever faucet



# CONMED long handle single-lever faucet, for health-care sector, chromed, DN15

- For connection to hot and cold water
- With fixed spout and long lever
- Mainly for medical sector
- Housing made of solid brass, chromed
- Reinforced fixing with 2 stainless steel bolts and lock nuts
- Ceramic cartridge with temperature stop (pre-set max. temperature)
- Integrated flow controller 5 l/min / 1,3 gpm
- With hygienic aerator and flexible PEX connection hoses 350 mm stainless steel braiding
- · Dirt trap filters
- Drain assembly 11/4 and pull rod made of brass, chrome plated

Operating pressure: 0,5-8,0 bar


Flow rate: 4,8 l/min / 1,3 gpm (3 bar)

Water temperature (max.): 70 °C (Thermal disinfection possible)

Aerator: Hygienic aerator

Flexible hoses: Flexible PEX connection hoses with stainless steel 350 mm

Connection: G 3/8
Outlet height: 85 mm
Spout projection: 135 mm
Lever length: 150 mm



Description	Spout projection	Colour	Article number	EUR
CONMED long handle single lever faucet faucet	135 mm	Chromed	CONM3367100000	362,00

## CONMED wall-mounted single-lever faucet



## CONMED wall-mounted single-lever faucet for health-care sector, chromed, DN15

- For connection to hot and cold water
- For wall-mounting
- With swivel spout and long lever
- Mainly for health-care sector
- Housing made of solid brass with S-connections
- Ceramic cartridge with temperature stop (maximum temperature preset) and adjustable flow.
- Swivel, self-draining, smooth interior framed outlet D22 mm
- With hygienic aerator to reduce the formation of bacteria
- Brass housing, chromed


Operating pressure: 6,0 bar

Flow rate: 9,0 l/min / 2,4 gpm (3 bar) Water temperature (max.): 70  $^{\circ}$ C (thermal disinfection possible)

Aerator: Hygienic Aerator

Flexible hoses: Flexible PEX connection hoses with stainless-steel 350 mm

Connection: G 1/2 B Spout projection: 200 mm Lever length: 150 mm



Description	Spout projection	Colour	Article number	EUR
CONMED wall-mounted single lever faucet	200 mm	Chromed	CONM4667100000	507,00

## CONTHERM thermostatic mixing valve



#### CONTHERM thermostatic mixing valve, DN15, with connection set

- For mounting under the table
- For connection to hot and cold water
- Intrinsically safe
- Anti-scalding protection
- Safety stop and "Legionella handle" for easy manual thermal disinfection
- Housing and temperature adjustment handle made of brass, chromed
- With integrated backflow preventer

Thermostatic mixing valve with connection set consisting of:

- 1 Thermostat battery
- 1 Connection set for mounting on existing angle valves


Thermostatic mixing valve without connection set consisting of:

• 1 Thermostat battery

Operating pressure: 5,0 bar

Flow rate: 12 l/min / 3,2 gpm (1 bar)

Water temperature (max.): 75 °C
Temperature range: 30-70 °C
Connection entry: G 3/8 B
Connection drain: G 3/8



Description	Version	Nominal width	Article number	EUR
CONTHERM thermostatic mixing valve	With connection set	DN15	CONM91640000000	235,00

## CONTHERM thermostatic mixing valve




- For mounting under the table
- For connection to hot and cold water
- Intrinsically safe
- Anti-scalding protection
- Safety stop and "Legionella handle" for easy manual thermal disinfection
- Housing and temperature adjustment handle made of brass, chromed
- With integrated backflow preventer

#### Consisting of:

1 Thermostat-battery

Operating pressure: 5,0 bar
Flow rate: 0,2 l/s (1 bar)
Water temperature (max.): 75 °C
Temperature setting range: 30-70 °C
Inlet connection: G 3/8 B
Outlet connection: G 3/8





Description	Version	Nominal width	Article number	EUR
CONTHERM thermostatic mixing valve	Without connection set	DN15	CONM91640001000	191,00





## Accessories for faucets

Central mains power supply for	
multiple or single installations	326
Battery exchange kits	328
Splitter for multiple installations	329
nstallation cables	330
CNX Converter	331
BLE Converter	
Conversion kits	
S-connector	332
Hose set	333
Adapter	
Aerators	333
Cleaning products	335
Tool kit	335

# CONTI+ MODULAR in accessories and spare parts





#### CONTI+ Spare parts list

CONTI+ spare parts list for shower- and washrooms for:

- Spare parts
- Accessories and optional functions
- Exploded assembly drawings

#### Download:

 $https://conti.plus/fileadmin/conti.plus/world/downloads/SPARE-PARTS-Catalouge\_EN.pdf$ 



Installation and maintenance videos: https://www.youtube.com/channel/UCMd3Te3wmkiuhkgG8GPaLQQ



# CONNECTION OPTIONS CONTI+ VARIOconnect



#### CONTI+ faucet variations

One CONTI+ faucet – five connection options: many ways to ensure optimum, resource-efficient, hygienic, robust and safe operation.

The battery integrated in the faucet body (battery solution) is included in the standard delivery. In addition to this version, the connection can also be upgraded with the following VARIOconnect options:



Single station battery option 6 V | ①

The adjacent battery solution (with external battery) can be used if, despite planning, no electric cable has been laid.



Single station power supply option 230/6 V/DC | ②
The classic mains connection with a plug-in power supply unit combined with a 230 V socket.



Single station power supply option (flush mounted) 230/6 V/DC | (3)

The best mains connection if appearance and safety are the main priorities.



Central power supply (flush mounted) 230/12/6 V/DC | ④ Up to 30 faucets can be powered by a concealed central mains receiver. Direct connection via a flush mounted splitter set for multiple installations makes this a more cost effective version than the single station option.



Central power supply (CNX) 230/30 V/DC | ⑤
Up to 150 faucets can be connected to the control centre of the CONTI+ CNX Water Management
System, with all its control and monitoring benefits, in combination with the flush mounted CNX converters.

230 V/DC

### Central mains power supplies for multiple installation



#### Concealed central power supply, for up to 30 units

#### Suitable for:

- All lavatory faucets with VARIOconnect for multiple installations up to 30 units (except lumino L10i and L10c)
- Urinal flush valves with VARIOconnect (U10, U18, U28)
- Multiple installation bypass for lino flush-mounted shower faucets up to 30 units
- Exclusively for use with flush-mounted splitters 550.042.00 or 550.43.00 or 550.044.00

#### Consisting of:

- Concealed mains power supply 110-240 V / 12 V  $\,$
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves

Description	Installation type	Voltage	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 30 units	110-240 V / 12 V	550.041.00	128,00




#### Concealed central mains power supply, for up to 12 units

#### Suitable for:

- All lavatory faucets with VARIOconnect in multiple installations up to 12 units (except lumino L10i and L10c)
- Shower panel CONPRIMUS, lavatory faucet lino PRIMUS upright faucet L40 (single installation)
- Urinal flush valves with VARIOconnect (U10, U18, U28) up to 12 units
- Multiple installation bypass for lino flush-mounted shower faucets up to 12 units
- Exclusively for use with flush-mounted splitters 550.042.00 or 550.43.00 or 550.044.00

#### Consisting of:



- Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves

Description	Installation type	Voltage	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 12 units	110-240 V / 12 V	550.045.00	88,00

## Concealed mains power supply for single installation



#### Concealed mains power supply for single installation

#### Suitable for:

- Flush-mounted lino shower faucets DV35 / DV30
- Wall-mounted lavatory faucets WV10 / WV20 / GW20 with VARIOconnect
- Single installation bypass for lino flush-mounted shower faucets DV35 / DV30B with VARIOconnect

#### Consisting of:

- Concealed mains power supply 110-240 V / 6 V
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets

Description	Installation type	Voltage	Article number	EUR
Concealed mains power supply, with flush-mounted outlet	For single installation	110-240 V / 6 V	550.026.00	79,00

## Mains power supplies for single installation for faucets with VARIOconnect



#### Concealed mains power supply for single installation

Suitable for all lavatory faucets with VARIOconnect

#### Consisting of:

- Concealed power supply 110-240 V / 6 V
- · Flush-mounted box for masonry
- Flush-mounted box for drywall construction
- With white cover and waterproof cable grommet

Description	Installation type	Voltage	Article number	EUR
Concealed mains power supply, with flush-mounted outlet	For single installations	110-240 V/6 V	550.030.01	85,00

### Twin plug power supply unit



#### Twin plug power supply unit 110-240 V / 6 V

Power supply unit 110-240 V / 6 V with socket for additional electrical devices drawing up to max. 10 A for all lavatory faucets with VARIOconnect (except lumino L10i and L10c).

Description	Voltage	Article number	EUR
Twin plug power supply unit	110-240 V/ 6 V	550.031.00	85,00

## Single plug power supply unit



#### Single plug power supply unit 100-240 V / 6 V

Suitable for all lavatory faucets with VARIOconnect with fixed plug

Description	Region	Article number	EUR
Single plug power supply unit	Europe	550.032.00	48,00
Single plug power supply unit	United States of America	550.032.00US	on request
Single plug adapter power supply unit	Australia	550.032.00AU	on request
Single plug adapter power supply unit	United Kingdom	550.032.00UK	on request

## Battery exchange kits



#### Battery exchange kit 2CR5

For following models: A10, A20, A30, U20, U40, U50, U51

Consisting of:

• Battery (6 V Lithium 2CR5 resp. DL 245)

Description	Article number	EUR
Battery exchange kit 2CR5	CONZ8955003	16,00



#### Battery exchange kit CRP2

For following models: 2in1, A50, D10, G10, G20, G30, K10, K20, K30, L10, L20, L30, L15, L15P, L25, L25P, M10, M20, U10, U18, U28, U60, U55, W10, W30, W35, W45, WV10, WV20, H10.

Consisting of:

• Battery (6 V Lithium CRP2 resp. DL 223 A)

Description	Article number	EUR
Battery exchange kit CRP2	CONZ8955004	16,00



#### Battery exchange kit, waterproof encased

For all VARIOconnect models and D30, D35, DV30, DV35

Consisting of:

• Battery waterproof encased (6 V Lithium CRP2 resp. DL 223 A)

Description	Article number	EUR
Battery exchange kit, waterproof encased	550.000.05	34,00

## Battery box



#### Waterproof battery box incl. battery

For all VARIOconnect models and P10, P20, P30, P15, P25, P35, (M10, M20 til 05/13), G10, G20

NOT suitable for ultra GS!

Description	Article number	EUR
Waterproof battery box incl. battery	CONZ8955006	34,00

### Splitter for multiple installations with VARIOconnect



## Flush-mounted splitter set with flush-mounted outlet for multiple installations

- Exclusively for use with the flush-mounted central power supply units for multiple faucet/ flush valve installations (550.041.00 or 550.045.00) with VARIOconnect
- Not compatible with lumino L10i and L10c
- One splitter set is required for each connected unit and bypass solenoid valve

#### Consisting of:

- · Flush-mounted box with white cover
- Splitter for voltage range 12 VAC/VDC-28 VAC/VDC
- 3 Terminals (1x input, 1x output looped, 1x 6 V output)
- Installation cable 3000 mm with plug-in connector for faucets/flush valves

Description	Installation type	Article number	EUR
Flush-mounted splitter set, with flush-mounted outlet	For multiple installations	550.042.00	49,00



## Flush-mounted splitter set for multiple installations with surface mounted


- Exclusively for use with the flush mounted central power supply units for multiple faucet/flush valve installations (550.041.00 or 550.045.00)
- Not compatible with lumino L10i and L10c
- One splitter set required per connected unit and bypass solenoid valve

#### Consisting of:

- Flush-mounted box with white cover and cable grommet
- Splitter for voltage range 12 VAC/VDC 28 VAC/VDC
- 3 Terminals (1x input, 1x output looped, 1x6 V output)
- Installation cable 850 mm routed through the cover, with plug-in connector for faucets



Description	Installation type	Article number	EUR
Flush-mounted splitter set, with surface-mounted outlet	For multiple installations	550.043.00	52,00



#### Flush-mounted splitter for multiple installations

#### Suitable for:

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- One splitter set required per connected faucet/urinal flush valve and bypass solenoid valve

#### Consisting of:

- Splitter for voltage range 12 VAC/VDC-28 VAC/VDC
- 3 Terminals (60 mm)
- Installation cable lenght (x) mm with plug-in connector for faucets

Description	Installation type	Lenght (x)	Article number	EUR
Chick mounted colittee set	For multiple installations	1200 mm	550.044.12	48,00
Flush-mounted splitter set	For multiple installations	3200 mm	550.044.32	52,00

## Splitter for multiple installations with VARIOconnect



#### Flush-mounted splitter for multiple installations

#### Suitable for

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- A splitter set is required for each connected faucet and bypass solenoid valve


#### Consisting of:

- Splitter for voltage range 12 VAC/VDC-28VAC/VDC
- 3 Terminals (60 mm)



Description	Installation type	Article number	EUR
Flush-mounted splitter set	For multiple installations	550.044.00	45,00

### Installation cable for multiple installations




Installation cable for multiple installations, 300 mm / 1200 mm / 3200 mm Sheathed with additional protective insulation

#### Consisting of:

- 1x 8 mm plug, water resistant (female)
- 1x 8 mm plug, water resistant (male)

Description	Installations type	Length (x)	Article number	EUR
	For multiple installations	300 mm	550.037.03	7,00
Installation cable	For multiple installations	1200 mm	550.037.12	15,00
	For multiple installations	3200 mm	550.037.32	19,00



Installation cable for multiple installations with open wires, 3000 mm Sheathed with additional protective insulation

#### Consisting of:

- 1x Plug 8 mm (female)
- 1x Tin-plated wires

Description	Installations type	Length (x)	Article number	EUR
Installation cable with open wires	For multiple installations	3000 mm	550.046.30	16,00

### **CNX** Converter



#### CNX Converter 6 V

To integrate CONTI+ faucets (with the exception of CONPRIMUS and lino PRIMUS upright faucet L40) into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 30 V to 6 /12 V.

Operating voltage: 30 V/DC Input: Approx. 17 mA Protection: IP68 Notice: CONO214641 includes:

• Flush-mounted socket for masonry

Flush-mounted socket for dry construction

Description	Material	Article number	EUR
CNX Converter 6V	Plastic	CONO210000	177,00
CNX Converter for flush-mounted socket 6V	Plastic	CONO214641	275,00



#### CNX Converter 12 V

To integrate CONTI+ faucets CONPRIMUS and lino PRIMUS upright faucet L40 into the CNX Water Management System, by means of waterproof quick connectors (not included in the scope of delivery), connecting cable and plug, conversion of the input signal from 24V to 12V.

Operating voltage: 12 V/DC Input: Approx. 17 mA Protection: IP68

Notice: CONO211012 includes:
• Flush-mounted socket for masonry

• Flush-mounted socket for dry construction

Description Material Article number EUR
CNX Converter 12 V (CONPRIMUS) Plastic CONO210012 177,00
CNX Converter for flush-mounted socket 12 V Plastic CONO211012 275,00

### **BLE Converter for Service APP**



#### BLE Converter for CONTI+ Service APP

To build up a Bluetooth® connection between CONTI+ faucets and a mobile control unit as smartphone or tablet. Smart faucet connection via CONTI+ Service APP.

#### Technical data:

Bluetooth® low energy Operating voltage:

Operating voltage: 6-12 V/DC Protection: IP68

Description	Colour	Article number	EUR
BLE Converter	Black	CONO260000	67,00

### Conversion kits



Conversion kit temperature handle with fixed temperature limit at 42  $^{\circ}$ C For model W35/W45

• Incl. anchor ring 42 °C

Description	Colour	Article number	EUR
Conversion set temperature handle with fixed temperature limit at 42 °C	Chromed	550.069.11	48,00



Conversion kit temperature handle with fixed temperature limit at 42  $^{\circ}\text{C}$  For model K30

- Incl. anchor ring 42  $^{\circ}\text{C}$ 

Description	Colour	Article number	EUR
Conversion set temperature handle with fixed temperature limit at 42 °C	Chromed	550.067.11	48,00

#### S-connector




Connector with stop valve, for surface-mounted faucets, chromed

- DN 15, G 3/4 x G 1/2
- SW 2,5 /10 mm eccentric
- Complete with rosette
- 2 pieces included

Description	Colour	Article number	EUR
S-conector with stop valven	Chrome	550.016.11	on request

#### Hose set



#### Hose set (hose and filter)

- One hose made of stainless steel
- · Connection via plug-adapter
- Angle valve connection via alternative connecting nut (3/8", 1/2" or 9/16") Mesh filter in alternative sizes (3/8", 1/2" or 9/16")
- Alternatively available with colour marking on the hose
- Not suitable for: lumino, umaxx, Senso, ran
- Not suitable for wall-mounted faucets

Description	Connection (Y)	Length (X)	Туре	Article number	EUR
	3/8"	450 mm		550.010.00	8,00
	3/8"	600 mm		550.010.01	18,00
Hospitat (base and filter)	1/2"	400 mm		550.010.02	9,00
Hose set (hose and filter)	1/2"	350 mm	blue	550.010.03	23,00
	1/2"	350 mm	red	550.010.04	23,00
	9/16"	400 mm		550.010.05	8,00

## Adapter



#### Adapter

- Adapter to connect 3/8" hoses with an 1/2" angle valve
- External thread 3/8" inner thread 1/2"
- Including 1/2" flat seal

Description	Туре	Article number	EUR
Adapter	3/8"-1/2"	550.095.00	9,00

#### Aerator



#### Aerator AG M24x1, theft-proof

Theft-proof, chromed

Connection: AG M24x1

7,2 l/min / 1,9 gpm (3bar) Flow volume:

Water temperature (max.): 90 °C

In combination with:

CONM3364200000 CONWASH self-closing lavatory faucet

Description	Version	Article number	EUR
Aerator AG M24x1	theft-proof	CONO810000	18,00

#### Aerator



#### flex aerator with screw thread M24x1

- Pivoting aerator
- Suitable for: A10, A20, L10, L20, L10i, L15P, L25P, M10, M20, A50, WV20, WV10, K10, K20, W35, W45

Adjustment angle: ± 7°

Description	Туре	Flow rate	Article number	EUR
Flex aerator with screw thread M24x1	HONEYCOMB S SR	6 I/min / 1,6 gpm	550.005.11	7,00



### Aerator for loopino

• Suitable for: G10, G20

Description	Туре	Flow rate	Article number	EUR
Aerator for loopino	CACHÉ PCA	1,32 l/min / 0,35 gpm	550.008.11	8,00



#### Aerator with screw thread M24x1

• Suitable for: A10, A20, L10, L20, L10i, L15P, L25P, M10, M20, A50, K10, K20, W35, W45

Description	Туре	Flow rate	Article number	EUR
Aerator with screw thread M24x1	HONEYCOMB Laminar	6 l/min / 1,6 gpm	550.001.11	7,00
	CASCADE PCA	1,89 l/min / 0,5 gpm	550.002.11	10,00
	PCA Spray	1,32 l/min / 0,35 gpm	550.003.11	8,00
	CASCADE PCA	1,32 l/min / 0,35 gpm	550.004.11	10,00

## Cleaning products



#### Microfiber cloth (grey)

Soft microfiber cloth for professional use. With velvety surface for slightly textured, smooth and delicate surfaces, very good for cleaning stainless steel, chromed, aluminium, faucets and lacquered surface, washable up to 95  $^{\circ}$ C.

Description	Dimension	Article number	EUR
Microfiber cloth grey	Approx. 400x400 mm	CONO690200	16,00



#### Cleaner BR75

Swimming pool and sanitary cleaners for all public and private swimming pools, toilets (urinals), showers and bath rooms, acid-resistant tiles and sanitary porcelain, as well as for removal of cement veils.

Description	Filling quantity Article number E			
Cleaner BR75	1000 ml	CONO690100	41,00	

#### Tool kit



#### Tool kit for service and assembly of CONTI+ faucets

#### Consisting of:

- 1 Hook wrench 38 mm
- 1 Allen key SW 3x36x16,5
- 1 Face spanner adjustable
- 1 Face spanner-screwdriver with handle
- 1 Hexagon key SW 2x100
- 1 Hexagon key SW 2,5x100
- 1 Hexagon key SW 3x100
- 1 Hexagon key SW 6x160
- 1 Allen key SW 4x140x28
- 1 Microfiber cloth
- 1 Tool-belt bag

Description	Colour	Article number	EUR
Tool kit for service and assembly of CONTI+ faucets	Black/Blue	CONO690300	155,00







#### Surface with gel coating

To provide optimal solutions for your washroom across the range, our washbasins with gel coating feature a variety of fronts, forms, surfaces and finishes: with a slate structure or smooth, with straight or rounded basin edges, centred or offset basins as well as with integral towel rail. Available in White matt, Anthracite matt, White gloss or RAL Classic colours. Our CONTI+ washbasins can be adapted to meet all customer requirements.

CONTI+ mineral-cast washbasins (White matt or gloss) are pleasantly warm to the touch. Washbasins made of mineral composite material are cast in one piece and are individually manufactured to customer requirements (on request with bevel cuts, recesses, drilled holes, etc.).

### Surface without gel coating

CONTI+ washbasins made of mineral composite material have no surface layer. This homogeneous material with a matt surface is pleasantly warm to the touch. The washbasins are cast in one piece and are individually manufactured to customer requirements (including bevel cuts, recesses, drilled holes, etc.).



### Cleaning and care

#### With gel coating

Clean the glossy, non-porous surface with standard, NON-abrasive liquid cleaners and a soft cloth. Cigarette stains or nail polish can be removed from the gloss surface using polishing paste or nail polish remover as appropriate.

#### Without gel coating

Clean the matt surface with standard abrasive cleaners (cream cleaner, yellow-green sponge, microfibre cloth, etc.). Cigarette stains or nail polish can be removed using wet sandpaper; clean with cleaning pads or an equivalent product.

#### Stainless steel products

Many of the SteelTec products are partially or completely covered in plastic film. This film provides protection during transportation but must be removed from the product before use. SteelTec products made of AISI 304 stainless steel must be cleaned regularly to maintain their original quality. Use cleaning products and clear water to do this after use. Rinse with clear water and wipe dry. Also clean any loose parts such as the drain quard. Do not allow water to dry on the product.

Although stainless steel is very hard-wearing, sharp objects may scratch the surface. Such scratches are highly visible on a new product. Over time they will become fainter without the product losing its shine.

Never use scouring powder or steel wool to clean the surface. As well as causing scratches, there is a risk of rusting. Do not use chlorinated solvents. Silver cleaners can leave very tough stains. Foods containing acids or similar must be removed as soon as possible. Discolouration and tough stains are often caused by contaminated water or other substances. These can be removed using a special stainless steel polish. Shine can be restored to dull areas by rubbing in chalk with a soft cloth.

#### General:

- Remove protective film only before the final cleaning.
- The temperature of service water must not exceed 55 °C (80 °C momentarily).
- To avoid staining, hair dye must be removed within a matter of seconds if it comes into contact with the surfaces.

## Washbasin mineral cast gelcoat, angular, white matt, width 500-1600 mm



## Washbasin mineral cast gelcoat, angular, white matt


- Angular basin
- With gelcoat coating
- Colour: white matt
- · Without overflow
- With tap hole Ø 35 mm
- With 2 pieces mounting angle

#### Dimensions

Washbasin (WxHxD): 500-1600x100x460 mm Basin (WxHxD): 415x80x255 mm Tap hole: Ø 35 mm

#### Note:

Overflow available at no additional charge.

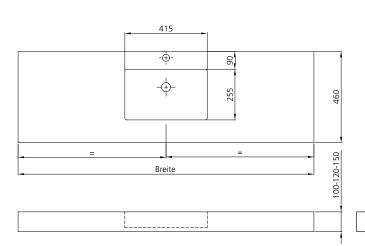

Two different washbasin heights:

Standard: 100 mm; with long basin: 120 mm





2 pieces mounting bracket already included in the scope of delivery

Description	Colour	Width	Article number	EUR
Washbasin mineral cast gelcoat, angular	White matt	500 mm	CONW2111110500	648,00
Washbasin mineral cast gelcoat, angular	White matt	700 mm	CONW2111110700	751,00
Washbasin mineral cast gelcoat, angular	White matt	800 mm	CONW2111110800	841,00
Washbasin mineral cast gelcoat, angular	White matt	900 mm	CONW2111110900	883,00
Washbasin mineral cast gelcoat, angular	White matt	1000 mm	CONW2111111000	902,00
Washbasin mineral cast gelcoat, angular	White matt	1100 mm	CONW2111111100	1.014,00
Washbasin mineral cast gelcoat, angular	White matt	1200 mm	CONW2111111200	1.110,00
Washbasin mineral cast gelcoat, angular	White matt	1400 mm	CONW2111111400	1.231,00
Washbasin mineral cast gelcoat, angular	White matt	1600 mm	CONW2111111600	1.351,00

## Washbasin mineral cast gelcoat, angular, anthracite matt, width 500-1600 mm



## Washbasin mineral cast gelcoat, angular, anthracite matt


- Angular basin
- With gelcoat coating
- Colour: anthracite matt
- · Without overflow
- With tap hole Ø 35 mm
- With 2 pieces mounting angle

#### Dimensions

Washbasin (WxHxD): 500-1600x100x460 mm Basin (WxHxD): 415x80x255 mm Tap hole: Ø 35 mm

#### Note:

Overflow available at no additional charge.

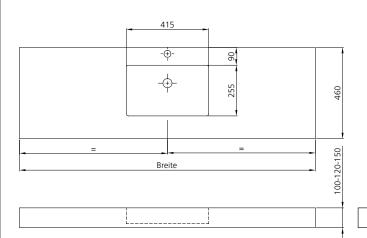

Two different washbasin heights:

Standard: 100 mm; with long basin: 120 mm





2 pieces mounting bracket already included in the scope of delivery

Description	Colour	Width	Article number	EUR
Washbasin mineral cast gelcoat, angular	Anthracite matt	500 mm	CONW2111210500	648,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	700 mm	CONW2111210700	751,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	800 mm	CONW2111210800	841,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	900 mm	CONW2111210900	883,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	1000 mm	CONW2111211000	902,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	1100 mm	CONW2111211100	1.014,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	1200 mm	CONW2111211200	1.110,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	1400 mm	CONW2111211400	1.231,00
Washbasin mineral cast gelcoat, angular	Anthracite matt	1600 mm	CONW2111211600	1.351,00

## Washbasin mineral cast gelcoat, angular, white/slate, width 500-1600 mm



## 

Two different washbasin heights:

Standard: 100 mm; with long basin: 120 mm





2 pieces mounting bracket already included in the scope of delivery

## Washbasin mineral cast gelcoat, angular, white/slate

- Angular basin
- With gelcoat coating
- Colour: white/slate
- · Without overflow
- With tap hole Ø 35 mm
- With 2 pieces mounting angle

#### Dimensions

Washbasin (WxHxD): 500-1600x100x460 mm Basin (WxHxD): 415x80x255 mm Tap hole: Ø 35 mm

#### Note:

Overflow available at no additional charge.



White with slate structure

Description	Colour	Width	Article number	EUR
Washbasin mineral cast gelcoat, angular	White/Slate	500 mm	CONW2111120500	648,00
Washbasin mineral cast gelcoat, angular	White/Slate	700 mm	CONW2111120700	751,00
Washbasin mineral cast gelcoat, angular	White/Slate	800 mm	CONW2111120800	841,00
Washbasin mineral cast gelcoat, angular	White/Slate	900 mm	CONW2111120900	883,00
Washbasin mineral cast gelcoat, angular	White/Slate	1000 mm	CONW2111121000	902,00
Washbasin mineral cast gelcoat, angular	White/Slate	1100 mm	CONW2111121100	1.014,00
Washbasin mineral cast gelcoat, angular	White/Slate	1200 mm	CONW2111121200	1.110,00
Washbasin mineral cast gelcoat, angular	White/Slate	1400 mm	CONW2111121400	1.231,00
Washbasin mineral cast gelcoat, angular	White/Slate	1600 mm	CONW2111121600	1.351,00

## Washbasin mineral cast gelcoat, angular, anthracite/slate, width 500-1600 mm



## Washbasin mineral cast gelcoat, angular, anthracite/slate


- Angular basin
- With gelcoat coating
- Colour: anthracite/slate
- · Without overflow
- With tap hole Ø 35 mm
- With 2 pieces mounting angle

#### Dimensions

Washbasin (WxHxD): 500-1600x100x460 mm Basin (WxHxD): 415x80x255 mm Tap hole: Ø 35 mm

#### Note:

Overflow available at no additional charge.

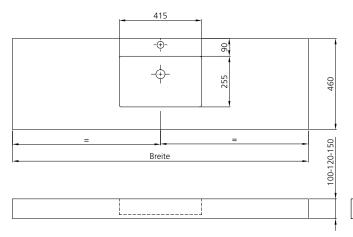

Two different washbasin heights:

Standard: 100 mm; with long basin: 120 mm






2 pieces mounting bracket already included in the scope of delivery



Anthracite with slate structure

Colour	Width	Article number	EUR
Anthracite/Slate	500 mm	CONW2111220500	648,00
Anthracite/Slate	700 mm	CONW2111220700	751,00
Anthracite/Slate	800 mm	CONW2111220800	841,00
Anthracite/Slate	900 mm	CONW2111220900	883,00
Anthracite/Slate	1000 mm	CONW2111221000	902,00
Anthracite/Slate	1100 mm	CONW2111221100	1.014,00
Anthracite/Slate	1200 mm	CONW2111221200	1.110,00
Anthracite/Slate	1400 mm	CONW2111221400	1.231,00
Anthracite/Slate	1600 mm	CONW2111221600	1.351,00
	Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate Anthracite/Slate	Anthracite/Slate 500 mm  Anthracite/Slate 700 mm  Anthracite/Slate 800 mm  Anthracite/Slate 900 mm  Anthracite/Slate 1000 mm  Anthracite/Slate 1100 mm  Anthracite/Slate 1200 mm  Anthracite/Slate 1400 mm	Anthracite/Slate         500 mm         CONW2111220500           Anthracite/Slate         700 mm         CONW2111220700           Anthracite/Slate         800 mm         CONW2111220800           Anthracite/Slate         900 mm         CONW2111220900           Anthracite/Slate         1000 mm         CONW2111221000           Anthracite/Slate         1100 mm         CONW2111221100           Anthracite/Slate         1200 mm         CONW2111221200           Anthracite/Slate         1400 mm         CONW2111221400

## Additional charges for optional extras

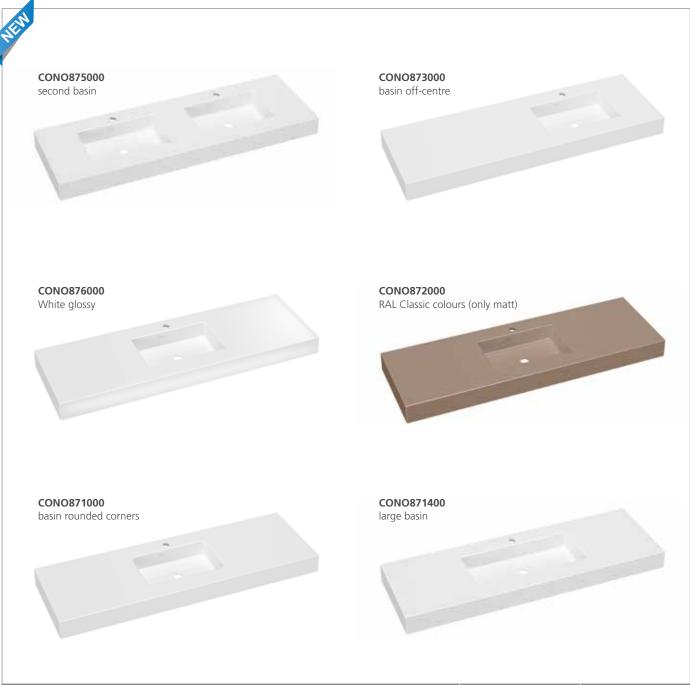


Description	Article number	EUR
Surcharge for second basin; minimum width of wash basin: 1200 mm	CONO875000	173,00
Surcharge for basin placed off-centre	CONO873000	77,00
Surcharge for colour White glossy	CONO876000	148,00
Surcharge for RAL colour according to RAL card from 1 piece washbasin (only matt)	CONO872000	148,00
Surcharge for basin rounded corners 420x300 mm; minimum depth wash basin: 460 mm	CONO871000	77,00
Surcharge for extra large basin: min. 1000 mm basin sizes (WxHxD): 600x100x300 mm or 800x100x300 mm	CONO871400	173,00

## Additional charges for optional extras



Description	Article number	EUR
Surcharge for integrated towel rail; dimensions: 400x40 mm	CONO874000	77,00
Surcharge for inserted towel rail, chrome; length: 350 mm	CONO877000	77,00
Surcharge per meter for hygienic edge; dimensions (HxD): 50x19 mm	CONO871200	87,00
Surcharge for special width or special depth; each at least 400 mm	CONO871300	148,00
Surcharge per 10 cm extra width to next larger width in 10 cm steps	CONO870010	77,00
Surcharge for mounting brackets per piece; Note: 2 mounting brackets are already included in the scope of delivery of the mineral cast gelcoat washbasin.  Additional mounting brackets may be necessary for special dimensions.  Recommended minimum distance 1000 mm.	CONO870001	43,00

## Countertop washbasin with self-supporting siphon

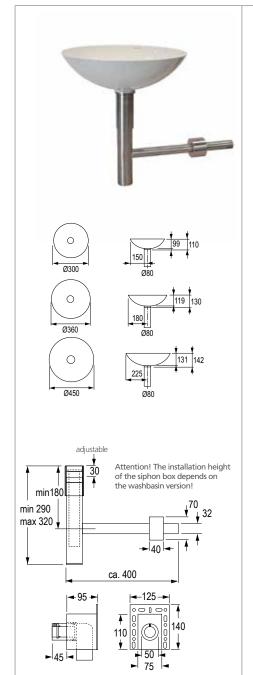

#### Countertop washbasin, white, with self-supporting siphon

Ø 300 mm

Dimension (ØxD): 300x100 mm Net weight: 2,30 kg

Faucet note\*: Optimal impact point approx.

80 – 110 mm

from the rear edge of basin

Ø 360 mm

Dimension (ØxD): 360x125 mm Net weight: 3,30 kg

Faucet note\*: Optimal impact point approx.

80 – 110 mm

from the rear edge of basin

Ø 450 mm

Dimension (ØxD): 450x130 mm Net weight: 4,50 kg

Faucet note\*: Optimal impact point approx.

130 – 180 mm

from the rear edge of basin

Material: Enamelled steel

Colour basin: White, easy-care surface white
Colour siphon: Stainless steel matt or chromed
Standard equipment: Without tap hole, without overflow

Description	Dimension	Colour siphon	Article number	EUR
Countertop washbasin, with self-supporting siphon	Ø 300 mm	Chromed	CONW6003500	1.310,00
Countertop washbasin, with self-supporting siphon	Ø 300 mm	Stainless steel matt	tainless steel matt CONW2003500	
Countertop washbasin, with self-supporting siphon	Ø 360 mm	Chromed	CONW6003501	1.360,00
Countertop washbasin, with self-supporting siphon	Ø 360 mm	Stainless steel matt	CONW2003501	1.431,00
Countertop washbasin, with self-supporting siphon	Ø 450 mm	Chromed	CONW6003502	1.463,00
Countertop washbasin, with self-supporting siphon	Ø 450 mm	Stainless steel matt	CONW2003502	1.533,00

 $<sup>{}^\</sup>star \text{Optimum impact on the basin trough with faucets with vertical spout (angle of impact 90°) and with built-in aerator}$ 

## Self-supporting siphon




#### Self-supporting siphon

Self-supporting siphon with wall box and special waste without storage function


- Adjustable height and length
- Delivery without basin

Load capacity up to 150 kg!

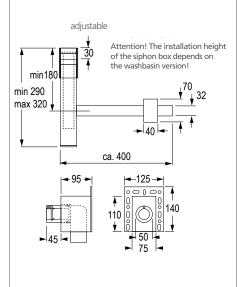

Description	Material / Colour	Article number	EUR
Self-supporting siphon	Chromed brass	CONT09300010000	890,00
	Stainless steel matt	CONT09200010000	1.230,00



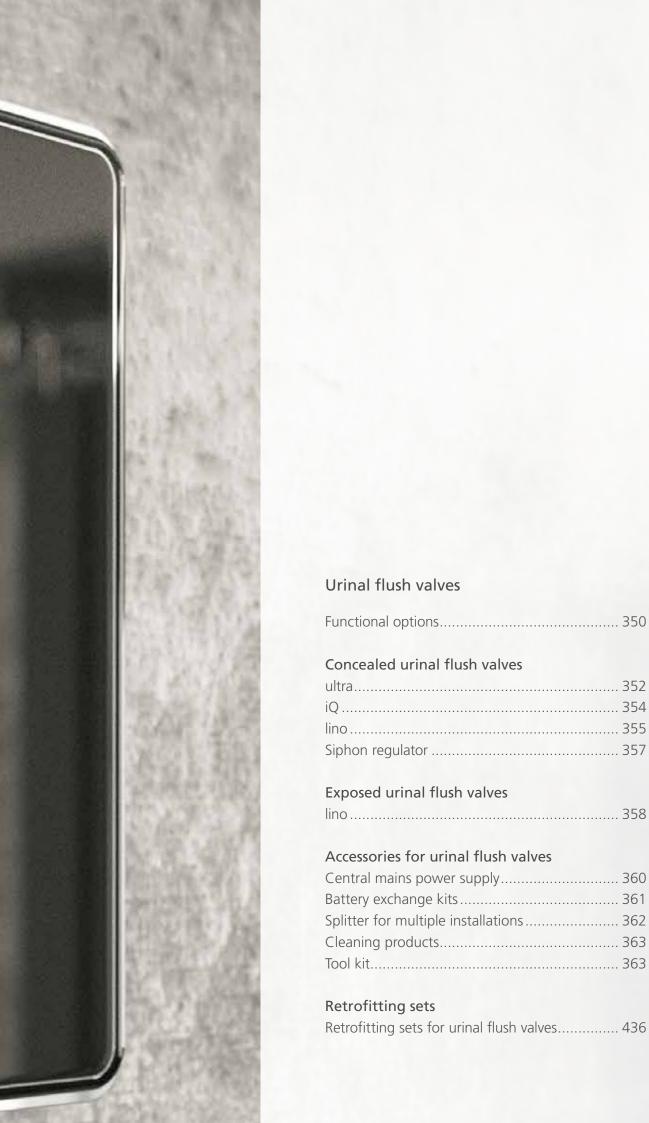

# Functional options for urinal flush valves

Overview urinal flush valves (not all features combinable)

	Water flow	v actuation	Resource-saving functions
Urinal flush valves	Self-closing function, electronic	IR sensor	Adjustable water flow time
CONCEALED URINAL FLUSH VALVES			
ultra	•	•	•
iQ	•	•	•
lino	•	•	•
EXPOSED URINAL FLUSH VALVES			
lino	•	•	•
SIPHON REGULATOR			
\$10	•	•	•

**FUNCTIONAL CHARACTERISTICS** 



	Service functions								Hygiene	e and safet	y functions	
Temporary-off - cleaning stop	Short-on - manual flush	Stadium mode - 1 flush per minute	Overflow protection	Self-adapting sensor sensitivity	Function key Click	Function key Touch	VARIOconnect	Service APP	Touchless operation	Touchless operation	Service APP	CNX Water Management System
•	•	•		•		•	•	•	•	•	•	•
•	•	•		•		•	•	•	•	•	•	•
•	•	•		•		•	•	•	•	•	•	•
•	•	•		•	•				•	•	<b>\$</b>	
			•						•	•		

 $<sup>\</sup>bullet$  : Standard feature  $| \>\> \diamondsuit$  : Service APP, only possible in conjunction with BLE Converter

#### ultra urinal flush valve U18














## ultra urinal flush valve U18, with IR sensor, white/chromed - final installation set

Touchless, electronically controlled urinal flush valve for concealed installation:

- · Front plate made of glass, white
- Double IR sensors (with automatic setting feature!), microprocessor
- Reliable solenoid valve (minimal level of water pressure surge)
- Dynamic sensor: constantly adjusts the optimum range
- Temporary-off (cleaning) and short-on (manual flush) activatable with Touch
- Flush time and sensor sensitivity adjustable with Touch
- 24- or 48-hour hygienic flush and pre-rinse activatable with Touch
- Variable installation in combination with urinal shell set U2L or U3L (not included)
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - standard; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single- and multiple power supply and data connection (Connection to CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 20 l/min / 5,3 gpm (3 bar)

Filter: 0,5 mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology Flush time: Pre-set approx. 7 s (adjustable with Touch 2-30 s)

Temporary-off (approx.): 2 min. (fixed)
Residence time (approx.): 10 s (fixed)
Engineering standards: DIN EN 200; C€

**Necessary accessory:** 220.022.00 urinal shell set U3L or

220.025.00 urinal shell set U2L

**Note:** When integrated into the CNX Water Management System,

the CNX Converter  $6\,\mathrm{V}$  must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

Power supply			Power supply Colour		
	Battery	8	Front plate: white glass Frame: chromed	260.000.31	513,00
	Concealed mains power supply	8	Front plate: white glass Frame: chromed	260.010.31	513,00
ec e	VARIOconnect	8	Front plate: white glass Frame: chromed	260.016.31	467,00

#### ultra urinal flush valve U18
















ultra urinal flush valve U18, with IR sensor, black/chromed - final installation set

Touchless, electronically controlled urinal flush valve for concealed installation:

- Front plate made of glass, black
- Double IR sensors (with automatic setting feature!), microprocessor
- Reliable solenoid valve (minimal level of water pressure surge)
- Dynamic sensor: constantly adjusts the optimum range
- Temporary-off (cleaning) and short-on (manual flush) activatable with Touch
   Flush time and sensor sensitivity adjustable with Touch
- 24- or 48-hour hygienic flush and pre-rinse activatable with Touch
- Variable installation in combination with urinal shell set U2L or U3L (not included)
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - standard; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single- and multiple power supply and data connection (Connection to CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 20 l/min / 5,3 gpm (3 bar) Filter: 0,5 mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology
Flush time: Pre-set approx. 7 s (adjustable with Touch 2-30 s)

Temporary-off (approx.): 2 min. (fixed)
Residence time (approx.): 10 s (fixed)
Engineering standards: DIN EN 200; CC

**Necessary accessory:** 220.022.00 urinal shell set U3L or 220.025.00 urinal shell set U2L

220.025.00 ufffal Sfiell Set OZL

**Note:** When integrated into the CNX Water Management System,

the CNX Converter  $6\,\mathrm{V}$  must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.

power supply			power supply colour			
	Battery	€°	Front plate: black glass Frame: chromed	260.000.71	513,00	
	Concealed mains power supply	8	Front plate: black glass Frame: chromed	260.010.71	513,00	
€°	VARIOconnect	&	Front plate: black glass Frame: chromed	260.016.71	467,00	

### iQ urinal flush valve U28
















## iQ urinal flush valve U28, with IR sensor, stainless steel/chromed - final installation set

Touchless, electronically controlled urinal flush valve for concealed installation:

- Sturdy front plate made of brushed stainless steel
- Double infrared sensors (with automatic setting feature!), microprocessor
- Reliable solenoid valve (minimal level of water pressure surge)
- Dynamic sensor: constantly adjusts the optimum range
- Temporary-off (cleaning) and short-on (manual flush) activatable with Touch
- Flush time and sensor sensitivity adjustable with Touch
- 24- or 48-hour hygienic flush and pre-rinse activatable with Touch
- Variable installation in combination with urinal shell set U2L or U3L (not included)
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

Battery: 6 V Lithium CRP2 - standard; life time up to 4 years Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V

VARIOconnect: For single- and multiple power supply and data connection (Connection to CNX and Service APP - see accessories)

Operating pressure: 0,3-10 ba

Flow rate (approx.): 20 l/min / 5,3 gpm (3 bar)

Filter: 0,5 mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology
Flush time: Pre-set approx. 7 sec. (adjustable with Touch 2-30 sec.)

Temporary-off (approx.): 2 min. (fixed)

Residence time (approx.): 10 sec. (fixed) Engineering standards: DIN EN 200; C€

**Necessary accessory:** 220.022.00 urinal shell set U3L or

220.025.00 urinal shell set U2L

**Note:** When integrated into the CNX Water Management System,

the CNX Converter 6V must be ordered separately.


When using the Service APP, the BLE Converter must be ordered  $\,$ 

separately.

Power supply			Power supply Colour			
	Battery	<b>∞</b> C	Front plate: brushed stainless steel Frame: chromed	201.000.01	459,00	
	Concealed mains power supply	<b>∞</b> €0	Front plate: brushed stainless steel Frame: chromed	201.010.01	459,00	
€°	VARIOconnect	<b>∞</b> 0	Front plate: brushed stainless steel Frame: chromed	201.016.01	409,00	

#### lino urinal flush valve U10





Touchless, electronically controlled urinal flush valve for concealed installation:

- · Sturdy front plate made of metal, chromed
- Infrared sensor (with automatic setting feature!), microprocessor
- Reliable solenoid valve (extremely minimal level of water pressure surge)
- Dynamic sensor: constantly adjusts the optimum of range
- Temporary-off (cleaning) and short-on (manual flush) activatable with Click
- Flush time and sensor sensitivity adjustable with Click
- 24- or 48-hour hygienic flush and pre-rinse activatable with Click
- Variable installation in combination with urinal shell set U2L or U3L (not included)
- Stop valve and filter in concealed installation box
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions

6V Lithium CRP2 - standard; life time up to 4 years Battery: Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6V

VARIOconnect: For single- and multiple power supply and data connection (Connection to CNX and Service APP - see accessories)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 20 l/min / 5,3 gpm (3 bar) Filter: 0,5 mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology

Flush time: Pre-set approx. 7 sec. (adjustable with Touch 2-30 sec.)

Temporary-off (approx.): 2 min. (fixed) Residence time (approx.): 10 s (fixed) Engineering standards: DIN EN 200: **C€** 

220.022.00 urinal shell set U3L or **Necessary accessory:** 220.025.00 urinal shell set U2L

When integrated into the CNX Water Management System, Note:

the CNX Converter 6V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered

separately.


















	Power supply		Colour	Article number	EUR
	Datton	£	Front plate: chromed / Window: white	220.000.43	459,00
	Battery	0	Front plate: white / Window: white	220.000.33	459,00
	Concealed mains power	£	Front plate: chromed / Window: white	220.010.43	459,00
	supply	0	Front plate: white / Window: white	220.010.33	459,00
_0	VARIOconnect	&	Front plate: chromed / Window: white	220.016.43	409,00
VARIOCONNECT	0	Front plate: white / Window: white	220.016.33	409,00	

# Accessories for concealed urinal flush valves U18, U28, U10

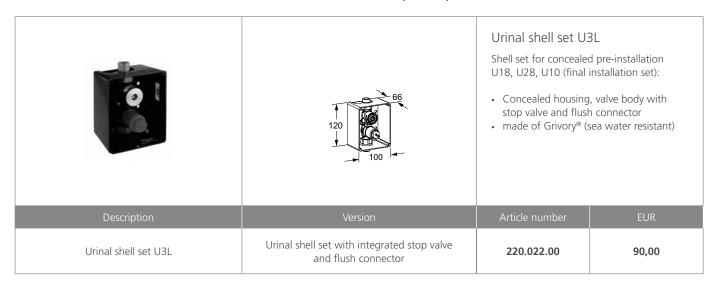

# Accessories for siphon regulator \$10

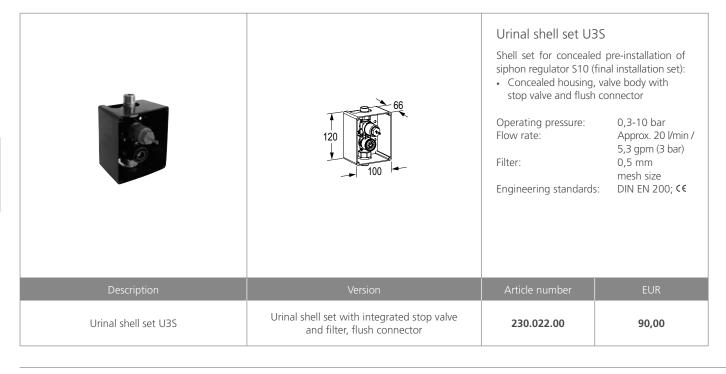

## urinal flush control S10, siphon regulator



#### urinal flush control S10, siphon regulator - final installation set

Touchless, invisible and inaccessible electronically controlled urinal flush control for mounting behind the urinal (not included).

Consisting of electronics and siphon:

- Siphon with outlet DN50 for flush volume (urinal): 2 8 l/min (article number 230.010.00)
- Invisible installation behind the urinal
- · Measurements at the siphon, no contaminations of the sensor
- · Automatic adjustment to conditions at place of use
- All functions pre-set
- Flush time adjustable directly at electronic module
- Automatic flush: 24 hours after last flush
- Overflow protection: no flushing at fully and partial blockage
- Stadium operation: frequent usage leads up to 1 flush per minute
- Regular flushing after use within 10 sec.
- Stop valve, filter pre-mounted in shell set U3S
- 1x solenoid valve 6 V/DC inlcuded
- Variable installation in combination with urinal shell set U3S or U2S (not included)
- No use for urinals made of stainless steel

Mains supply: Plug-in transformer 110 - 240V 50/60Hz / 6V

(transformer integrated in electronic module)

Release time (approx.): 10 sec. after usage

Flush time: Pre-set approx. 7 sec. (adjustable 1 - 14 s)

Operating pressure: 0,3-10 bar

Flow rate (approx.): 20 l/min / 5,3 gpm (3 bar)

Engineering standards: DIN EN 200; €€

**Necessary accessory:** 230.022.00 urinal shell set U3S or

230.025.00 urinal shell set U2S

This photo shows: urinal with urinal control \$10



Description		Model	Article number	EUR
Mains supply	Ø,	S10 siphon regulator with 2 - 8l siphon	230.010.00	442,00

# lino exposed urinal flush valve U60



#### lino exposed urinal flush valve U60, with IR sensor, chromed

Touchless, electronically controlled urinal flush valve for exposed installation:

- · Sturdy brass housing
- Digital microelectronics with processor (water-proof)
- Dynamic IR sensor: constantly determines the optimum range
- Reliable solenoid valve (minimal level of water pressure surge)
- Temporary-off (cleaning) and short-on (manual flush) activatable with Click
- Flush time and sensor sensitivity adjustable with Click
- 24-hour hygienic flush and pre-rinse activatable with Click
- Stop valve with filter and rosette
- Rinse pipe and cover rosette (185 mm) with urinal connector

Battery: 6 V Lithium CRP2 - standard; life time up to 4 years
Solar: Photovoltaic cells with 6 V Lithium CRP2 (support batteries)

commercial life-time up to 6 years

Operating pressure: 0,3-10 bar


Flow rate (approx.): 25 l/min / 6,6 gpm(3 bar)
Filter: 0,5 mm mesh size
Rinse pipe: Bore 18 mm

Sensor-sensitivity: Automatic self-adapting sensor technology Residence time: Approx. 10 s (fixed)

Flush time: Pre-set approx. 7 sec. (adjustable with remote control 2-30 sec.)


Temporary-off (approx.): 2 min. (fixed)
Residence time (approx.): 10 s (fixed)
Engineering standards: DIN EN 200; C€





Power supply	Colour	Article number	EUR
Battery	Chromed	220.100.11	391,00
-ờ- Solar	Chromed	220.108.11	422,00


# Accessories for lino urinal flush valve U60



Cranked flush pipe for lino exposed urinal flush valve U60

- Replacement of straight infeed tube at ports with offset
- Length: approx. 300 mm


Description	Offset Article number EUR		EUR
Cranked infeed tube for lino exposed urinal flush valve U60	10 mm	550.011.11	23,00
	20 mm	550.012.11	24,00
	30 mm	550.013.11	25,00
	40 mm	550.014.11	26,00
	50 mm	550.015.11	28,00



Extra long infeed tube for lino exposed urinal flush valve U60

• Length: ca. 500 mm

Description	Article number	EUR
Infeed tube	550.020.11	30,00



Spray-head for exposed lino urinal flush valve U60

- For rinsing of urinal walls
- Length: approx. 50 mm

Description	Article number	EUR
Spray-head for exposed urinal flush valve	550.021.00	26,00

## Central mains power supplies for multiple installation



#### Concealed central power supply, for up to 30 units

#### Suitable for:

- All lavatory faucets with VARIOconnect for multiple installations up to 30 units (except lumino L10i and L10c)
- Urinal flush valves with VARIOconnect (U10, U18, U28)
- Multiple installation bypass for lino flush-mounted shower faucets up to 30 units
- Exclusively for use with flush-mounted splitters 550.042.00 or 550.43.00 or 550.044.00

#### Consisting of:

- Concealed mains power supply 110-240 V / 12 V
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves



Description	Installation type	Voltage	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 30 units	110-240 V / 12 V	550.041.00	128,00



#### Concealed central mains power supply, for up to 12 units

#### Suitable for:

- All lavatory faucets with VARIOconnect in multiple installations up to 12 units (except lumino L10i and L10c)
- Shower panel CONPRIMUS, lavatory faucet lino PRIMUS upright faucet L40 (single installation)
- Urinal flush valves with VARIOconnect (U10, U18, U28) up to 12 units
- Multiple installation bypass for lino flush-mounted shower faucets up to 12 units
- Exclusively for use with flush-mounted splitters 550.042.00 or 550.43.00 or 550.044.00

- Concealed mains power supply 110-240 V / 12 V
- · Concealed installation box with white cover
- Installation cable 3000 mm with plug connector for faucets/flush valves



Description	Installation type	Voltage	Article number	EUR
Concealed central mains power supply, with flush-mounted outlet	up to 12 units	110-240 V / 12 V	550.045.00	88,00

# Battery exchange kits



#### Battery exchange kit 2CR5

For following models: A10, A20, A30, U20, U40, U50, U51

#### Consisting of:

• Battery (6 V Lithium 2CR5 resp. DL 245)

Description	Article number	EUR
Battery exchange kit 2CR5	CONZ8955003	16,00



#### Battery exchange kit CRP2


For following models: 2in1, A50, D10, G10, G20, G30, K10, K20, K30, L10, L20, L30, L15, L15P, L25, L25P, M10, M20, U10, U18, U28, U60, U55, W10, W30, W35, W45, WV10, WV20, H10.

#### Lieferumfang:

• Battery (6 V Lithium CRP2 resp. DL 223 A)

Description	Article number	EUR
Battery exchange kit CRP2	CONZ8955004	16,00

# Installation cable for multiple installations




Installation cable for multiple installations, 300 mm / 1200 mm / 3200 mm Sheathed with additional protective insulation

#### Consisting of:

- 1x 8 mm plug, water resistant (female)
- 1x 8 mm plug, water resistant (male)

Description	Installations type	Length (x)	Article number	EUR
Installation cable	For multiple installations	300 mm	550.037.03	7,00
	For multiple installations	1200 mm	550.037.12	15,00
	For multiple installations	3200 mm	550.037.32	19,00



Installation cable for multiple installations with open wires, 3000 mm Sheathed with additional protective insulation

- 1x Plug 8 mm (female)
- 1x Tin-plated wires

Description	Installations type	Length (x)	Article number	EUR
Installation cable with open wires	For multiple installations	3000 mm	550.046.30	16,00

# Splitter for multiple installations of units with VARIOconnect



#### Concealed splitter for multiple installations


#### Suitable for:

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- One splitter set required per connected faucet/urinal flush valve and bypass solenoid valve

#### Consisting of:

- Splitter for voltage range 12 VAC/VDC-28 VAC/VDC
- 3 Terminals (60 mm)

Description	Installation type	Article number	EUR
Concealed splitter set	for multiple installations	550.044.00	45,00



#### Concealed splitter for multiple installations

#### Suitable for:

- All lavatory faucets (except lumino L10i and L10c), flush-mounted shower faucets and urinal flush valves U10, U18, U28 with VARIOconnect
- Exclusively for use with flush-mounted central power supply units for multiple installations (550.041.00 or 550.045.00)
- One splitter set required per connected faucet/urinal flush valve and bypass solenoid valve

- Splitter for voltage range 12 VAC/VDC-28 VAC/VDC
- 3 Terminals (60 mm)
- Installation cable with length (x) and plug-in connector for faucets

Description	Installation type	Length (x)	Article number	EUR
Concealed splitter set	for multiple installation	1200 mm	550.044.12	48,00
	for multiple installation	3200 mm	550.044.32	52,00

# Cleaning products



#### Microfiber cloth (grey)

Soft microfiber cloth for professional use. With velvety surface for slightly textured, smooth and delicate surfaces, very good for cleaning stainless steel, chromed, aluminium, faucets and lacquered surface, washable up to 95  $^{\circ}$ C.

Description	Dimension	Article number	EUR
Microfiber cloth grey	Approx. 400x400 mm	CONO690200	16,00



#### Cleaner BR75

Swimming pool and sanitary cleaners for all public and private swimming pools, toilets (urinals), showers and bath rooms, acid-resistant tiles and sanitary porcelain, as well as for removal of cement veils.

Description	Filling quantity	Article number	EUR
Cleaner BR75	1000 ml	CONO690100	41,00

#### Tool kit




#### Tool kit for service and assembly of CONTI+ faucets

- 1 Hook wrench 38 mm
- 1 Allen key SW 3x36x16,5
- 1 Face spanner adjustable
- 1 Face spanner-screwdriver with handle
- 1 Hexagon key SW 2x100
- 1 Hexagon key SW 2,5x100
- 1 Hexagon key SW 3x100
- 1 Hexagon key SW 6x160
- 1 Allen key SW 4x140x28
- 1 Microfiber cloth
- 1 Tool-belt bag

Description	Colour	Article number	EUR
Tool kit for service and assembly of CONTI+ faucets	Black/Blue	CONO690300	155,00

# Retrofitting set urinal flush valve



#### Retrofitting set urinal flush valve 55 - 68

Universal equipment on electronic touchless CONTI+ sensor urinal flush valves U18 and U28 of mechanical pressure washers with water lengths 55 or 68 mm

Universal cover plate for further use of the existing raw mounting sets for wall installation

#### Consisting of

Adapter: brass, 23 mm, O-ring seal, water section, thread IG / AG 3/4
Cover plate, stainless steel 1.4301, brushed surface, 250x250 mm, with sealing, mounting on site


Operating pressure: 0,3-10 bar

Flow rate: 20 l/min / 5,3 gpm (3 bar)

Connection: Rp 3/4

Protection class: IP68 (electronic components)





Description	Colour	Article number	EUR
Retrofitting set urinal flush valve 55 - 68	Stainless steel	CONS11551000000	211,00








# Sanitary equipment

Design series SteelTec
Hand dryers368Paper towel dispensers369Dispensers soap   disinfectant370Toilet paper holders371Hygiene /waste bins380Diaper changing table376Paper roll holders376
Design series BJÖRKHand dryers378Paper dispenser379Dispensers soap   disinfectant380Toilet paper holders382Hygiene /waste bins383Diaper changing tables384Paper towel dispensers385
Accessories SteelTec   BJÖRKI Floor/Table stands
Design series TAP Hand dryers
Stainless steel equipment         Hand and hair dryers       392         Hand dryers       393         Hair dryer       396         Hygiene /waste bins       397         Hygienic bag dispensers       399         Paper towel dispensers       400         Diaper changing table       401         Dispensers soap   disinfectant       404         Toilet accessories       409         Wall mirrors       411         Consumable supplies       413         Wash basins       415         Wash troughs       420         Laboratory sink       423         Bucket sinks       424         Urinal       428

# SteelTec hand dryer DESIGN





#### SteelTec hand dryer MINI DESIGN

Touchless hand dryer with housing made of 1,5 mm brushed stainless steel, IR sensor and electronic timer.

- · For wall mounting
- Drying cycle: approx. 30 sec.
- Almost maintenance-free
- With induction motor
- Adjustable sensor range
- With lock for effective protection against vandalism
- Air velocity adjustable
- Additionally available in all RAL Classic colours


6 kg Weight:

Dimensions (WxHxD): 228x339x156 mm Nominal capacity: 1800 W Noise level: 64 dBa

Outlet temperature (max.): 55 °C Protection class:

Description	Version	Material	Article number	EUR
SteelTec hand dryer MINI DESIGN	With IR sensor	Stainless steel matt	CONT21200810281	763,00





#### SteelTec hand dryer TURBO DESIGN

Touchless hand dryer with housing made of 1,5 mm brushed stainless steel, IR sensor and electronic timer.

- For wall mounting
- Drying cycle: approx. 10-15 sec.
- Powerful commutator motor
- Adjustable sensor range
- · With lock for effective protection against vandalism
- Air velocity adjustable
- Additionally available in all RAL Classic colours


Weight: 6,9 kg


Dimensions (WxHxD): 200x420x198 mm 1600 W Nominal capacity: Noise level: 78 dBa Outlet temperature (max.): 60 °C

Protection class:

Description	Version	Material / Colour	Article number	EUR
SteelTec hand dryer TURBO DESIGN	With IR sensor	Stainless steel matt	CONT21200810288	1.047,00

# SteelTec hand dryer DESIGN

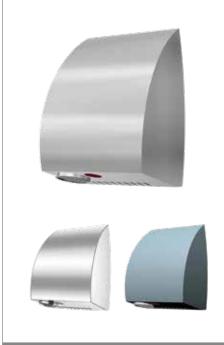



#### SteelTec hand dryer AE DESIGN

Touchless hand dryer with housing made of 1,5 mm brushed stainless steel, IR sensor and electronic timer.

- · For wall mounting
- Drying cycle: approx. 20-25 sec.
- · Almost maintenance-free
- With induction motor
- 90% recyclable
- · Air velocity adjustable

Weight: 7,65 kg
Dimensions (WxHxD): 304x380x180 mm
Nominal capacity: 2360 W
Noise level: 62 dBa


Noise level: 62 dBa
Outlet temperature (max.): 65 °C
Protection class: IP23

\*Note: Gloss level to be specified

Description	Version	Material / Colour	Article number	EUR
SteelTec hand dryer AE DESIGN	With IR sensor	Stainless steel matt	CONT21200810280	1.370,00
	With IR sensor	Stainless steel polished	CONT21100810290	1.521,00
	With IR sensor	Stainless steel, RAL	CONT21900810291	1.553,00

# SteelTec paper towel dispenser DESIGN





# SteelTec paper towel dispenser DESIGN

Paper towel dispenser with housing made of 1,5 mm brushed stainless steel. 2-ply Z/C-fold paper towels (max. 95x250 mm)

- · For wall mounting
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours


Weight: 5 kg

Dimensions (WxHxD): 267x536x111 mm Opened (WxHxD): 267x536x460 mm Filling capacity: 400 pcs.

Description	Filling capacity	Material	Article number	EUR
SteelTec Paper towel dispenser	400 pcs.	Stainless steel matt	CONT16200710286	334,00

## SteelTec dispenser DESIGN





**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

#### SteelTec dispenser DESIGN

Touchless dispenser for liquid soap/disinfectant or foam soap made of 1.5 mm brushed stainless steel AISI 304.

- · For wall mounting
- · Refillable container
- Power connection possible with external transformer\*
- Intelligent automatically sensor range
- LED light for power indicator
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours


Weight: 2,5 kg

Dimensions (WxHxD): 120x339x126 mm Opened (WxHxD): 120x340x350 mm

Suitable table and floor stands starting on page 386.

Description	Version	Filling capacity	Article number	EUR
SteelTec dispenser DESIGN	Liquid soap/ disinfectant	950 ml	CONT17200810282	403,00
	Foam soap	800 ml	CONT17200810295	446,00

# 5



**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

#### SteelTec dispenser DESIGN

Manual dispenser for liquid soap, disinfectant or foam soap made of 1.5 mm brushed stainless steel AISI 304.

- For wall mounting
- Manually operated dispenser
- · 1000-1200 dosages
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours

Weight: 2,75 kg


Dimensions (WxHxD): 120x367x164 mm Opened (WxHxD): 120x367x363 mm


Filling capacity: 1200 ml

2_	
5	
	SteelTec dispenser DESIGN

Version	Material	Article number	EUR
Liquid soap	Stainless steel matt	CONT17200710296	513,00
Disinfectant	Stainless steel matt	CONT17200710297	548,00
Foam soap	Stainless steel matt	CONT17200710298	552,00


# SteelTec toilet paper holder DESIGN

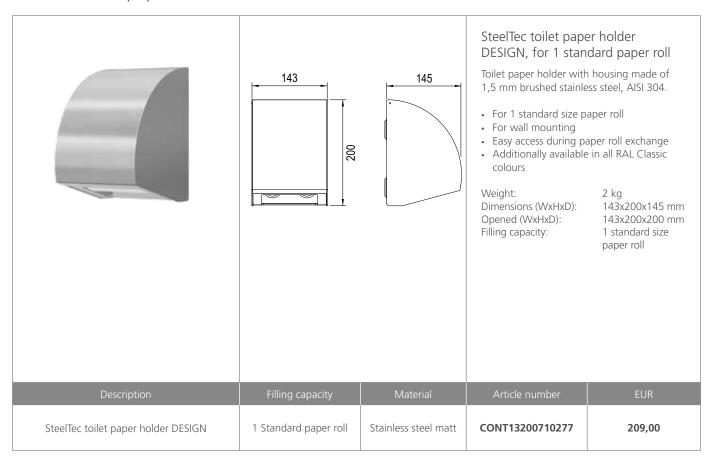

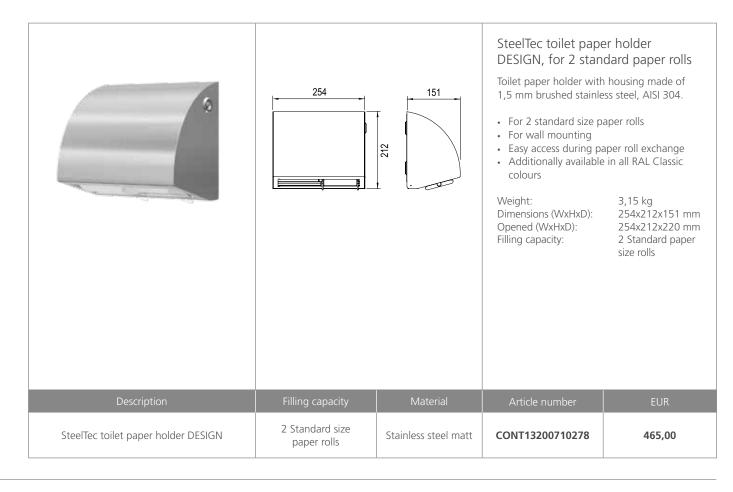

# SteelTec toilet paper holder DESIGN





#### SteelTec toilet paper holder DESIGN

Toilet paper holder with housing made of 1,5 mm brushed stainless steel, AISI 304.

- · For 4 standard size paper rolls
- For wall mounting
- With lock for effective protection against vandalism
- Easy access during paper roll exchange
- Additionally available in all RAL Classic colours

Weight: 8 kg

Dimensions (WxHxD): 338x460x144 mm
Opened (WxHxD): 338x460x435 mm
Filling capacity: 4 standard size paper rolls

Article number	FLIR

SteelTec Toilet paper holder DESIGN


4 standard size paper rolls

Stainless steel matt

CONT13200710285

817,00





# SteelTec WC toilet paper holder DESIGN

Toilet paper holder with housing made of 1,5 mm brushed stainless steel, AISI 304.

- For 1 maxi toilet paper roll
- For wall mounting
- With lock for effective protection against vandalism
- Easy access during paper roll exchange
- Additionally available in all RAL Classic colours


Weight: 6,5 kg

Dimensions (WxHxD): 338x460x144 mm Opened (WxHxD): 338x460x435 mm Filling capacity: 1 maxi paper roll

Description	Filling capacity	Material	Article number	EUR
SteelTec toilet paper holder DESIGN	1 maxi toilet paper roll	Stainless steel matt	CONT13200710287	767,00

# SteelTec toilet paper holder DESIGN





SteelTec toilet paper holder DESIGN, for 1 maxi and 1 standard size paper roll

Toilet paper holder with housing made of 1,5 mm brushed stainless steel, AISI 304

- For wall mounting
- Economical model with minimal paper
  waste
- With practical inspection hole for easy control of the amount of paper
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours

Weight: 9,9 kg


Dimensions (WxHxD): Opened (WxHxD): Filling capacity: 375x535x144 mm 375x535x506 mm 1 maxi paper roll

+ 1 standard size paper roll

Description	Filling capacity	Material	Article number	EUR
SteelTec toilet paper holder DESIGN	1 maxi paper roll + 1 standard size paper roll	Stainless steel matt	CONT13200710289	989,00

## SteelTec hygiene bin DESIGN





#### SteelTec hygiene bin DESIGN

Hygiene bin with housing made of 1,5 mm brushed stainless steel, AISI 304

- · For wall mounting
- With hygienic sluice insertion flap
- · With fully welded, stainless inner bucket
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours


Weight: 7 kg

Dimensions (WxHxD): 279x482x139 mm Opened (WxHxD): 279x482x350 mm Filling capacity: 7 I

Description	Version	Filling capacity	Article number	EUR
SteelTec hygiene bin DESIGN	With hygienic sluice insertion flap	7	CONT18270710283	793,00

### SteelTec waste bin DESIGN





#### SteelTec waste bin DESIGN

Waste bin with housing made of 1,5 mm brushed stainless steel, AISI 304.

- For wall mounting
- With self-closing swing lock
- With fully welded, stainless inner bucket
- Easy opening / closing with two shock absorbers
- Lock for effective protection against vandalism
- Additionally available in all RAL Classic colours

Weight: 17,2 kg


Dimensions (WxHxD): 380x700x254 mm Opened (WxHxD): 380x700x460 mm

Filling capacity: 30 l

Description	Version	Filling capacity	Article number	EUR
SteelTec waste bin DESIGN	With self-closing swing lock	30 l	CONT18270710284	1.264,00

#### SteelTec waste bin DESIGN





#### SteelTec waste bin DESIGN

Waste bin and sanitary box made of 1,5 mm brushed stainless steel, AISI 304

- · For wall mounting
- With hinged lid
- With fully welded, stainless inner bucket
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours

Weight:
Dimensions (WxHxD):
Opened (WxHxD):


8,1 kg 338x460x144 mm 338x460x320 mm

ling capacity: 11 l

IIIIIII	capacity.		1	1	1

Description	Version	Filling capacity	Article number	EUR
SteelTec waste bin DESIGN	With hinged lid	11	CONT18270710279	787,00





#### SteelTec waste bin DESIGN

Waste bin and sanitary box made of 1,5 mm brushed stainless steel, AISI 304

- For wall mounting
- With self-closing swing lock
- With fully welded, stainless inner bucket
- With lock for effective protection against vandalism
- Additionally available in all RAL Classic colours

Weight: 8,6 kg


Dimensions (WxHxD): 338x460x144mm Opened (WxHxD): 338x460x320 mm

Filling capacity: 12 l

Description	Version	Filling capacity	Article number	EUR
SteelTec waste bin DESIGN	With self-closing swing lock	12	CONT18270710294	836,00

## SteelTec diaper changing table





#### SteelTec diaper changing table

Wall-mounted safety diaper changing table with belt. Brackets for wall mounting and end flanges: brushed stainless steel. Available as standard version with white aluminium profile.

- For wall mounting
- Made of cleaning-friendly materials
- · Can be folded up
- Strong, safety strap and rounded edges
- Additionally available in all RAL Classic colours and coated with different prints
- Can be combined with matching paper roll holder
- Without fastening material


Weight: 17,1 kg
Closed (WxHxD): 967x782x100 mm
Opened (WxHxD): 967x782x626 mm
Winding surface (L): 790 mm
W (without brackets): 798 mm
W (incl. brackets): 967 mm
Load capacity: Up to 400 kg


Suitable for:

CONT13200710656 Paper holder CONT13200710655 Paper holder

Description	Version	Material	Article number	EUR
SteelTec diaper changing table	With safety strap	White-painted aluminium	CONT25578710659	2.726,00
	Without safety strap	White-painted aluminium	CONT25578710660	2.726,00

# SteelTec paper holder for diaper changing table

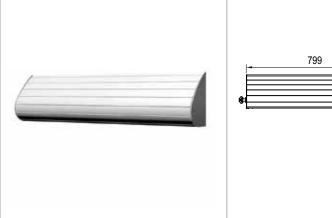



# SteelTec paper holder for diaper changing table

Toilet paper holder for diaper changing table. Available as standard version with white aluminium profile.

- For wall mounting
- Hygienic solution
- Very sturdy model with safety locks
- Holds 700x100 mm paper rolls
- Additionally available in all RAL Classic colours
- Can be combined with diaper changing table

Weight: 3,5 kg


Dimensions (WxHxD): 799x185x109 mm

Description	Material	Article number	EUR
SteelTec paper holder for diaper changing table	White-painted aluminium	CONT13200710655	746,00

# Sanitary

# SteelTec paper holder for diaper changing table, double-sided closure





# SteelTec paper holder for diaper changing table

Toilet paper holder made of stainless steel. Fits most types of paper rolls. With closure at both ends.

- · For wall mounting
- Fits to several kinds of paper rolls
- Locks at both ends and thus well suited for corner installation
- With lock for effective protection against vandalism
- Spyhole to check the paper level
- Integrated gas spring enables easy one-handed paper refill
- Additionally available in all RAL Classic colours
- Can be combined with diaper changing table

Weight: 4 kg

Dimensions (WxHxD): 585x233x142 mm

Description	Version	Material	Article number	EUR
SteelTec toilet paper holder for diaper changing table	Double-sided closure	Stainless steel	CONT13200710656	385,00

# SteelTec paper roll with sleeve for paper roll holder



#### SteelTec paper roll with sleeve for paper roll holder

Paper roll with sleeve for paper roll holder. Paper rolls that can be torn off in matching sheets for the winding surface of the wall-mounted diaper changing table. The paper is torn off with only one hand, so that one hand is always free for the child.

- · A practical, hygienic solution to ensure a clean changing surface
- Optimum hygiene for nappy change
- Suitable for paper roll holder for diaper changing table

Weight: 2,7 kg

Dimensions (length x  $\varnothing$ ): 700x100 mm (50 sheets) 700x100 mm (105 sheets)

500x100 mm (100 sheets)

Colour: White

Weight per  $m^2$ : 60 g / 41 / 40 /  $m^2$ 

Packaging unit: 2 rolls


- \* Suitable for SteelTec paper holder CONT13200710656
- \*\* Suitable for SteelTec paper holder CONT13200710655

Description	Pcs. per roll/weight per m²	Packaging unit	Article number	EUR
	50 sheets/60 g per m <sup>2</sup>	2 rolls per PU	CONT41000000667 **	120,00
Paper roll with sleeve for paper roll holder	105 sheets/41 g per m²	2 rolls per PU	CONT41000000657 **	116,00
	100 sheets/40 g per m <sup>2</sup>	2 rolls per PU	CONT41000000668 *	112,00

# Sanita

# BJÖRK hand dryer, touchless





#### BJÖRK hand dryer, touchless

Touchless hand dryer with powder coated stainless steel housing in Black matt, White or RAL Classic colours. Designed with cover plate, IR sensor and electronic timer.

- For wall mounting
- Drying cycle: approx. 10-15 s
- Powerful commutator motor
- LED light for power indicator
- Adjustable sensor range
- Adjustable air speed
- Available in all RAL Classic colours
- Top plate in 6 optional standard colours

Weight: 6,5 kg Dimensions (WxHxD): 205x330x183 mm

Nominal capacity: 1600 W Noise level: 76 dBA Outlet temperature (max.): 60 °C Protection class: IPX1

Suitable table and floor stands starting on page 386.

#### \*Note:

Colour Black matt: Gloss level 10 Colour White: Gloss level 60 RAL Classic: Degree of gloss to be indicated

#### Note:

Products in Black matt or White are each designed with a black or white top plate as standard, unless otherwise specified.

Top plate in 6 optional standard designs: Negro Ingo Bianco Male Birke Eastwood Lava Beton Natur Schiefer

Colour has to be specified with your order!











Description	Version	Colour	Article number	EUR
BJÖRK hand dryer	With IR sensor	Black matt*	CONT21600813006	1.174,00
	With IR sensor	White*	CONT21500813000	1.174,00
	With IR sensor	RAL Classic*	CONT21900813002	1.298,00

info@conti.plus | www.conti.plus | CONVKF1010EN | Prices excl. VAT | valid from 07/2021 | Subject to change without prior notice


BJÖRK

reddot award 2015

# Sanitary equipment

# BJÖRK Paper dispenser for paper rolls with inside unwinding, manual





BJÖRK Paper dispenser for paper rolls with inside unwinding, manual

Paper dispenser for paper rolls with inside unwinding. Powder coated stainless steel housing in Black matt, White or RAL Classic colours. Designed with cover plate.

- · For wall mounting
- Large capacity
- One-handed operation
- Easy replacement of the paper roll
- Locking key included

Paper roll ØxH (max.):

· Available in all RAL Classic colours

Net weight: 3,7 kg

(without paper

roll)

Dimensions (WxHxD): 205x330x187

150x225 mm

Scope of delivery without paper roll.



Colour Black matt: Gloss level 10 Colour White: Gloss level 60

RAL Classic: Degree of gloss to be indicated

#### Note:

Products in Black matt or White are each designed with a black or white top plate as standard, unless otherwise specified.

Top plate in 6 optional standard designs: Negro Ingo Bianco Male Birke Eastwood Lava

Eastwood Lav Beton Natur Schiefer

Colour has to be specified with your order!












	Descpription	Colour	Article number	EUR
	BJÖRK Paper dispenser for paper rolls with inside unwinding	Black matt*	CONT16670013275	758,00
		White*	CONT16570013270	758,00
		RAL Classic*	CONT16970013280	895,00

# Sanıta equipm

# BJÖRK dispenser for soap | disinfectant, touchless





#### BJÖRK dispenser, touchless

Touchless soap dispenser for liquid soap and disinfectant with powder coated stainless steel housing in Black matt, White or RAL Classic colours. Designed with cover plate and IR sensor.

- For wall mounting
- Capacity: approx. 0,9 l
- Battery-operated (Batteries not in scope of delivery). Power supply possible.
- LED light for power indicator
- Automatic setting of the optimum activation range
- · Locking key included
- Available in all RAL Classic colours
- Top plate in 6 optional standard colours

Weight: 2,3 kg

Dimensions (WxHxD): 139x330x127 mm Opened (WxHxD): 139x330x330 mm

Content: 950 ml

Suitable table and floor stands starting on page 386.

#### \*Note:

Colour Black matt: Gloss level 10 Colour White: Gloss level 60 RAL Classic: Degree of gloss to be indicated

#### Note:

Products in Black matt or White are each designed with a black or white top plate as standard, unless otherwise specified.

Top plate in 6 optional standard designs: Negro Ingo Bianco Male Birke Eastwood Lava

Beton Natur Schiefer

**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.







Colour has to be specified with your order!






Descpription	Verson	Colour	Article number	EUR
BJÖRK Dispenser	with IR sensor	Black matt*	CONT17600813056	494,00
	with IR sensor	White*	CONT17500813050	494,00
	with IR sensor	RAL Classic*	CONT17900813052	616,00

# Sanitary

# BJÖRK Dispenser for liquid soap/foam soap or disinfectant, manual



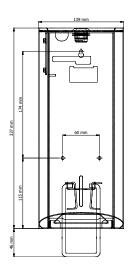

#### BJÖRK Dispenser, manual

Manual dispenser for liquid soap/foam soap or disinfectant. Powder coated stainless steel housing in Black matt, White or RAL Classic colours. Designed with cover plate.

- For wall mounting
- Capacity: approx. 1,2 l
   (= 1000-1200 dosages)
- Locking key included
- Available in all RAL Classic colours
- Top plate in 6 optional standard colours

Net weight: 2,4 kg

Dimensions (WxHxD): 128x373x139 mm Opened (WxHxD): 128x373x330 mm Content: 1200 ml

#### \*Note

Colour Black matt: Gloss level 10 Colour White: Gloss level 60 RAL Classic: Degree of gloss to be indicated

#### Note

Products in Black matt or White are each designed with a black or white top plate as standard, unless otherwise specified.

Top plate in 6 optional standard designs: Negro Ingo Bianco Male Birke Eastwood Lava Beton Natur Schiefer

**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

Colour has to be specified with your order!












Descpription	Colour	Article number	EUR
	Black matt*	CONT17670013125	688,00
BJÖRK dispenser for liquid soap	White*	CONT17570013120	688,00
	RAL Classic*	CONT17970013130	823,00
	Black matt*	CONT17670013165	688,00
BJÖRK dispenser for foam soap	White*	CONT17570013160	688,00
	RAL Classic*	CONT17970013170	823,00
	Black matt*	CONT17670013145	688,00
BJÖRK dispenser for disinfectant	White*	CONT17570013140	688,00
	RAL Classic*	CONT17970013150	823,00

# equipme

## BJÖRK toilet paper holder







for 1 jumbo and 1 standard size paper roll

BJÖRK toilet paper holder,

Toilet paper holder made of powder coated stainless steel housing in Black matt, White or RAL Classic colours.

- For wall mounting
- Locking key included
- Available in all RAL Classic colours

Net weight: 8 kg

Dimensions (WxHxD): : 455x470x172 mm Filling capacity: 1 Jumbo and

1 Standard size paper rolls

Scope of delivery without paper rolls.


#### \*Note

Colour Black matt: Gloss level 10 Colour White: Gloss level 60

RAL Classic: Degree of gloss to be indicated

Description	Version	Colour	Article number	EUR
	For 1 jumbo and BJÖRK toilet paper holder 1 standard size	Black matt*	CONT13600713355	1.073,00
BJÖRK toilet paper holder		1 standard size	White*	CONT13500713350
	paper roll	RAL Classic*	CONT13900713360	1.204,00

# BJÖRK Hygiene box 121

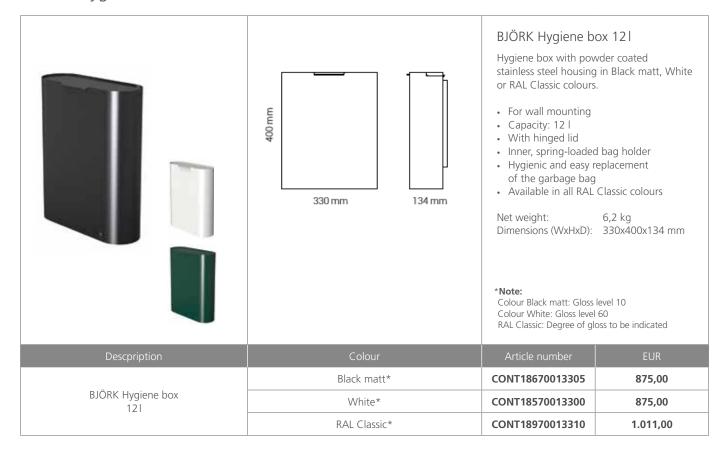


#### BJÖRK Waste bin 181



# BJÖRK diaper changing table





#### BJÖRK diaper changing table

Wall-mounted diaper changing table. Lacquered aluminium profile in Black matt, White or RAL Classic colours. Wall bracket: lacquered steel plate. Swivel: electro-galvanized steel.

- · For wall mounting
- Strong materials with rounded edges for optimal safety
- Ideal for toilets with limited wall space
- Easy opening and closing motion
- Available in all RAL Classic colours
- · Without fastening material

Dimensions (WxHxD):

552x771x100 mm Opened (HxD): 304x751 mm Winding surface (WxD): 700x510 mm Load capacity (max.): 80 kg

Norms: EN 12221-1:2008

+ A1:2013

To combine with:

CONT13600713255, CONT13500713250, CONT13900713260 BJÖRK paper towel

dispenser\*\*

Colour Black matt: Gloss level 10 Colour White: Gloss level 60

RAL Classic: Degree of gloss to be indicated

\*\* Example: combination BJÖRK diaper changing table BJÖRK paper towel dispenser








Description	Colour	Article number	EUR
BJÖRK diaper changing table	Black matt* <b>CONT25678713205</b>		2.291,00
	White*	CONT25578713200	2.291,00
	RAL Classic*	CONT25978713210	2.412,00

# Sanitary

## BJÖRK paper towel dispenser





# BJÖRK paper towel dispenser for BJÖRK diaper changing table

Paper towel dispenser for BJÖRK diaper changing table made of powder coated stainless steel in Black matt, White or RAL Classic colours.

- For wall mounting
- · With safety interlock
- · Locking key included
- Available in all RAL Classic colours

Neight: 2,5 kg

Dimensions (WxHxD): 410x221x79 mm

To combine with:

CONT25678713205, CONT25578713200, CONT25978713210 BJÖRK diaper

changing table

\*Note

Colour Black matt: Gloss level 10 Colour White: Gloss level 60

RAL Classic: Degree of gloss to be indicated

	I .	I .	
Description	Colour	Article number	EUR
BJÖRK Paper towel dispenser for BJÖRK diaper changing table	Black matt*	CONT13600713255	616,00
	White*	CONT13500713250	616,00
	RAL Classic*	CONT13900713260	748,00

# Paper changing mats for BJÖRK paper dispenser for BJÖRK diaper changing table



#### Paper changing mats for BJÖRK paper dispenser

Single 3-layer paper tissues, which can be pulled from the W-fold bundle as individual paper napkins from the dispenser, offering an inexpensive, hygienic solution.

- Practical and hygienic solution for a clean wrapping surface
- Extra comfort and hygiene during diaper changing
- Suitable for the BJÖRK paper dispenser


Packaging unit: 30 sheets per bundle, box with 9 bundles

Net weight: 1 kg


L					
	Description	Dimensions	Packaging unit	Article number	EUR
	Paper changing mats for BJÖRK paper dispenser/diaper changing table	Single paper tissues 203x340 mm	9 bundles/Box	CONT41000003265	41,00

# Sanital

# Floor stand for disinfectant dispensers, with drip tray, height 155 cm

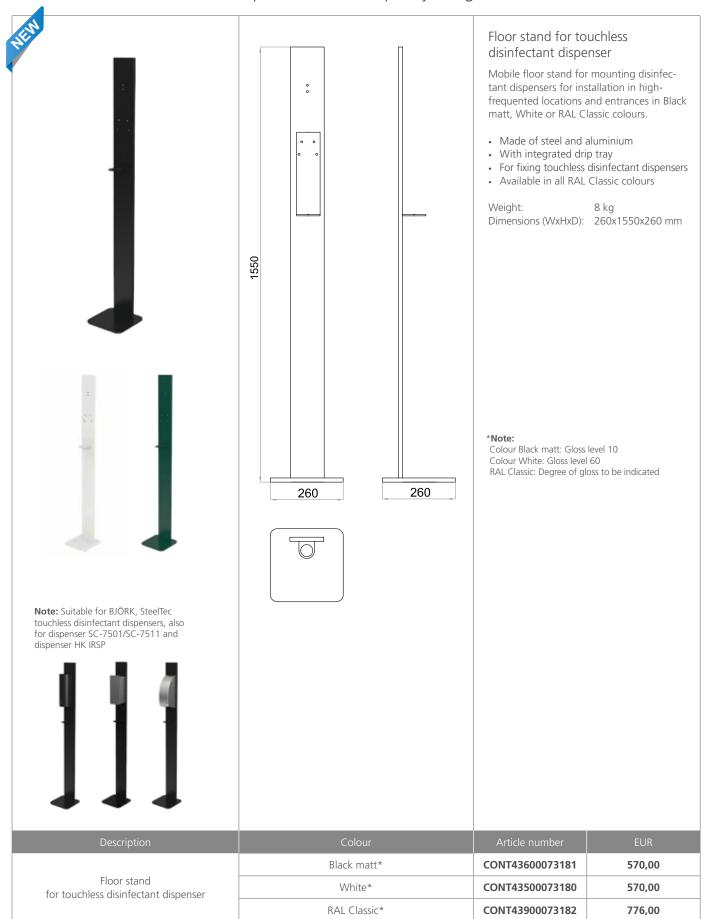


# Floor stand for disinfectant dispensers, with drip tray, height 65 cm hoch

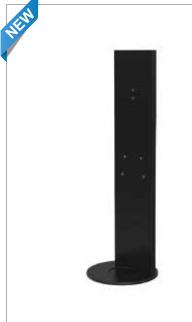



**Note:** Suitable for BJÖRK, SteelTec touchless disinfectant dispensers, also for dispenser SC-7501/SC-7511 and dispenser HK IRSP



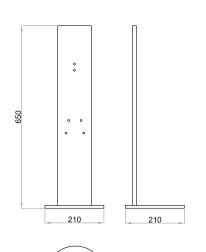

# Table stand for touchless disinfectant dispenser

Mobile table stand for mounting disinfectant dispensers for installation in high-frequented locations and entrances in Black matt, White or RAL Classic colours.

- · Made of steel and aluminium
- With integrated drip tray
- For fixing touchless disinfectant dispensers
- Available in all RAL Classic colours

Weight: 4 kg

Dimensions (WxHxD): 210x650x210 mm

#### \*Note:

Colour Black matt: Gloss level 10 Colour White: Gloss level 60 RAL Classic: Degree of gloss to be indicated

Description	Colour	Article number	EUR
Table stand for touchless disinfectant dispenser	Black matt*	CONT43600083176	474,00
	White*	CONT43500083175	474,00
	RAL Classic*	CONT43900083177	680,00



# Drip tray for wall-mounted disinfectant dispenser



# Sanitary

# Transformer 230 V – 6 V/DC (plug) for soap and disinfection dispenser SteelTec, BJÖRK



Transformer 230 V – 6 V/DC

as wall power supply for soap and disinfection dispenser SteelTec, BJÖRK

Cable lenght: 1800 mm Colour: Black

Description	Article number	EUR
Transformer 230 V – 6 V/DC (plug) for soap and disinfection dispenser SteelTec, BJÖRK	CONO010888	52,00

# Transformer 230 V – 6 V/DC concealed for dispenser systems SteelTec, BJÖRK



Transformer 230 V – 6 V/DC as concealed power supply for soap and disinfection dispenser SteelTec, BJÖRK

Cable lenght: 1800 mm Colour: Black

Wall box included in scope of delivery.

Description	Article number	EUR
Transformer 230 V – 6 V/DC concealed for soap and disinfection dispenser SteelTec, BJÖRK	CONO110888	198,00

# Transformer 230 V – 6 V/DC (plug) with transition to monobloc battery connectors



Transformer 230 V – 6 V/DC (plug) with transition to monobloc battery connectors as wall power supply for soap and disinfection dispenser


Upgrade set for battery operated dispenser to main supply.

Cable lenght: 700 mm Colour: Black

Description	Article number	EUR
Transformer 230 V – 6 V/DC (plug) with transition to monobloc battery connectors	CONO120888	204,00

## Hand dryer AirTap





#### Hand dryer AirTap, basin installation

Touchless hand dryer for basin installation.

- Intelligent temperature control and automatic adjustment
- Powerful commutator motor with carbon brushes for rear mounting
- · IR sensor and electronic timer
- Adjustable activation distance: 20-130 mm
- Safety shut-down after 60 s continuous operation
- · Casing: stainless steel, satin finish


Weight: 5,6 kg

Dimensions (ØxHxD): 50x170x220 mm

Operating voltage: 230 V
Nominal capacity: 1000 W
Outlet temperature (max.): 57 °C
Drying time: 10-15 s
Noise level: 68,5-70,5 dB
Protection class: IP35

Description	Version	Material / Colour	Article number	EUR
Hand dryer AirTap	Basin installation	Stainless steel	CONT21206830370	1.541,00





#### Hand dryer AirTap, wall mounting


Touchless hand dryer for wall mounting.


- For mounting behind a panel or mirror
- Intelligent temperature control and automatic adjustment
- Powerful commutator motor with carbon brushes for rear mounting
- IR sensor and electronic timer
- Adjustable activation distance: 20-130 mm
- Safety shut-down after 60 s continuous operation
- · Casing: stainless steel, satin finish

Weight: 5,6 kg
Dimensions (ØxHxD): 38x50x220 mm
Operating voltage: 230 V
Nominal capacity: 1000 W
Outlet temperature (max.): 57 °C
Drying time: 10-15 s
Noise level: 68,5-70,5 dB
Protection class: IP35


Description	Version	Material / Colour	Article number	EUR
Hand dryer AirTap	Wall mounting	Stainless steel	CONT21206840372	1.469,00

## Dispenser SoapTap

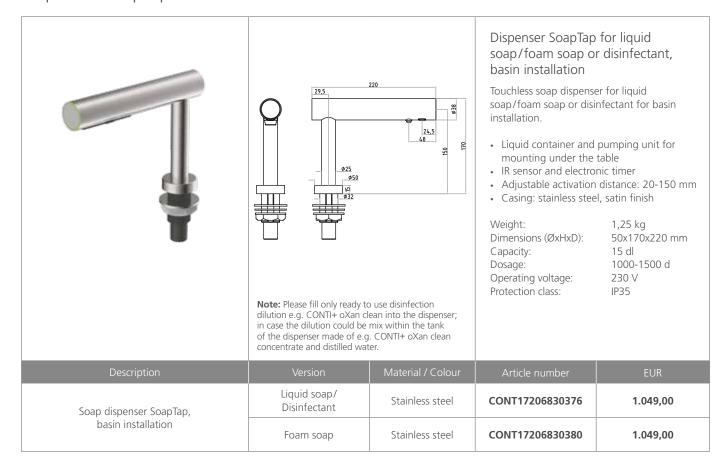

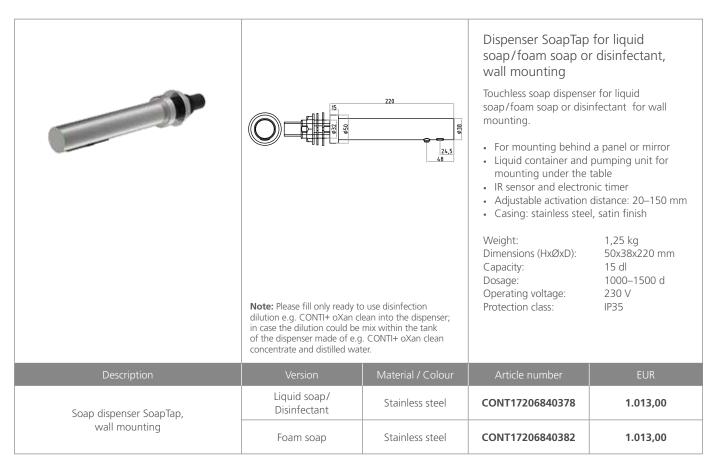





#### Hand and hair dryer

White hand and hair dryer with 4 mm diecast aluminium housing, with push button and infinitely adjustable electronic timer for drying cycle.

- For wall mounting
- With push button activation
- Drying time approx. 25-170 sec.
- Standard version: white
- Additionally available in all RAL Classic colours
- · Almost maintenance-free
- · With induction motor

Weight: 7,45 kg
Dimensions (WxHxD): 311x313x201 mm
Nominal capacity: 2360 W
Noise level: 62 dBA
Outlet temperature (max.): 65 °C
Protection class: IP23


Material: 4 mm die-cast aluminium, white

To combine with:

CONT26000710645 Height adjustment rail

Description	Version	Colour	Article number	EUR
Hand and hair dryer	Manual	White	CONT26500710100	1.039,00





## Height adjustment rail for hair dryer

Height adjustment rail for electrical hair dryer.

- Infinitely adjustment range up to 500 mm
- Sturdy rail fitted with strong gas springs

Weight: 6,25 kg
Dimensions (WxHxD): 175x983x65 mm
Execution: Up to 500 mm
Material: Aluminum /
stainless steel

To combine with:

CONT26500710100 hand and hair dryer

(not in scope of delivry)


#### Optional:

With mirror over entire rail

Description	Version	Material	Article number	EUR
Height adjustement rail for hair dryer	Stepless height adjustment	Aluminum/ Stainless steel	CONT26000710645	1.142,00

## Hand dryer AE





#### Hand dryer AE

White hand dryer with housing made of 4 mm die-cast aluminium, touchless with IR sensor and electronic timer.

- For wall mounting
- Drying time approx. 25-170 sec.
- Standard version: white
- Additionally available in all RAL Classic colours
- Almost maintenance-free
- · With induction motor
- 90% recyclable


Weight: 7,25 kg
Dimensions (WxHxD): 311x313x178 mm

Dimensions (WxHxD): 311x313x Nominal capacity: 2360 W Noise level: 62 dBA Outlet temperature (max.): 65 °C Protection class: IP23

Description	Version	Colour	Article number	EUR
Hand dryer AF	IR sensor	White	CONT21500810261	1.025.00

## Hand dryer





### Hand dryer


- · Touchless function
- Low noise induction motor (maintenance-free), soft starting
- Sturdy metal housing
- Overheat auto-stop for heater and motor
- Safety switch-off after 2 min. continuous operation
- Water-proof microprocessor

Mains operation plug-in: 230 V, 2300 W Dimensions (WxHxD): 235x228x161 mm

Description	Material	Article number	EUR
Hand dryer with IR sensor	Stainless steel matt	CONT21200810000	571,00

## Hand dryer MINI





#### MINI Hand dryer

Touchless hand dryer with white housing made of 2 mm die-cast aluminium.

- · For wall mounting
- Housing: die-cast aluminium
- Drying time approx. 30 s
- IR sensor and electronic timer
- Stops 2 s after removal of hands or 60 s after continuous operation
- Commutator motor without carbon


Weight: 5,4 kg

Dimensions (WxHxD): 248x220x170 mm
Nominal capacity: 1800 W
Operating voltage: 230 V
Noise level: 64 dBA
Outlet temperature (max.): 55 °C
Protection class: IP21

Description	Version	Colour	Article number	EUR
Hand dryer MINI	IR sensor	White, RAL 9003 glossy 75	CONT21500810270	564,00

## Hand dryer MAXI





#### MAXI Hand dryer

Hand dryer with housing made of 2 mm steel plate. With fixed-mounted, bright chrome exhaust vent made of zinc.
Touchless with IR sensor and electronic timer.

- · For wall mounting
- Drying time of approx. 20-25 sec.
- Powerful commutator motor
- · Very hygienic
- Maintenance-friendly
- Strong and shock-proof housing preventing vandalism
- Exhaust vent

Weight: 7 kg


Dimensions (WxHxD): 281x247x212 mm Nominal capacity: 2400 W Noise level: 70 dBA

Outlet temperature (max.): 65 °C Protection class: IP21

Description	Version	Colour	Article number	EUR
Hand dryer MAXI	With IR sensor	White	CONT21500810272	726,00
nand dryer MAXI	With IR sensor	Chromed	CONT21300810274	901,00

## Hand dryer TURBO Low Noise





#### TURBO Hand dryer Low Noise

Touchless hand dryer with stainless steel housing, in brushed stainless steel or white enamelled. Designed with IR sensor and electronic timer.

- · For wall mounting
- Drying time of approx. 10-15 sec.
- Adjustable activation distance: 150-190 mm
- Adjustable air speed: 65-95 m/s
- Powerful commutator motor with carbon brushes
- · Very hygienic
- · Maintenance-friendly

Weight: 5,5 kg


Dimensions (WxHxD): 205x287x180 mm Nominal capacity: 700–1400 W Noise level: 62,8 – 68,2 dBA

Outlet temperature (max.): 55 °C Protection class: IP31

Description	Version	Colour	Article number	EUR
TURBO Hand dryer Low Noise	With IR sensor	White	CONT21500810246	726,00
	With IR sensor	Brushed stainless steel	CONT21200810247	887,00

## Hand dryer TURBO



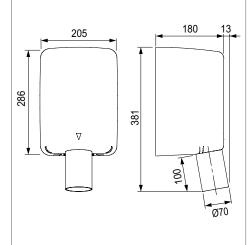

## TURBO Hand dryer, for mounting behind mirrors or cabinets

Touchless hand dryer for mounting behind mirror/cabinet. Brushed stainless steel housing. Designed with IR sensor and electronic timer.

- Drying cycle: approx. 10-15 sec.
- Cabinet and nozzle made of brushed stainless steel
- · Powerful commutator motor

Weight: 5,8 kg

Dimensions (WxHxD): 205x286x180 mm


Nozzle (L): 100 mm
Diameter (Ø): 70 mm
Nominal capacity: 1600 W
Noise level: 78 dBA
Outlet temperature (max.): 60 °C
Protection class: IPX1


Description	Version	Colour	Article number	EUR
Hand dryer TURBO	With IR sensor	Stainless steel matt	CONT21200850244	1.028,00



## Hair dryer ELEGANCE







### **ELEGANCE** Hair dryer

Double insulated hair dryer made of impact-resistant white plastic.


- · For wall mounting
- Robust hair dryer with strong warm-airhose
- Manual adjustment of air volume between two levels: 1200 W max.


Weight: 1 kg


Dimensions (WxHxD): 112x118x207 mm

Description	Material / Colour	Article number	EUR
Hair dryer ELEGANCE	Plastic/White	CONT26500710713	101,00

## Waste bins

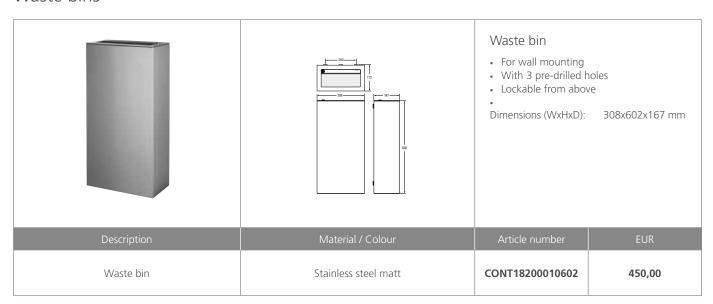

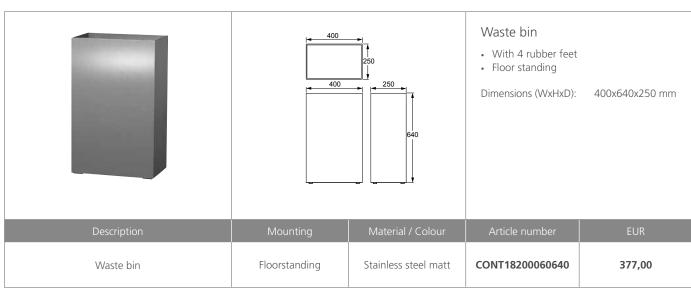


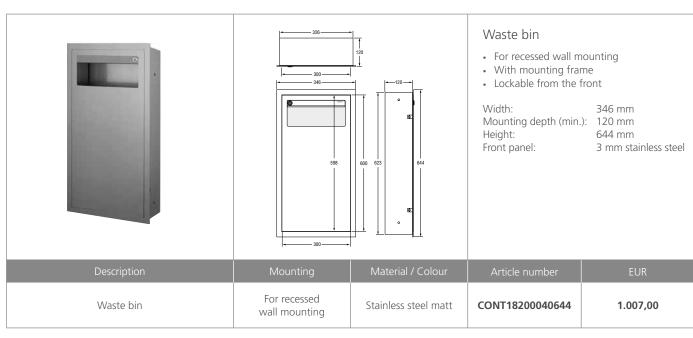


## Paper towel dispenser and waste bin combination




## Hygienic bag dispenser and waste bin combination

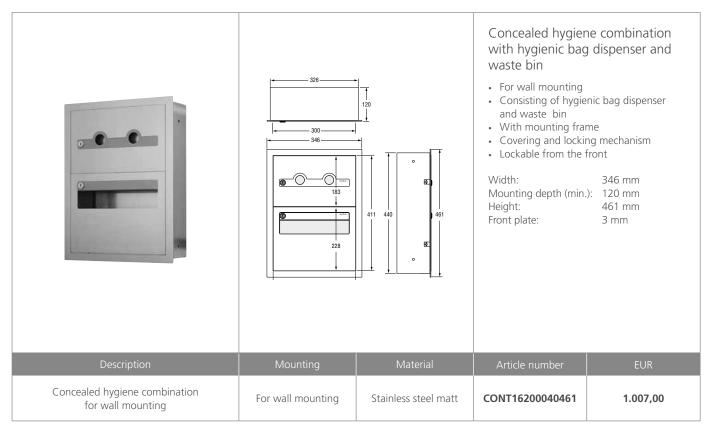


## Hygiene bins

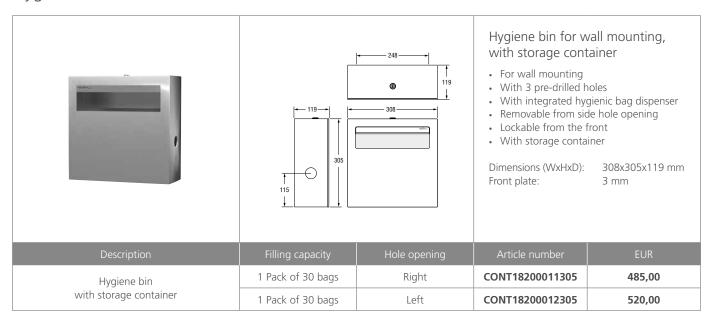

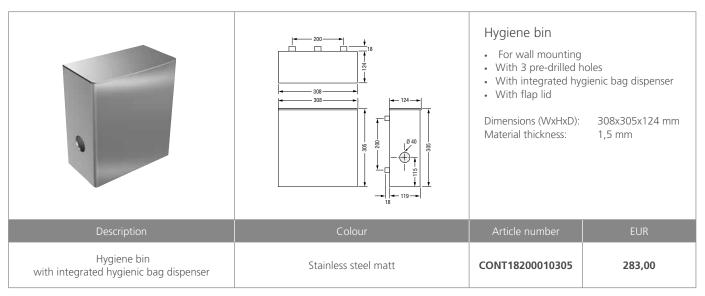


## Hygienic bag dispenser

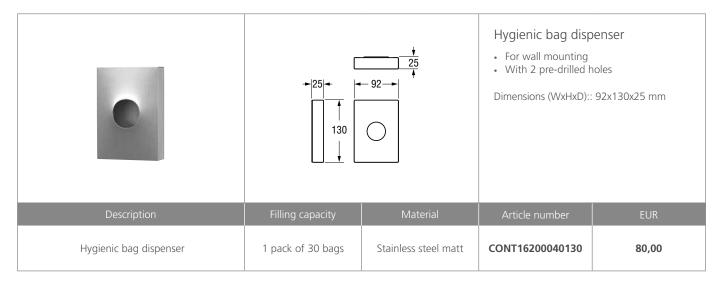

## Paper towel dispenser






### Paper towel dispenser

- For vertical and horizontal vanity installation
- Holding approx. 500 paper towels
- Dispensing from top or from the front
- Mounting plate for horizontal mounting on site or on request

Front panel: 330x180x2 mm
Insert box: 274x155x344 mm
Cut-out diameter: 276x157 mm
Filling height: ca. 230 mm

Description	Mounting	Material	Article number	EUR
Paper towel dispenser	For vanity installation	Stainless steel matt	CONT16200030000	435,00





#### Paper towel dispenser


- · For wall mounting
- With 3 pre-drilled holes
- Without fixing material

• Lockable from above

Dimensions (WxHxD): 308x305x119 mm Front plate: 2 mm

Bezeichnung	Mounting	Material	Article number	EUR
Papierhandtuchspender	For wall installation	Stainless steel matt	CONT16200010000	229,00





## Paper towel dispenser

- For mounting behind the mirror
- Paper removal from below
- Filling from above

Dimensions (WxHxD): 300x360x120 m Filling height: ca. 350 mm


Minimum distance

to washbasin: 400 mm

Description	Mounting	Material	Article number	EUR
Paper towel dispenser	For mounting behind the mirror	Stainless steel matt	CONT16200050000	185,00

## Mesh basket for paper waste



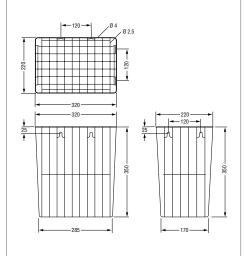

### Mesh basket for paper waste


- For use with or without waste bags
- · Wire mesh
- With wall bracket
- For exposed mounting or free-standing
- Stainless steel mesh, plastic coated

Dimensions (WxHxD): 320x350x220 mm

Description	Mounting	Colour	Article number	EUR
Mach backet with 25 liter values	For well mounting	White	CONT18500000640	88,00
Mesh basket with 25 liter volume	For wall mounting	Silver (rilsan coated)	CONT18400000640	88,00

## Diaper changing table






### Diaper changing table


- For exposed mounting
- Down foldable wall
- Disinfectable underlay of antibacterial plastic
- With substructure made of steel
- Usable up to 60 kg
- With dispenser for towels
- Plastic beige
- · Incl. mounting material


Dimensions (WxHxD): 559x914x127 mm Projection: 889 mm

Description	Material/Colour	Article number	EUR
Diaper changing table	Plastic/Beige	CONT25578710000	1.120,00

## Wall and table soap dispenser

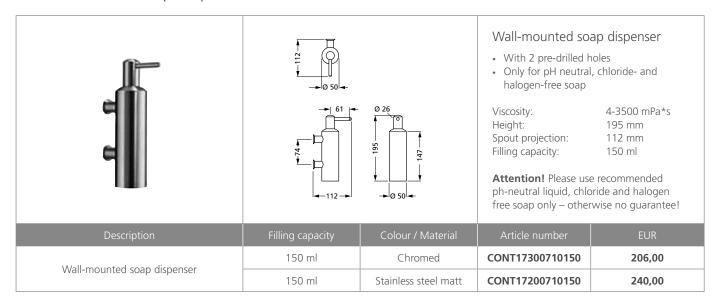


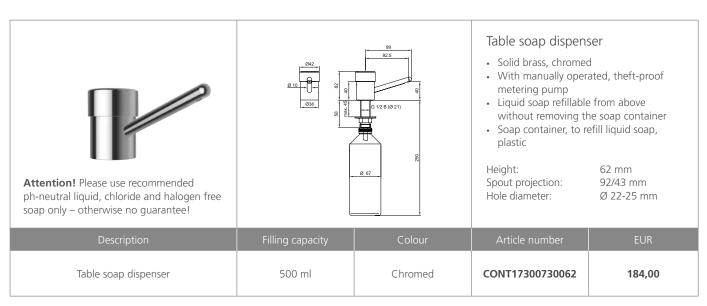

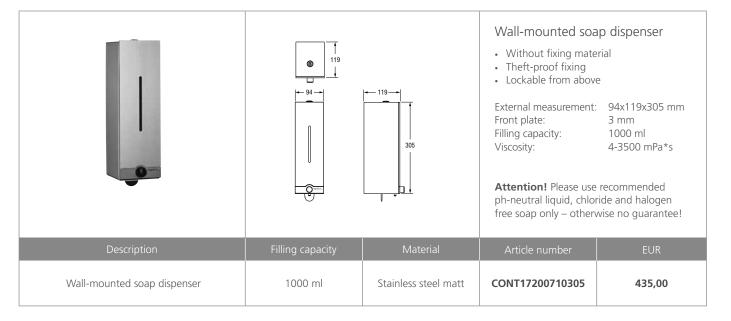

## Table soap dispenser





#### Table soap dispenser


- With container 1000 ml
- Refillable from above or below
- Pumping height approx.: 1500 mm
- Dosage 1-2 ml per keypress
- For panel thickness 50 mm

Viscosity 4-3500 mPa\*s Spout projection: 90 mm Height: 120 mm Hole diameter: 23 mm

**Attention!** Please use recommended pH-neutral liquid, chloride and halogen free soap only – otherwise no guarantee!

Description	Filling capacity	Colour / Material	Article number	EUR
Table soap dispenser	1000 ml	Chromed	CONT17300731090	209,00
short spout	1000 ml	Stainless steel matt	CONT17200731090	246,00





#### Table soap dispenser


- With container 1000 ml
- Refillable from above or below
- Pumping height approx.: 1500 mm
- Dosage 1-2 ml per keypress
- For panel thickness 50 mm

Viscosity 4-3500 mPa\*s Spout projection: 149 mm Height: 120 mm Hole diameter: 23 mm


**Attention!** Please use recommended pH-neutral liquid, chloride and halogen free soap only – otherwise no guarantee!

Description	Filling capacity	Colour / Material	Article number	EUR
Table soap dispenser	1000 ml	Chromed	CONT17300731149	273,00
long spout	1000 ml	Stainless steel matt	CONT17200731149	319,00

## Soap dispenser CLEANLINE

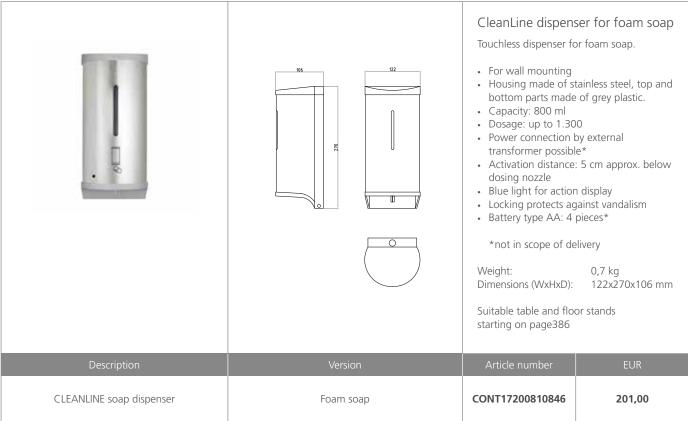


## Soap dispenser CLEANLINE

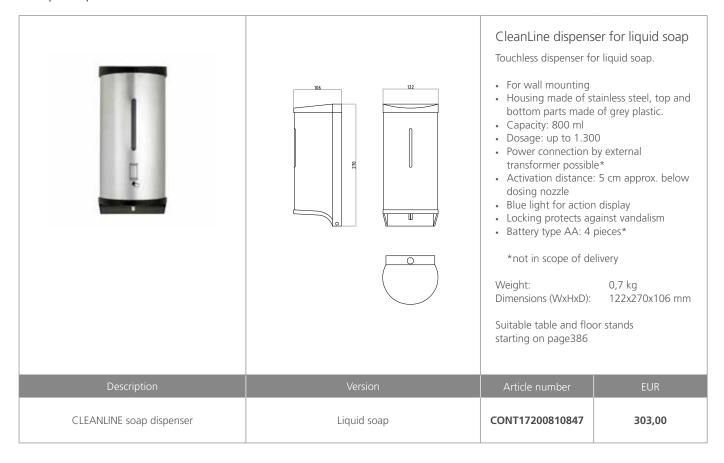

## Dispenser HK IRSP





**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

#### Dispenser for disinfectant

Touchless dispenser for disinfectant.

- For wall mounting
- Housing made of stainless steel, top and bottom parts made of grey plastic.
- · Capacity: 800 ml
- Dosage: up to 1.300
- Power connection by external transformer possible\*
- Activation distance: 5 cm approx. below dosing nozzle
- Blue light for action display
- Locking protects against vandalism
- Battery type AA: 4 pieces\*

\*not in scope of delivery

Weight: 0,7 kg


Dimensions (WxHxD): 122x270x106 mm

Suitable table and floor stands starting on page 386

Description	Material/Colour	Article number	EUR
Touchless Disinfectant dispenser	Stainless steel/Plastic	CONT17500810031	265,00

## Dispenser for disinfectant | liquid soap SC-268L





**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

## Dispender for liquid soap or disinfectant, manual


- For wall mounting (including fixing material)
- Housing made from aluminium/pump lever made from stainless steel
- With refill tank 1 litres
- Dosing quantity 1-3 ml per stroke


Dimensions (WxHxD): 95x320x220 mm

Description	Material/Color	Articel number	EUR
Soap/disinfectant dispenser SC-268L manuel	ABS (White/Grey)	CONT17700710268	90,00

## Dispenser ELEGANCE







**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

#### Dispenser ELEGANCE

Touchless soap dispenser for liquid soap or disinfectant.

- · For wall mounting
- Battery operated
- Casing made of impact-resistant plastic, white
- With level indicator
- Special key for locking
- Ready for activation in closed state
- Activation distance: 1 to 8 cm
- Dosage quantity: 1 ml per dosage

Weight: 1 kg

Dimensions (WxHxD): 140x235x115 mm


Capacity: 1,1 l

Suitable table and floor stands starting on page 386.

Description	Version	Colour	Article number	EUR
ELEGANCE Dispenser	Liquid soap	White	CONT17500810717	172,00
	Disinfectant	White	CONT17500810718	185,00

## Drip tray for dispenser ELEGANCE



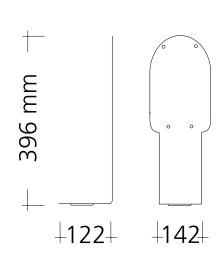

## Drip tray for dispenser ELEGANCE

- For wall mounting
- Made of powder-coated steel
- To prevent splashes and slippery floor

Weight: 0,45 kg Dimensions (WxHxD): 142x396x122 mm

Description	Colour	Article number	EUR
Drip tray for dispenser ELEGANCE	White	CONT44500053185	106,00

## Disinfectant dispenser SC-7501



#### Disinfectant dispenser SC-7501, touchless

- For wall mounting (including fixing material)
- Touchless activation via IR sensor
- · Housing made of white ABS, rear panel made of grey ABS
- With refill tank 0.5 litres
- Dosage quantity 1 ml per dosage
- Battery operated (4 x 1.5 V alkaline type AA not included)
- Key locking
- Front inspection window for fill level control

Dimensions (WxHxD): 90x200x80 mm

Suitable table and floor stands starting on page 386.

**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.

Description	Material/Colour	Article number	EUR
Disinfectant dispender SC-7501 touchless	ABS (White/Grey)	CONT17500817501	138,00

## Dispenser for disinfectant | liquid soap SC-7511



#### Dispenser for disinfectant | liquid soap SC-7511, touchless

- For wall mounting (including fixing material)
- Touchless activation via IR sensor
- Housing made of white ABS, rear panel made of grey ABS
- With refill tank 0.5 litres
- Dosage quantity 1 ml per dosage
- Battery operated (4 x 1.5 V alkaline type AA not included)
- Key locking
- Front inspection window for fill level control

Dimensions (WxHxD): 90x200x80 mm

Suitable table and floor stands starting on page 386.

#### Note:

Prepared as disinfectant dispenser; nozzle for conversion to liquid soap dispenser included in delivery.

**Note:** Please fill only ready to use disinfection dilution e.g. CONTI+ oXan clean into the dispenser; in case the dilution could be mix within the tank of the dispenser made of e.g. CONTI+ oXan clean concentrate and distilled water.


Description	Material/Colour	Article number	EUR
Dispenser for disinfectant/liquid soap SC-7511 touchless	ABS (White/Grey)	CONT17500817511	163,00



# Sanitary

## Toilet accessories






### Toilet brush set and spare brush

- For wall mounting
- with container and replaceable brush head black
- removable plastic insert
- theft-proof fastening

Description	Colour / Material	Article number	EUR
Toilet brush	Chromed	CONT12300010000	152,00
ioliet brusti	Stainless steel matt	CONT12200010000	152,00
Darila sa masant la musla	Black / chrome	CONT12300010010	56,00
Replacement brush	Black / stainless steel	CONT12200010020	58,00






### Toilet paper holder

- For wall mounting
- · Theft-proof fixing

Distance from wall: 85 mm
Diameter: 12 mm
Length: 160 mm

Description	Length	Colour / Material	Article number	EUR	
Toilet paper holder	160 mm	Chromed	CONT13306010000	81,00	
	160 mm	Stainless steel matt	CONT13206010000	103,00	





### Spare toilet paper holder


- •
- For wall-mounting
- Theft-proof fixing

Projection: 100 mm
Diameter: 12 mm
Width: 26 mm
Height: 160 mm

Description	Length	Colour / Material	Article number	EUR
Spara tailet paper helder	160 mm	Chromed	CONT13308010000	81,00
Spare toilet paper holder	160 mm	Stainless steel matt	CONT13208010000	103,00

## Toilet accessories






### Hook with doorstop

- For wall mounting
- With pin

Projection: 70 mm Diameter: 19 mm

Description	Projection	Colour / Material	Article number	EUR
Haali wikhada araba	70 2020	Chromed	CONT14300010100	45,00
Hook with doorstop	70 mm	Stainless steel matt	CONT14200010100	42,00





#### Hook

- For wall mounting
- Theft-proof fixing
- With pin

Projection: 50 mm Diameter: 12 mm

Description	Projection	Colour / Material	Article number	EUR
111	F0 mm	Chromed	CONT14300010000	42,00
Hook	50 mm	Stainless steel matt	CONT14200010000	40,00








## Discharge opening

- Round
- For installation in the vanity top

Inner diameter: 130 mm Outside diameter: 150 mm Height: 120 mm

Description	Material	Article number	EUR
Round discharge opening	Stainless steel matt	CONT24207030150	224,00






## Discharge opening


- Rectangular
- For installation in the vanity top

Inner edge: 100x120 mm Outside edge: 120x140 mm Height: 100 mm


Description	Material	Article number	EUR
Rectangle discharge opening	Stainless steel matt	CONT24208030130	275,00

## Wall mirrors

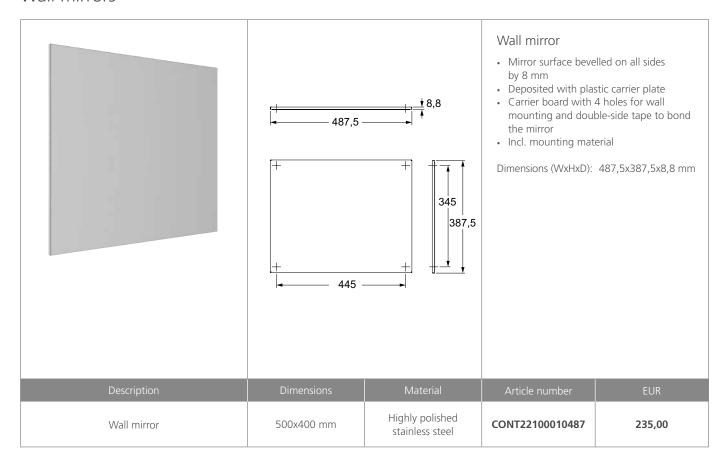

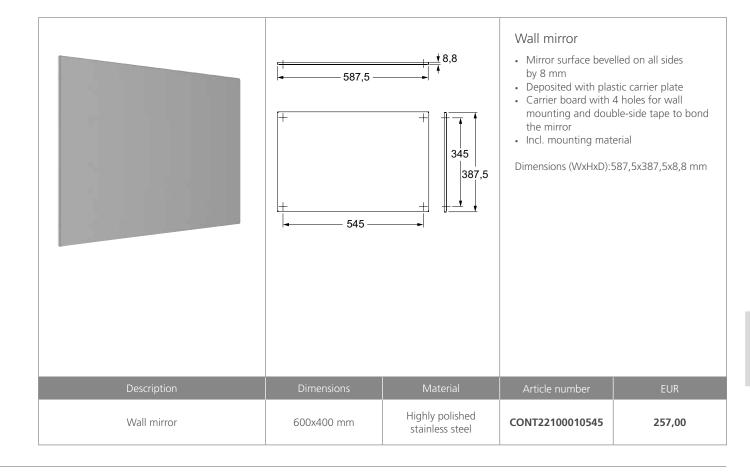

## Wall mirrors

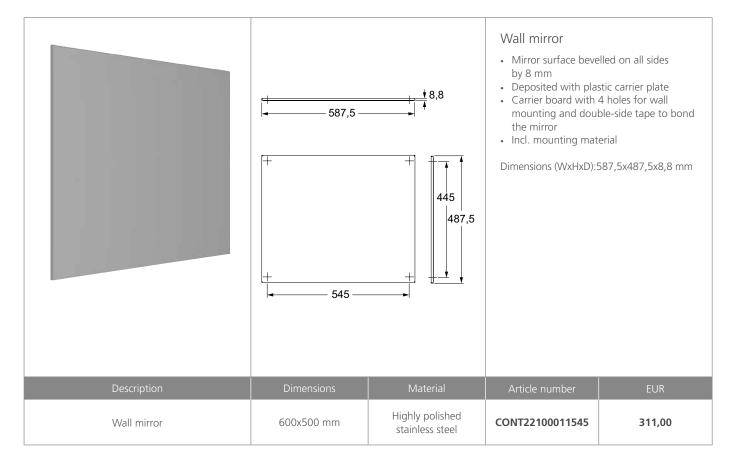

## Consumable supplies



### Paper towels

- White
- Super soft
- 2-Layer
- Z-interfold

Dimensions:

250x230 mm (unfolded) 5.000 Pieces (20 packages a 250 towels) Content:

Description	Content	Colour	Article number	EUR
Paper towels	5.000 pieces	White	CONO740000	198,00



Hygienic bags

LDPE, white

Material: Dimensions (WxHxD): 85x125x20 mm (refill) 750 Pieces (25 refill a 30 pcs.)

Description	Content	Colour	Article number	EUR
Hygienic bags	750 pieces	White	CONO741000	110,00



## SteelTec washbasin Bergen 480





### SteelTec washbasin Bergen 480

- For wall mounting
- With washboard stamping at front side
- With integral hygiene edge
- · With overflow set
- Without tap hole
- With 1 1/2" drain valve
- With plug and chain
- · With wall brackets
- With fixing material

Dimensions (WxHxD): Material:

555x450x268 mm Stainless steel 1.4301





Description	Width	Material	Article number	EUR
SteelTec washbasin Bergen 480	550 mm	Stainless steel matt	CONT01221210480	470,00




## SteelTec washbasin Bergen 530




### SteelTec washbasin Bergen 530

- For wall mounting
- With washboard stamping at front side
- With integral hygiene edge
- · With overflow set
- Without tap hole
- With 1 1/2" drain valve
- With plug and chain
- With wall brackets
- With fixing material

Dimensions (WxHxD): Material: 655x250x530 mm Stainless steel 1.4301





Description	Width	Material	Article number	EUR
SteelTec washbasin Bergen 530	655 mm	Stainless steel matt	CONT01221210530	506,00

## SteelTec washbasin Malmoe




#### SteelTec washbasin Malmoe


- For wall mounting
- With integrated brackets
- Mounting screwsWith 1 1/4" drain valve
- Without tap hole
- · With overflow

Dimensions (WxHxD): Material:

600x130x415 mm Stainless steel

1.4301





Description	Width	Material	Article number	EUR
SteelTec washbasin Malmoe	600 mm	Stainless steel matt	CONT01211210415	578,00




## SteelTec washbasin Emden



#### SteelTec washbasin Emden

- Washbasin for wall mounting
- With tap hole
- With integrated soap dishes
- · With overflow set
- With 1 1/2" drain valve
- · With plug and chain
- With wall brackets
- · With fixing material

Dimensions (WxHxD): Material: 560x199x420 mm Stainless steel 1.4301

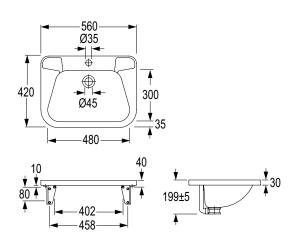

Description	Width	Material	Article number	EUR
SteelTec Washbasin Emden	560 mm	Stainless steel matt	CONT01212200420	367,00


## SteelTec built-in basin Lund 305




## SteelTec built-in basin Lund 305, round

- For table installation, for gluing
- Without overflow set

External dimension: Ø 305 mm
Internal dimension: Ø 252 mm
Cut-out diameter: Ø 270mm
Height: 125 mm
Material: Stainless steel
1.4301





Description	Material	Article number	EUR
SteelTec built-in basin Lund 305, round	Polished inside and outside	CONT02121130305	342,00



## SteelTec wash trough Fjord 1200





## SteelTec wash trough Fjord 1200

- For wall mounting
- Seamlessly pressed
- Including 1 1/2" drain valve and possibility to mount an optional wall panel
- Without tap hole
- · Without overflow
- With consoles
- With mounting material

Dimensions (WxHxD): Material: 1200x140x430 mm Stainless steel

1.4301

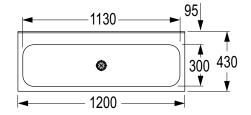



Description	Width	Material	Article number	EUR
SteelTec wash trough Fjord 1200	1200 mm	Stainless steel matt	CONT07211211201	997,00

## SteelTec wash trough Fjord 1800




### SteelTec wash trough Fjord 1800

- For wall mounting
- Seamlessly pressed
- Including 1 1/2" drain valve and possibility to mount an optional wall panel
- Without tap hole
- Without overflow
- With consoles
- With mounting material

Dimensions (WxHxD): Material:

1800x130x430 mm Stainless steel 1.4301

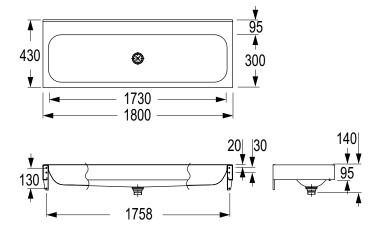



				1
Description	Width	Material	Article number	EUR
SteelTec wash trough Fjord 1800	1800 mm	Stainless steel matt	CONT07211211801	1.164,00

#### Corner protection


- To retrofit corner protectors
- For SteelTec wash trough Fjord
- Plastic ABS
- Packaging unit: 2 pieces

Description	Material	Colour	Article number	EUR
Corner protection	Plastic	Black	CONO720000	58,00

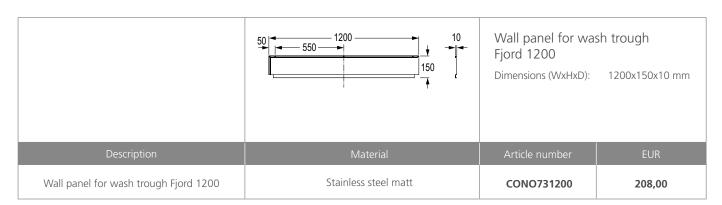

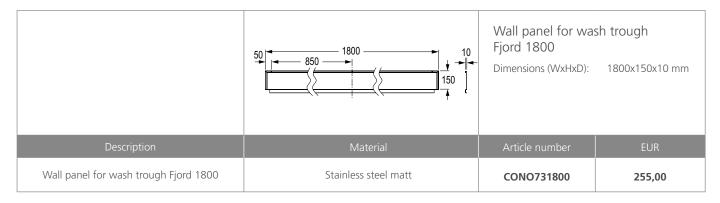



## SteelTec urinal partition wall

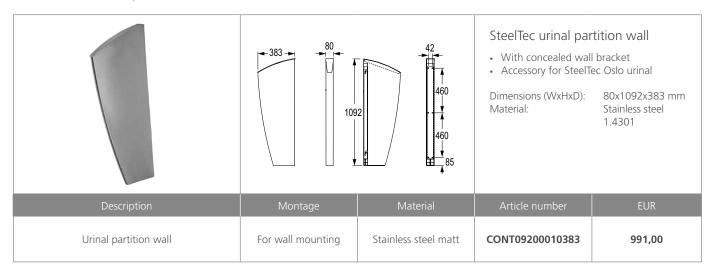

## SteelTec laboratory sink Visby 390



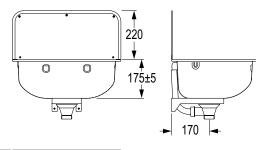



### SteelTec laboratory sink Visby 390

- For wall mounting
- With wall panel
- With overflow set With 3 1/2" x 1 1/2" drain valve
- With plug and chain
- With brackets
- With mounting material


Dimensions (WxHxD): 490x395x390 mm Material: Stainless steel


1.4301

Description	Width	Material	Article number	EUR
SteelTec laboratory sink Visby 390	490 mm	Stainless steel matt	CONT05221210390	341,00

## SteelTec bucket sink Visby 450



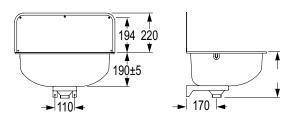



### SteelTec bucket sink Visby 450

- For wall mounting
- With wall panel

- With space-saving siphon
  With 3 1/2"x 2" drain valve
  Including 2" 1 1/2" adapter
- · Without overflow
- Without bucket grid
- · Without tap hole
- With brackets
- With mounting material


Dimensions (WxHxD): Material:

560x450x410 mm Stainless steel 1.4301

Description	Width	Material	Article number	EUR
SteelTec bucket sink Visby 450	560 mm	Stainless steel matt	CONT05211210450	530,00

## SteelTec bucket sink Visby 330



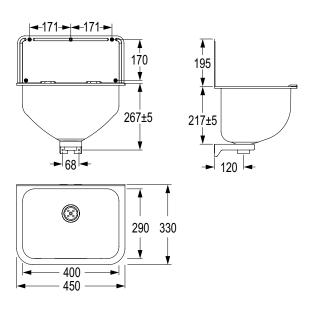

### SteelTec bucket sink Visby 330

- For wall mountingWith wall panel
- With space-saving siphonWith 1 1/2" drain valve
- Without bucket grid
- · Without tap hole
- · Without overflow
- · With brackets

Dimensions (WxHxD):


450x412x330 mm Stainless steel 1.4301

Material:

Description	Width	Material	Article number	EUR
SteelTec bucket sink Visby 330	450 mm	Stainless steel matt	CONT05211210330	283,00

## SteelTec bucket sink Visby 310



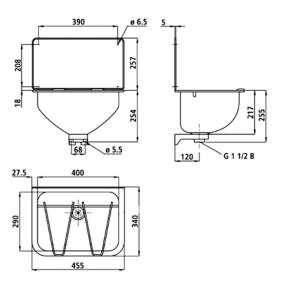

### SteelTec bucket sink Visby 310

- For wall mountingWith wall panel


- With space-saving siphonWith 1 1/2" drain valve
- With bucket grid
- · Without tap hole
- Without overflow
- · With brackets


Dimensions (WxHxD): Material:

455x511x340 mm Stainless steel 1.4301

Description	Width	Material	Article number	EUR
SteelTec bucket sink Visby 310	455 mm	Stainless steel matt	CONT05211210310	274,00

# Accessories for SteelTec bucket sinks

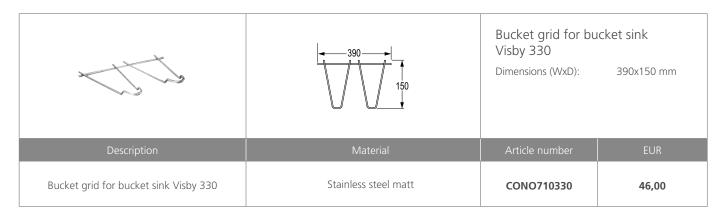


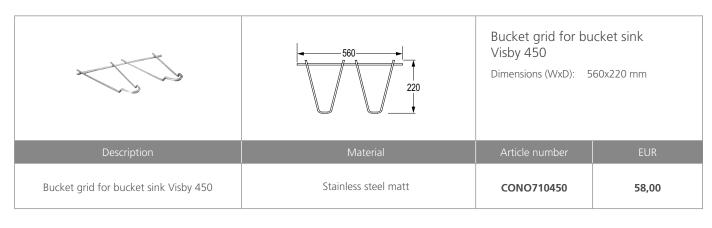



## SteelTec urinal Oslo

- For wall mounting or rear panel mounting
- Vandal-proof version
- With 1 1/4" siphon
- With mesh drain
- With wall bracket
- With installation materials
- With flexible water connection
- With spray nozzle
- Polished inside, matt outside

Dimensions (WxHxD): Material: 330x500x414 mm stainless steel 1.4301







Description	Montage	Material	Article number	EUR
SteelTec urinal Oslo	Wall mounting	Stainless steel matt	CONT08200010500	1.330,00

# SteelTec wall-mounted toilet Malm, without seat, visible mounting




## SteelTec Malm wall-mounted WC


Wall-hung deep-flush WC for installation in conjunction with common concealed mounting elements. Stainless steel matt, without seat, visible fastening. Pre-drilled mounting option for WC seat provided with cover plates. Fastening by means of mounting frame on the wall, or directly on the mounting element.


Without sharp edges, corners or seams.

- Connection: from behind
- For common concealed cisterns/pressure flushers
- Flush volume: up to 6 l
- Outlet: DN 100
- Including wall bracket and mounting material
- With siphon
- Stainless steel matt

Dimensions (WxHxD): Material: 370x340x550 mm stainless steel 1.4301









Description	Version	Material	Article number	EUR
SteelTec Malm wall-mounted toilet	Without seat, visible fastening	Stainless steel matt	CONT08230010750	769,00



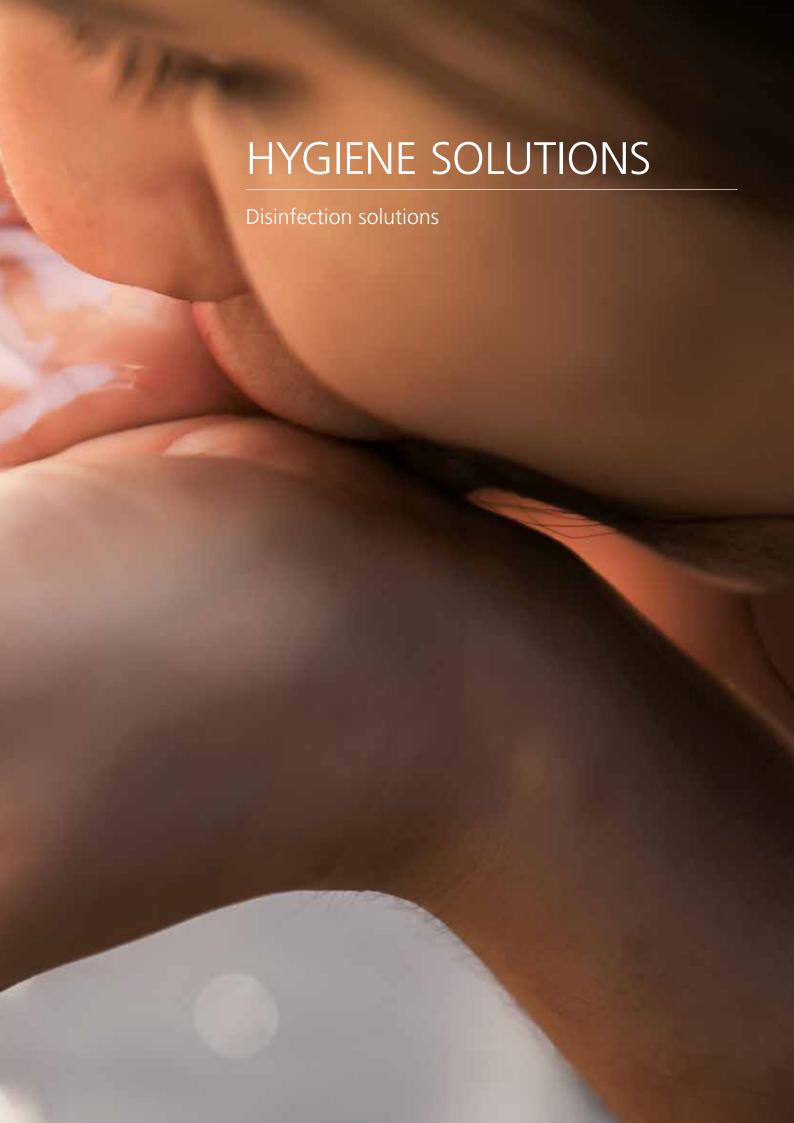

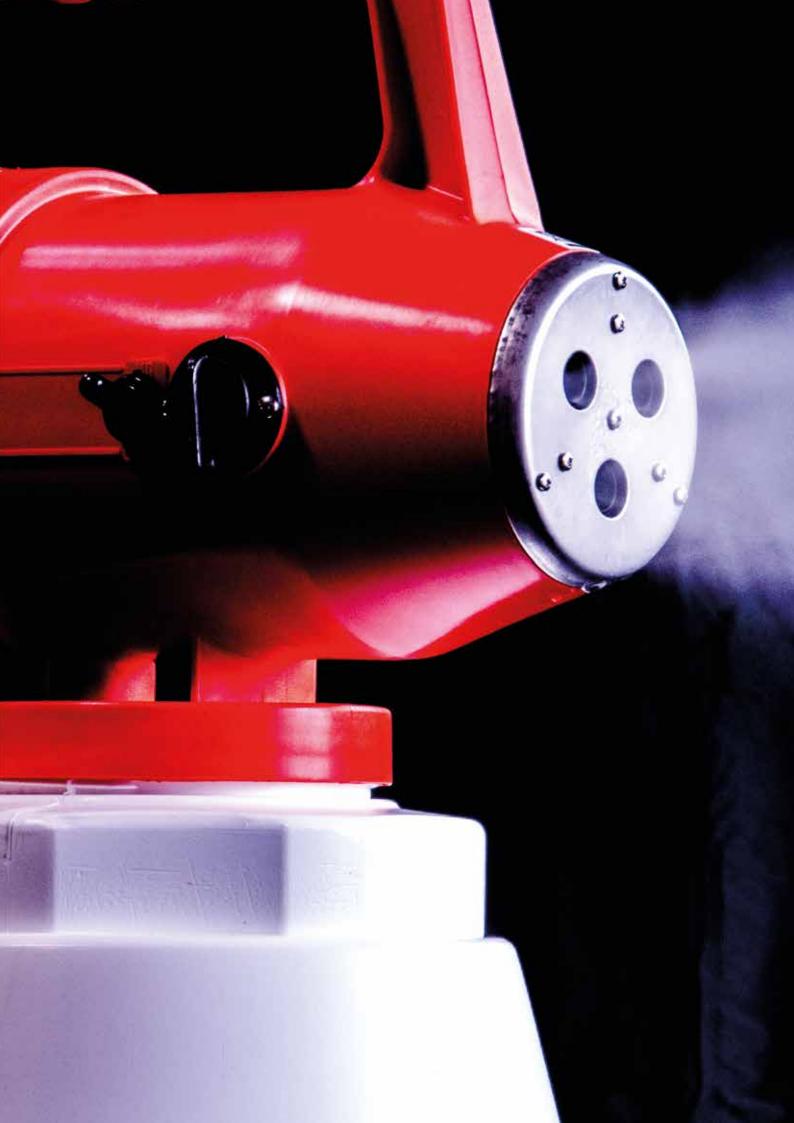

# Disinfection solutions

Drinking water disinfection	436
Surface disinfection	438
Room air disinfection	441
Swimming pool filter disinfection	444
Dosing systems	
Pump and tank set	446
Connection sets	447
Mobility equipment	448
Accessories	
Flushing units	452
Redox measuring units	450
Photometer	450
Packaging units	451
Fogging units	452
Drinking water hygiene test	453



# CONTI+ oXan<sup>™</sup> disinfection solutions

# PREVENTATIVE | PERMANENT | ACUTE

## Drinking water hygiene

The majority of today's drinking water installations are microbiologically compromised. Microbiologically compromised means that the entire drinking water installation has been contaminated by germs. This refers especially to legionella, pseudomonas and E. coli bacteria, with sometimes life threatening consequences for the public. If we consider hygiene in a wider context, a key role is also played by room hygiene, involving the "destruction of viruses, spores and bacteria; odour elimination and dust removal", as well as surface hygiene, involving the "sanitisation of work surfaces, transport surfaces and hands". Other CONTI+ oXan<sup>™</sup> disinfection solutions are available for these purposes.

## Causes

- · Contamination during and as a result of assembly
- Rough surfaces on water-bearing installation components
- Natural biofilm which can build up significantly as a result of contamination and become the ideal breeding ground for germs
- Failure to comply with/meet temperature specifications for cold and hot water installations
- Stagnation and reduced water flow or installation areas not being fully flushed
- Incorrectly performed procedural measures to reduce the number of germs leading to germs developing resistance

# **Application**

All these influencing factors can be kept under control through professional planning, correct implementation and proper operation of a drinking water installation, in accordance with normative requirements, guidelines, ordinances and laws. For good hygiene, it is crucial to take or initiate correct preventive measures from the outset, both permanently during operation and in acute cases, using the CONTI+ CNX Water Management System and CONTI+ oXan  $^{\rm TM}$  disinfectants.

CONTI+ oXan<sup>™</sup> zero disinfection solution for drinking water hygiene removes bacteria, viruses and algae without residue – pH neutral, non-toxic, harmless to humans and materials. Complies with the German Drinking Water Ordinance (TrinkwV) 2018, section 11. CONTI+ oXan<sup>™</sup> clean disinfection solution for surface hygiene is a preventive element in the drinking water hygiene concept. Tools, components and equipment are sanitised before use or deployment in the drinking water installation by spraying them with CONTI+ oXan<sup>™</sup> clean disinfection solution for surface hygiene.

# CONTI+ oXan<sup>™</sup> zero drinking water hygiene

Disinfection of drinking water installations at the same time as fully removing biofilm abrasively and without residue (microbiological decontamination) preventively, during operation and in acute cases.

CONTI+ oXan™ zero is provided as a **ready-to-use concentrate** for adding to a drinking water installation using a dosing system.

# CONTI+ oXan™ clean surface hygiene

Surfaces, tools and installation components as well as hand hygiene, especially when performing tasks involving drinking water. Approved by the VAH (German Association for Applied Hygiene) for surface disinfection in medical areas.

CONTI+ oXan<sup>™</sup> clean is available as a **ready-to-use solution** in spray bottles. You can also get different packing units with different filling quantities of **concentrate**, which can be mixed with water on site.

# CONTI+ oXan<sup>™</sup> fresh room hygiene

Surface and room air disinfection, odour elimination in the direct environment of use.

CONTI+ oXan™ fresh is available as a **ready-to-use solution** in spray bottles as well as in various bag-in-box pack sizes as a **concentrate**, which can be mixed with water on site as needed.

# CONTI+ oXan<sup>™</sup> prime pool filter hygiene

Sanitisation of swimming pool filters.

CONTI+ oXan<sup>™</sup> prime is available as a **ready-to-use concentrate**.



# Drinking water disinfection, Bag-in-Box



## CONTI+ oXan™ zero disinfectant, 20 litres bag-in-box

For drinking water disinfection according to § 11 of the Drinking Water Ordinance. CONTI+oXan™ zero for microbiological rehabilitation of drinking water installations and system disinfection according to DVGW W 557.

Conformity with drinking water regulation 2018. Residue-free elimination of microbiological contamination. Cleaning of drinking water installations by abrasive decomposition of biofilm.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **ready-to-use concentrate** with depot effect
- No bacterial resistance
- Pollutant-free and free of dangerous substances
- · No zytotoxicity
- No phytotoxicity
- Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark

Description	Filling quantity	Article number	EUR
CONTI+ oXan <sup>™</sup> zero Drinking water disinfection <b>Ready-to-use concentrate</b>	20 litres Bag-in-Box	CONB91200020	199,00

# Drinking water disinfection, IBC



## CONTI+ oXan™ zero disinfectant, 640/1000 litres IBC

For drinking water disinfection according to § 11 of the Drinking Water Ordinance. CONTI+oXan™ zero for microbiological rehabilitation of drinking water installations and system disinfection according to DVGW W 557.

Conformity with drinking water regulation 2018. Residue-free elimination of microbiological contamination. Cleaning of drinking water installations by abrasive decomposition of biofilm.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **ready-to-use concentrate** with depot effect
- · No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- · Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark

Description	Filling quantity	Article number	EUR
CONTI+ oXan™ zero	640 litres IBC	CONB91300640	6.365,00
Drinking water disinfection  Ready-to-use concentrate	1000 litres IBC	CONB91301000	9.955,00



# Surface disinfection, spray bottle





## CONTI+ oXan™ clean disinfectant, 100/500 ml spray bottle

CONTI+ oXan™ clean for disinfection of surfaces, tools, installation components, equipment and stacking ground as well as hands. Use in the construction and maintenance of drinking water installations. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral ready-to-use solution with depot effect
- No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- · No phytotoxicity
- · Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

## Remark:

Description	Filling quantity /Packing units	Article number	EUR
CONTI+ oXan™ clean	100 ml Spray bottle/PU 35 pieces	CONB92100101	218,00
Surface disinfection  Ready-to-use solution	500 ml Spray bottle/PU 12 pieces	CONB92100501	149,00

# Surface disinfection, Bag-in-Box





# CONTI+ oXan™ clean disinfectant, 10 litres Bag-in-Box

CONTI+ oXan™ clean for disinfection of surfaces, tools, installation components, equipment and stacking ground as well as hands. Use in the construction and maintenance of drinking water installations. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **concentrate** with depot effect
- No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark:

Description	Filling quantity	Article number	EUR
CONTI+ oXan™ clean Surface disinfection <b>Concentrate</b>	10 litres Bag-in-Box	CONB92200010	93,00



# Surface disinfection, IBC





## CONTI+ oXan<sup>™</sup> clean disinfectant, 640/1000 litres IBC

CONTI+ oXan™ clean for disinfection of surfaces, tools, installation components, equipment and stacking ground as well as hands. Use in the construction and maintenance of drinking water installations. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **concentrate** with depot effect
- No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- · No phytotoxicity
- Without solvents, alcohol, aldehydes and fragrances
- · Mucosa compatible

#### Remark

Description	Filling quantity	Article number	EUR
CONTI+ oXan™ clean Surface disinfection <b>Concentrate</b>	640 litres IBC	CONB92200640	5.973,00
	1000 litres IBC	CONB92201000	9.333,00



For disinfection of room air and room conditioning systems.

Destruction of fungal spores and germs. Odour elimination and dust removal.

Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral ready-to-use solution with depot effect
- · No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- · Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark





Description	Filling quantity /Packing units	Article number	EUR
CONTI+ oXan™ fresh	100 ml Spray bottle/PU 35 pieces	CONB93100101	218,00
Room air disinfectant  Ready-to-use solution	500 ml Spray bottle/PU 12 pieces	CONB93100501	168,00



# Room air and room conditioning system disinfectant, Bag-in-Box



# CONTI+ oXan<sup>™</sup> fresh disinfectant, 5/10 litres Bag-in-Box

For disinfection of room air and room conditioning systems. Destruction of fungal spores and germs. Odour elimination and dust removal. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **concentrate** with depot effect
- · No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- Without solvents, alcohol, aldehydes and fragrances
- · Mucosa compatible

#### Remark:

Description	Filling quantity	Article number	EUR
CONTI+ oXan™ fresh	5 litres Bag-in-Box	CONB93200005	116,00
Room air disinfectant <b>Concentrate</b>	10 litres Bag-in-Box	CONB93200010	234,00





# Swimming pool filter disinfection, Bag-in-Box



# CONTI+ oXan<sup>™</sup> prime disinfectant, 20 litres Bag-in-Box

For disinfection of swimming pool filters. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral **ready-to-use concentrate** with depot effect
- No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark:

Description	Filling quantity	Article number	EUR
CONTI+ oXan <sup>™</sup> prime Swimming pool filter disinfection <b>Ready-to-use concentrate</b>	20 litres Bag-in-Box	CONB94200020	249,00

# Swimming pool filter disinfection, IBC



# CONTI+ oXan™ prime disinfectant, 640/1000 litres IBC

For disinfection of swimming pool filters. Residue-free removal of microbiological contamination.

Effectiv against bactericidal, fungicidal, spurs, virus, algae.

- pH-neutral ready-to-use concentrate with depot effect
- · No bacterial resistance
- Pollutant-free and free of dangerous substances
- No zytotoxicity
- No phytotoxicity
- · Without solvents, alcohol, aldehydes and fragrances
- Mucosa compatible

#### Remark

Description	Filling quantity	Article number	EUR
CONTI+ oXan™ prime	640 litres IBC	CONB94300640	7.957,00
Swimming pool filter disinfection  Ready-to-use concentrate	1000 litres IBC	CONB94301000	12.444,00



# Dosing pump



## CONTI+ Dosing pump

Magnetic diaphragm dosing pump, mounted on a plastic dosing container with suction line, injection point and hose. Dosing of CONTI+ oXan™ zero disinfectant in drinking water installations in combination with CONTI+ connection set dosing system.

#### Technical data:

Display: coloured

Delivery rate: 9 l/h at 6 bar - 10 l/h at 3 bar

Power adjustment: stroke frequency adjustable 0–180 strokes/min

Material dosing head and valves: PVC

Control unit: 230 V/AC, 50/60 Hz

Electrical connection:

1.8 m mains cable with plug, Europe (at 230 V/AC)
Suction valve DN4/discharge valve DN4: double ball ceramic/PVDF/FPM (ball/seat/gasket)

Material suction connection: PVC

Suction connection: hose clamp connection set 4/6, 6/9 and 6/12

Material pressure connection: PVC

Pressure connection: hose clamp connection set 4/6, 6/9 and 6/12

Dosing head arrangement: Floor mounting

Suction line: Type SL-2 DN6 6/9 PVC with PVC hose 2.5 m Injection point: Type R DN4 d1-G1/2-d2-6/9 PVC/FPM Hose: 6/9 PE, length 5 m (P max. 10 bar) Colour: RAL 5012 light blue and black

Container: 35 I, closed, with adapter for container mounting

#### Dimensions container

Size/litre	Width	Height	Depth
35	approx. 320 mm	approx. 520 mm	approx. 320 mm
75	approx. 460 mm	approx. 645 mm	approx. 460 mm
100	approx. 460 mm	approx. 805 mm	approx. 460 mm
200	approx. 600 mm	approx. 900 mm	approx. 600 mm
300	approx. 670 mm	approx. 1050 mm	approx. 670 mm

#### Dimensions container with pump

Size/litre	Width	Height	Depth
35	approx. 320 mm	approx. 734 mm	approx. 320 mm
75	approx. 460 mm	approx. 859 mm	approx. 460 mm
100	approx. 460 mm	approx. 1019 mm	approx. 460 mm
200	approx. 600 mm	approx. 1114 mm	approx. 600 mm
300	approx. 670 mm	approx. 1264 mm	approx. 670 mm

Description	Filling volume	Article number	EUR
	35 litres	CONB11109035	2.618,00
	75 litres	CONB11109075	2.859,00
CONTI+ Dosing pump for Drinking water disinfection	100 litres	CONB11109100	3.118,00
	200 litres	CONB11109200	3.345,00
	300 litres	CONB11109300	3.845,00

# Connection set for dosing system



## CONTI+ Connection set for dosing system

Connection set for CONTI+ dosing system for dosing CONTI+ oXan™ zero in Drinking water installations.

## Technical data\_

Water meter DP 405-5 DN20 G1 Ms DN20

1 l/pulse Q max. = 5000 l/h readable T-piece reduced R1 – R 1/2 – R1 PN25 Socket M12x1 A-coded

Screw terminal connection 4-pole

DN25 Water meter DP 405-12 DN25 G1 1/4 Ms

1 l/pulse Q max. = 7880 l/h readable

T-piece reduced R1 1/4 - R1/2 - R1 1/4 PN25

Socket M12x1 A-coded

Screw terminal connection 4-pole

DN32 Water meter DP 405-5 DN32

> 1 l/pulse Q max. = 10.000 l/h readable T-piece reduced R1 1/2 - R1/2 - R1 1/2 PN25

Socket M12x1 A-coded

Screw terminal connection 4-pole

DN40 Water meter DP 405-20 DN40 G2 Ms

> 1 l/pulse Q max. = 20.000 l/h readable T-piece reduced R2 – R1/2 – R2 PN25

Socket M12x1 A-coded


Screw terminal connection 4-pole

Water meter DP 405-30 DN50 G2 1/2 Ms **DN50** 

> 1 l/pulse Q max. = 31.250 l/h readable T-piece reduced R2 1/2 - R1 - R2 1/2 PN25 Reduction nipple R 1 (AG) – Rp 1/2 (IG))

Socket M12x1 A-coded

Screw terminal connection 4-pole



Nominal Width (Dimensions in mm)	DN	20	25	40	50
Overall length (DIN ISO 4064)	L	190	260	300	270
Overall length with screw connection	L2	288	378	438	_
Height	Н	35	45	50	52
Height 1	H1	120	125	140	142
Diameter Ø	В	96	102	137	137

Description	Connection	Article number	EUR
CONTI+ Connection set Dosing system	DN20	CONB25204050	800,00
	DN25	CONB25254050	913,00
	DN32	CONB25324050	1.195,00
	DN40	CONB25404050	1.529,00
	DN50	CONB25504050	2.314,00



# Hand truck for mobile dosing unit



# CONTI+ Hand truck for dosing system

Hand truck with pre-mounted spill protection container for mobilizing the CONTI+ dosing system.

- · Load capacity: 300 kg
- Pneumatic tyres
- Safety handles and sheet steel shovel
- Tubular steel frame with skids

Dimensions hand truck with pre-mounted spill protection:

Size/litre	Width	Height	Depth
35	approx. 580 mm	approx. 1300 mm	approx. 1012 mm
75	approx. 580 mm	approx. 1300 mm	approx. 1102 mm
100	approx. 580 mm	approx. 1300 mm	approx. 1102 mm
200	approx. 640 mm	approx. 1300 mm	approx. 1240 mm
300	approx. 758 mm	approx. 1300 mm	approx. 1358 mm



Example:	Δnn	lication

Description	Protection container	Article number	EUR
	35 litres	CONB26420035	4.593,00
	75 litres	CONB26500075	4.354,00
CONTI+ Hand truck for dosing system	100 litres	CONB26500100	4.093,00
	200 litres	CONB26650200	3.866,00
	300 litres	CONB26770300	3.365,00

# Mobile dosing unit, currentless



#### Note:

Bag-in-Box not in scope of delivery

# CONTI+ Mobile dosing unit, currentless, with connecting set 0,3-6 bar

Currentless proportional dosing of CONTI+ oXan™ zero in drinking water installations.

- Hand truck with three hard rubber wheels each, also for coping with steps
- · Electroless dosing pump
- Connection set with flexible hoses and tap
- Unit can be completely dismantled for transport

## Technical data:

hydraulic differential piston engine, self-priming 0.03-25 % Dosing range: Pressure range: 0.3-6 bar 10-3,000 l/h Water flow rate: Dosing feed: 0.003-300 l/h Pressure loss: 0.2-2.3 bar Drive water temperature (max.): 40 °C 5°C Drive water temperature (min.): Suction height (max.): 4 m

Description	Article number	EUR
CONTI+ Mobile dosing unit	CONB13036000	3.068,00



# Redox measuring unit, with temperature measurement



## CONTI+ Redox and pH measuring unit, with temperature measurement

Redox and pH measuring unit with temperature measurement for the determination of redox potential, pH value and water temperature

- LC Display with Battery status
- · Hold-button for value fixing
- Auto-off funktion (after 8 min)
- · Waterproof and swimmable
- Factory calibration, changeable electrode

#### Technical data:

Redox potential measuring range:  $\pm$  1000 mV Redox potential measuring resolution: 1 mV Redox potential accuracy:  $\pm$  2 mV Temperature measuring range: -5,0 to 60 °C Temperature measuring resolution: 0,1 °C Temperature accuracy:  $\pm$  0,5 °C Battery type: 1,5 V Dimensions (WXHxD):  $\pm$  40x163x26 mm

Weight: 0,1 kg

, -

#### Note:

Measuring unit may need to be calibrated before use.

Description	Version	Article number	EUR
CONTI+ Redox measuring unt	with temperature measurement	CONB21000010	796,00

## Photometer



## CONTI+ photometer for the determination of DPD, pH value

CONTI+ photometer for the determination of free active chlorine (DPD measurement), bound or total chlorine and pH value of drinking and swimming pool water.

Bluetooth 4.0 for wireless synchronisation of measurement results with computer or smartphone via software or app.

#### Consisting of:

- · Storage box, waterproof
- Photometer, light protection cap
- Stirring rod, syringe and 3 x AAA batteries
- Reagent tablets 30 x DPD N° 1
- 10 x DPD N° 3, 20 x Phenol Red, 10 x CYA-Test
- 10 x Alkalinity-M

#### Technical data:

Temperatur Messbereich: 5–45 °C Dimensions (WxHxD): 70x260x130 mm

Schutzart: IP68

Description	Version	Article number	EUR
CONTI+ Photometer	digital	CONB21000020	579,00



# Packaging units CONTI+ oXan<sup>™</sup> Disinfectants

Packaging	Pieces per Box	Boxes per Layer	Layer per Palette	Pieces per Palette
100 ml Spray bottle	35	12	6	2520
500 ml Spray bottle	12	9	4	432

Packaging	Pieces per layer	Layers per pallet	Pieces per pallet
5 litres Bag-in-Box	24	4	96
10 litres Bag-in-Box	24	2	48
20 litres Bag-in-Box	12	1	12
640 litres IBC	-	-	1
1000 litres IBC	-	-	1



# Car fogging unit



# CONTI+ Car fogging unit, adjustable nozzle

For disinfection of vehicle cabins, closed freight hold and rooms up to 100 cbm.

- Handle with ball valve for switching off compressed air
- Rack can be hooked into the vehicle window or used as a stand
- · Disinfectant container
- · Compressed air hose, adjustable nozzle

## Technical data:

Operating pressure: 2.5 bar
Tank size: 1 l
Flow rate (approx.): 80 ml/5 min
Air consumption spray (approx.): 100 l/min
Compressed-air hoses connection: 7.2 NW

Description	Version	Article number	EUR
CONTI+ Car fogging device for room air disinfectant solution	adjustable nozzle	CONB22000430	1.722,00

# Cold fogger for room air disinfectant, 3 nozzles



## CONTI+ Cold fogger for room air disinfectant

ULV fogger for disinfectant for room hygiene - 3 nozzles.

- Ultra-low-volume Aerosol fogger
- Plug-and-Play-system
- 3 nozzles
- · With integrated dosing t-piece
- Droplet size adjustable: 5-50 μm
- Robust construction
- Main supply 230 V

## Technical data:

Throw distance (max.): approx. 10 m Container size: 5 l Flow rate (max.): 19 l/h Net weight: 3 kg

Description	Version	Article number	EUR
CONTI+ old fogger for room air disinfectant solution	3 nozzles	CONB22031019	1.326,00

# Drinking water hygiene test – bacteria, fungi and yeasts



Drinking water hygiene test, total germ count and detection, 1 piece/10 pieces

Quantitative total microbial count CFU of bacteria, fungi and yeasts on the basis of comparative images.

- Suitable for liquids, surfaces and powder
- Lidded container with integrated immersion nutrient trays
- Yellow side for quantitative determination of total bacterial count
- Pink side for the detection of fungi and yeasts

#### Note

The drinking water hygiene test is not an accredited procedure.

	1			
Description	Application	Quantity	Article number	EUR
Drinking water bygions test	Total microbial count	1 piece	CONB37001301	28,00
Drinking water hygiene test	and detection	10 pieces	CONB37001311	201,00





# Index of article numbers

Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
100.040.11	461,00	250	110 270 00	644,00	296	120.116.11	522,00	241
	472,00			618,00			547,00	
	502,00			720,00			599,00	
	526,00			696,00			620,00	
	531,00			696,00			628,00	
	553,00			668,00		120 129 11	652,00	244
	489,00			772,00			627,00	
	510,00			749,00			648,00	
	577,00			685,00			580,00	
	600,00			700,00			604,00	
	606,00			685,00			504,00	
	628,00			700,00			538,00	
	562,00			794,00			535,00	
	583,00			883,00			492,00	
	490,00			662,00			601,00	
	445,00			525,00			590,00	
	536,00			662,00			611,00	
	559,00			662,00			585,00	
	515,00			547,00			573,00	
	536,00			554,00			596,00	
	545,00			577,00			589,00	
	564,00			554,00			575,00	
	501,00			576,00			599,00	
	525,00			603,00			572,00	
	591,00			511,00			558,00	
	614,00			603,00			580,00	
	620,00			603,00			628,00	
	643,00			535,00			617,00	
	575,00			583,00			641,00	
	599,00			606,00			613,00	
	502,00			616,00		120.381.11	601,00	287
100.156.11	459,00	250		638,00			624,00	
100.160.11	551,00	251	120.030.11	614,00	244	120.470.11	643,00	287
	572,00		120.031.11	635,00	244	120.471.11	629,00	287
100.310.00	418,00	289	120.036.11	568,00	244	120.472.11	654,00	287
100.311.00	418,00	289	120.037.11	592,00	244	120.480.11	626,00	287
100.312.00	418,00	289	120.040.01	628,00	242	120.481.11	614,00	287
100.320.00	468,00	289	120.040.11	492,00	240	120.482.11	635,00	287
100.321.00	468,00	289	120.040.22	628,00	242	121.010.11	640,00	245
100.322.00	468,00	289		628,00			661,00	
100.330.00	405,00	289		522,00			894,00	
100.331.00	405,00	289		520,00			916,00	
100.332.00	405,00	289		560,00			909,00	
	454,00			478,00			933,00	
	454,00			560,00			653,00	
	454,00			560,00			674,00	
	558,00			406,00			906,00	
	536,00			436,00			930,00	
	611,00			393,00			924,00	
	587,00			373,00			945,00	
	657,00			404,00			366,00	
	630,00			360,00			396,00	
	733,00			540,00			352,00	
	733,00			560,00			335,00	
	709,00			568,00			364,00 319,00	
	683,00			592,00				
	786,00 760,00			568,00 590,00			646,00 675,00	
110.201.01	7 00,00	271	120.111.11	390,00	∠4 1	131.010.1100	0/5,00	309

Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
131.816.11CO	639,00	309	164.056.11	513,00	285	550.037.32	19,00	330
	293,00			112,00		550.037.32		
133.050.11	322,00	263		459,00		550.041.00	128,00	326
	279,00			459,00		550.041.00		
	652,00			409,00		550.041.00		
	678,00			459,00		550.042.00		
	635,00			459,00		550.042.00		
	710,00			459,00		550.043.00		
	738,00			459,00		550.043.00		
	619,00		220.016.33	409,00	355	550.044.00		
	647,00			409,00		550.044.00		
	603,00			90,00		550.044.00		
	685,00			112,00		550.044.12		
	716,00			85,00		550.044.12		
	1.549,00			391,00		550.044.12		
161.000.11	443,00	225		422,00		550.044.32		
	463,00			442,00		550.044.32		
	428,00			90,00		550.044.32		
	409,00			513,00		550.045.00		
	431,00			513,00		550.045.00		
161.056.11	396,00	224		513,00		550.045.00		
	627,00			513,00		550.046.30		
	538,00		260.016.31	467,00	352	550.046.30		
162.000.22	627,00	232		467,00		550.067.11		
	627,00		391.058.00	37,00	233	550.069.11		
	557,00		550.000.05	34,00	328	550.071.00	25,00	262
162.008.11	580,00	227		7,00		550.095.00		
	603,00			10,00		CONB11109035	2.618,00	446
162.010.11	554,00	227	550.003.11	8,00	334	CONB11109075	2.859,00	446
162.011.11	577,00	227		10,00		CONB11109100	3.118,00	446
	610,00		550.005.11	7,00	334	CONB11109200	3.345,00	446
162.016.11	520,00	227		8,00		CONB11109300	3.845,00	446
162.016.22	610,00	232	550.010.00	8,00	333	CONB13036000	3.068,00	449
162.016.44	610,00	232		18,00		CONB21000010	796,00	450
162.017.11	543,00	227		9,00		CONB21000020	579,00	450
	585,00			23,00		CONB22000430		
162.040.11	503,00	226		23,00		CONB22031019	1.326,00	452
	585,00			8,00		CONB25204050	800,00	447
162.040.44	585,00	231	550.011.11	23,00	359	CONB25254050	913,00	447
	548,00			24,00	359	CONB25324050	1.195,00	447
162.050.11	522,00	226	550.013.11		359	CONB25404050		
	571,00			26,00		CONB25504050		
162.056.11	488,00	226		28,00		CONB26420035		
	571,00		550.016.11	on request	332	CONB26500075		
	571,00			30,00		CONB26500100		
	626,00			26,00		CONB26650200		
	647,00			61,00		CONB26770300		
	579,00			79,00		CONB37001301		
	785,00			79,00		CONB37001311		
	805,00			85,00		CONB91200020		
	591,00			85,00		CONB91300640		
	635,00			48,00		CONB91301000		
	608,00			97,00		CONB92100101		
	575,00			85,00		CONB92100501		
	666,00			7,00		CONB92200010		
	837,00			7,00		CONB92200640		
	529,00			15,00		CONB92201000		
164.048.11	574,00	285	550.037.12	15,00	361	CONB93100101	218,00	441

# Index of article numbers

Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
CONB93100501	168,00	441	CONE0212211230	1.637,00	63	CONE2115211100	1.051,00	85
CONB93200005	116,00	442	CONE0212211240			CONE2115211140	1.204,00	85
CONB93200010	234,00	442	CONE0212211336			CONE2115211200	1.051,00	85
CONB94200020	249,00	444	CONE0212211360			CONE2115211210	1.118,00	85
CONB94300640			CONE0231211100	1.120,00	65	CONE2115211230		
CONB94301000	12.444,00	445	CONE0231211140			CONE2115211240	1.204,00	85
CONE0110173100	602,00	77	CONE0231211200			CONE2115211336	1.276,00	85
CONE0110173200	658,00	77	CONE0231211210			CONE2115211360		
CONE0111211100	1.280,00	63	CONE0231211230			CONE2116211100	875,00	91
CONE0111211140	1.435,00	63	CONE0231211240			CONE2116211140		
CONE0111211150	2.948,00	69	CONE0231211336			CONE2116211200	875,00	91
CONE0111211200	1.280,00	63	CONE0231211360			CONE2116211210	939,00	91
CONE0111211210	1.347,00	63	CONE0232211100			CONE2116211230	1054,00	91
CONE0111211230	1.500,00	63	CONE0232211140	1.435,00	65	CONE2116211240	1028,00	91
CONE0111211240	1.435,00	63	CONE0232211200	1.280.00	65	CONE2116211336	1097,00	91
CONE0111211250	2.948,00	69	CONE0232211210	1.347,00	65	CONE2116211360	1155,00	91
CONE0111211336	1.758,00	63	CONE0232211230	1.500,00	65	CONE2117211100	875,00	95
CONE0111211356	3.015,00	69	CONE0232211240	1.435,00	65	CONE2117211140	1.028,00	95
CONE0111211360	1.816,00	63	CONE0232211336	1.758,00	65	CONE2117211200	875,00	95
CONE0112211100	1.416,00	63	CONE0232211360	1.816,00	65	CONE2117211210	939,00	95
CONE0112211140	1.700,00	63	CONE241321270	1.069,00	105	CONE2117211230	1.054,00	95
CONE0112211200	1.507,00	63	CONE241521270	1.211,00	107	CONE2117211240		
CONE0112211210	1.485,00	63	CONE241621270			CONE2117211336	1.097,00	95
CONE0112211230	1.637,00	63	CONE241721270	963,00	111	CONE2117211360	1.155,00	95
CONE0112211240	1.655,00	63	CONE0711211270	1.828,00	79	CONE2150171100	373,00	103
CONE0112211336	1.894,00	63	CONE0712211270	2.235,00	79	CONE2150171200	373,00	103
CONE0112211360	1.954,00	63	CONE0831211270			CONE2150181100	694,00	103
CONE0131211100	1.120,00	65	CONE0832211270	2.039,00	81	CONE2154211100	1.007,00	89
CONE0131211140	1.418,00	65	CONE0731211270	1.804,00	81	CONE2154211140	1.160,00	89
CONE0131211200	1.114,00	65	CONE0732211270	2.039,00	81	CONE2154211200		
CONE0131211210	1.103,00	65	CONE0811211270	1.828,00	79	CONE2154211210	1.023,00	89
CONE0131211230			CONE0812211270			CONE2154211230		
CONE0131211240			CONE1111219568			CONE2154211240		
CONE0131211336			CONE1111219500			CONE2154211336		
CONE0131211360			CONE1111219580			CONE2154211360		
CONE0132211100			CONE1211219500			CONE2156211100		
CONE0132211140			CONE1211219580			CONE2156211140		
CONE0132211200			CONE1211219568			CONE2156211200		
CONE0132211210			CONE2110173100			CONE2156211210		
CONE0132211230			CONE2110173200			CONE2156211230		
CONE0132211240			CONE2113211100			CONE2156211240		
CONE0132211336	1.758,00	65	CONE2113211140			CONE2156211336		
CONE0132211360	1.816,00	65	CONE2113211200	1.051,00	83	CONE2156211360		
CONE0211211100			CONE2113211210			CONE2157211100		
CONE0211211140			CONE2113211230			CONE2157211140		
CONE0211211150			CONE2113211240			CONE2157211200		
CONE0211211200			CONE2113211336			CONE2157211210		
CONE0211211210			CONE2113211360			CONE2157211230		
CONE0211211230			CONE2114211100			CONE2157211240		
CONE0211211240			CONE2114211140			CONE2157211336		
CONE0211211250			CONE2114211200			CONE2157211360		
CONE0211211336			CONE2114211210			CONE3110173100		
CONE0211211356			CONE2114211230			CONE3110173200	,	
CONE0211211360			CONE2114211240			CONE3518178100	,	
CONE0212211100			CONE2114211336			CONE3518178120	,	
CONE0212211140			CONE2114211360			CONE3518178200		
CONE0212211200			CONE2115133100			CONE3518178220		
CONE0212211210	1.485,00	63	CONE2115133200	624,00	101	CONE3519178100	599,00	292

Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
CONE3519178120 .	633.00	294	CONE8150208100	710.00	239	CONM2113214020	716.00	132
CONE3519178200 .			CONE8150208200			CONM2113215000		
CONE3519178220.			CONE8150308538			CONM2113215020		
CONE4111221109.			CONH0113100012			CONM2113216000	812,00	136
CONE4111221209.	1.080,00	73	CONH0213000000			CONM2113216020	907,00	136
CONE4131221109.	924,00	75	CONH0313000000			CONM2114214000	541,00	138
CONE4131221209.	924,00	75	CONH0413100015	0237,00	196	CONM2114214020	636,00	138
CONE4132221109.	1.080,00	75	CONH05000000000			CONM2114216000	735,00	140
CONE4132221209.			CONH0500000100	0806,00	206	CONM2114216020		
CONE5118221100.	5.357,00	119	CONH1413100010	0184,00	196	CONM2115214000		
CONE5218221100 .			CONH1413100020			CONM2115214020		
CONE5318221100 .	6.469,00	119	CONH1413100025			CONM2115215000		
CONE5418123100 .			CONH1413100030			CONM2115215020		
CONE5518123100 .			CONH1413100040			CONM2115216000		
CONE5618123100 .			CONH1413300010			CONM2115216020		
CONE7116211100 .			CONH1413300020			CONM2116214000		
CONE7116211200 .	1.039,00	275	CONH1413300025			CONM2116214020		
CONE7116211336 .	1.230,00	2/5	CONH1413300030			CONM2116216000		
CONE7116211360 .			CONH1413300040			CONM2116216020		
CONE7116218100 .			CONH2113600000			CONM2117214000		
CONE7116218200 .			CONH2113700000			CONM2117214020 CONM2117216000		
CONE7116218336 . CONE7116218360 .			CONH22136000150 CONH22136000240			CONM2117216000 CONM2117216020		
CONE7117211100 .			CONH2213700015			CONM2150174000		
CONE7117211100 .			CONH22137000130			CONM2150174000 CONM2150184000		
CONE7117211200 .			CONM0111214000			CONM2154214000		
CONE7117211360 .			CONM0111214002	1 192 00	125	CONM2154214020		
CONE7117218100 .			CONM0111216000			CONM2154216000		
CONE7117218200 .	1.328.00	271	CONM0111216002			CONM2154216020		
CONE7117218336.			CONM0112214000			CONM2156214000		
CONE7117218360.			CONM0112214002			CONM2156214020		
CONE7156211100.	965,00	277	CONM0112216000	1.519,00	129	CONM2156216000	614,00	145
CONE7156211200.			CONM0112216002			CONM2156216020		
CONE7156211336.			CONM0131214000			CONM2157214000		
CONE7156211360.			CONM0131214002			CONM2157214020		
CONE7156218100 .			CONM0131216000			CONM2157216000		
CONE7156218200 .	1.306,00	269	CONM0131216002			CONM2157216020		
CONE7156218336 .	1.455,00	269	CONM0132214000			CONM3364100000		
CONE7156218360 .			CONM0132214002			CONM3367100000		
CONE7157211100 .			CONM0132216000			CONM4150216000		
CONE7157211200 .			CONM0132216002			CONM4150414000		
CONE7157211336 . CONE7157211360 .			CONM0211214000 CONM0211214002			CONM4159214000 CONM4159414000		
CONE7157211300 .			CONM0211214002			CONM4664100000		
CONE7157218100 .			CONM0211216002			CONM4667100000		
CONE7157218336 .			CONM0217210002			CONM8110104000		
CONE7157218360 .			CONM0212214002			CONM8110204000		
CONE7312201200 .			CONM0212216000			CONM8150104000		
CONE7312201336.			CONM0212216002			CONM8150204000		
CONE7312201360.			CONM0231214000			CONM9164000000		
CONE7313201200.	4.097,00	303	CONM0231214002	1.112,00	127	CONM9164000000		
CONE7313201336.	3.192,00	303	CONM0231216000	1.549,00	131	CONM9164000100	0191,00	217
CONE7313201360 .			CONM0231216002	1.446,00	131	CONM9164000100		
CONE7352218100 .			CONM0232214000			CONM9260400001		
CONE7353218100 .			CONM0232214002			CONM9260400002		
CONE7354218100 .			CONM0232216000			CONM9260400002		
CONE7355218100 .			CONM0232216002			CONM9260400003		
CONE7356218100 .	19.807,00	305	CONM2113214000		132	CONM9260400004	u3.3/5,00	214

# Index of article numbers

COMMARCAGNODIOLIS.   1164.00   715   CONQ214641   275.00   135   COMORTAGOD.   173.00   344   COMMARCAGNODIOLIS.   271.100   215   CONQ2120000   144.00   177   COMORTAGOD.   77.00   345   CONQ010000   175.00   184   COMOZCOGOD.   144.00   177   COMORTAGOD.   77.00   345   CONQ010010   175.00   184   COMOZCOGOD.   149.00   175   COMORTAGOD.   77.00   345   CONQ010010   175.00   184   COMOZCOGOD.   67.00   35   COMORTAGOD.   77.00   345   CONQ010010   418.00   190   COMOZCOGOD.   67.00   35   CONQ087000   77.00   345   CONQ010000   418.00   190   CONQ260000   67.00   331   CONQ0870000   77.00   345   CONQ010000   418.00   190   CONQ260000   67.00   331   CONQ0870000   77.00   345   CONQ010000   418.00   190   CONQ0260000   117.00   174   CONR0111   763.00   159   CONQ010088.   57.00   389   CONQ020000   166.00   176   CONR0112   769.00   158   CONQ020000   248.00   188   CONQ020000   154.00   173   CONR0112   729.00   158   CONQ020000   248.00   188   CONQ020000   346.00   173   CONR0112   201.00   159   CONQ020000   448.00   191   CONQ030000   259.00   174   CONR0111   357.00   169   CONQ020000   448.00   191   CONQ030000   259.00   174   CONR0111   357.00   160   CONQ020000   448.00   191   CONQ030000   259.00   176   CONR8111   357.00   160   CONQ030000   248.00   191   CONQ030000   259.00   176   CONR8111   357.00   160   CONQ030000   444.00   189   CONQ030000   259.00   162   CONR0110000   248.00   160   CONQ030000   249.00   162   CONR0110000   249.00   163   CONR0110000   249.00   164   CONR011000000   249.00   164   CONR011000000   249.00   164   CONR0110000000   249.00   165   CONR0110000000000000000000000000000000000	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
COMM995040011025 _ 271,00 _ 215	CONM9260400101	51.164.00	215	CONO214641	275 00	175	CONO871400	173.00	344
COMMOPSEGRAPHICAL ST. 2711,00 . 175,00 . 184 CONO220000 . 149,00 . 177 CONOB78000. 77,00 . 344 CONOD10100 . 175,00 . 184 CONO260000 . 67,00 . 35 CONOB78000. 173,00 . 344 CONOD10100 . 175,00 . 184 CONO260000 . 67,00 . 35 CONOB78000. 173,00 . 344 CONOD10600 . 418,00 . 190 CONO260000 . 67,00 . 331 CONOB78000. 77,00 . 345 CONOD10600 . 418,00 . 190 CONO260000 . 170,00 . 345 CONOB78000. 77,00 . 345 CONOD10600 . 418,00 . 190 CONO260000 . 117,00 . 174 CONOD111 . 263,00 . 159 CONOD10808 . 52,00 . 188 CONO327000 . 116,00 . 176 CON0D111 . 263,00 . 158 CONO20000 . 248,00 . 188 CONO327000 . 154,00 . 173 CONNETI . 201,00 . 159 CONO20000 . 248,00 . 188 CONO327000 . 346,00 . 173 CONNETI . 201,00 . 159 CONO20000 . 248,00 . 188 CONO327000 . 346,00 . 173 CONNETI . 201,00 . 159 CONO20000 . 468,00 . 191 CONO330000 . 259,00 . 174 CONRETI . 357,00 . 160 CONO20000 . 468,00 . 191 CONO330000 . 259,00 . 174 CONRETI . 357,00 . 160 CONO20000 . 468,00 . 191 CONO330010 . 257,00 . 174 CONRETI . 350,00 . 160 CONO20000 . 244,00 . 189 CONO410010 . 54,00 . 176 CONRETI . 350,00 . 160 CONO20000 . 244,00 . 189 CONO51000 . 352,00 . 163 CONNETI . 350,00 . 174 CONO30000 . 210,00 . 189 CONO51000 . 352,00 . 163 CONO100000 . 244,00 . 192 CONO511000 . 192,00 . 162 CONTO112120415 . 578,00 . 417 CONO50000 . 444,00 . 192 CONO511000 . 192,00 . 162 CONTO112120415 . 578,00 . 417 CONO50000 . 344,00 . 193 CONO51000 . 352,00 . 163 CONTO112120415 . 578,00 . 417 CONO50000 . 378,00 . 185 CONO55000 . 499,00 . 163 CONTO112120415 . 578,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 163 CONTO112120415 . 578,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 163 CONTO1121210415 . 578,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 164 CONTO1121210415 . 578,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 163 CONTO1121210415 . 578,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 164 CONTO112110330 . 340,00 . 416 CONO50000 . 175,00 . 185 CONO55000 . 499,00 . 164 CONTO1121110330 . 349,00 . 426 CONO50000 . 175,00 . 186 CONO50000 . 499,00 . 499 CO									
CONDOID000. 175,00. 184 CONO22000. 149,00. 29 CONO874000. 77,00. 345 CONO010000. 175,00. 184 CONO20000. 67,00. 175 CONO875000. 172,00. 344 CONO100400. 418,00. 190 CONO260000. 67,00. 175 CONO875000. 148,00. 344 CONO101000. 418,00. 190 CONO260000. 117,00. 174 CONO87700. 77,00. 345 CONO010100. 418,00. 190 CONO30000. 117,00. 174 CONO87700. 77,00. 345 CONO010100. 418,00. 180 CONO32000. 116,00. 176 CONO0111. 263,00. 159 CONO20000. 248,00. 188 CONO322000. 156,00. 176 CONO010000. 222,00. 188 CONO322000. 346,00. 173 CONR0111. 506,00. 158 CONO20000. 468,00. 191 CONO30000. 259,00. 174 CONR0111. 337,00. 160 CONO20000. 468,00. 191 CONO30000. 259,00. 174 CONR0111. 337,00. 160 CONO20000. 268,00. 193 CONO30000. 259,00. 174 CONR0111. 337,00. 160 CONO20000. 268,00. 193 CONO30000. 259,00. 174 CONR0111. 337,00. 160 CONO20000. 268,00. 193 CONO30000. 259,00. 174 CONR0111. 340,00. 161 CONO30010. 468,00. 191 CONO30010. 55,00. 176 CONR0111. 480,00. 161 CONO30010. 444,00. 192 CONO51000. 252,00. 176 CONR0111. 480,00. 161 CONO30010. 444,00. 192 CONO51000. 252,00. 163 CONR01121. 267,00. 417 CONO40000. 444,00. 192 CONO51000. 252,00. 163 CONR01121. 267,00. 417 CONO40000. 444,00. 192 CONO51000. 459,00. 162 CONO51000. 459,00. 163 CONR012121040. 367,00. 418 CONO50000. 757,00. 185 CONO51000. 459,00. 164 CONO51000. 757,00. 185 CONO51000. 459,00. 164 CONO51000. 757,00. 186 CONO51000. 459,00. 164 CONO51000. 175,00. 1									
CONDOIDIONO. 175,00 184 CNO266000 67,00 175 CON0875000 173,00 344 CON1010000. 418,00 190 CNO266000 67,00 175 CON0875000 174,00 345 CON0010000. 418,00 190 CNO266000 170,00 170 CNO267000 177,00 345 CON0010000. 418,00 190 CNO266000 170,00 170 CNO111 263,00 159 CNO020000 248,00 188 CNO232000 166,00 176 CON00112 263,00 158 CNO020000. 248,00 188 CNO322000 346,00 173 CONR112 505,00 158 CNO020000. 448,00 188 CNO322000 346,00 173 CONR112 201,00 159 CNO020000. 468,00 191 CNO330000 259,00 174 CON8311 337,00 160 CNO020000. 468,00 191 CNO330000 259,00 174 CON8311 337,00 160 CNO020000. 468,00 191 CNO330000 259,00 174 CON8312 353,00 160 CNO020000. 468,00 191 CNO330000 259,00 176 CON86111 248,00 161 CNO030000. 468,00 191 CNO030000 250,00 176 CON86111 248,00 161 CNO030000. 468,00 191 CNO030000 250,00 176 CON86111 248,00 161 CNO030000. 444,00 189 CNO0410010 54,00 176 CON86111 248,00 161 CNO030000. 444,00 189 CNO0510000 252,00 163 CNOS115500000 211,00 364 CNO040000. 444,00 192 CNO0511000 152,00 162 CNO1071211210415 578,00 417 CNO040001. 444,00 192 CNO0511000 499,00 163 CNOT07121210415 CNO050000. 175,00 185 CNO050000 789,00 161 CNO07071211210415 S78,00 417 CNO050000. 175,00 185 CNO050000 789,00 161 CNO07071211210415 S78,00 417 CNO050000. 175,00 185 CNO050000 789,00 121 CNOT07121210830 S06,00 416 CNO050000. 175,00 185 CNO050000 497,00 164 CNOT07121130305 S06,00 416 CNO050000. 175,00 185 CNO050000 497,00 164 CNO0707121130305 S06,00 416 CNO050000. 175,00 185 CNO050000 497,00 160 CNO050000. 175,00 186 CNO050000 497,00 160 CNO050000. 175,00 186 CNO050000 497,00 175 CNO050000 317,00 185 CNO050000 497,00 170 CNO050000 317,00 185 CNO050000 319,00 497,00 164 CNO070712112103005 S06,00 416 CNO050000 317,00 186 CNO050000 497,00 170 CNO050000 317,00 318 CNO050000 319,00 497,00 318 CNO050000 319,00 319,00 319,00 319,00 319,00 319,00 319,00 319,00 319,0					,				
CONDOITO06.0 418.00 190 COND250000. 67.00 313 COND875000. 77,00 345 COND010100. 418.00 190 COND250000. 67.00 313 COND875000. 77,00 345 COND010100. 418.00 190 COND310000. 117,00 174 COND0111. 255.00 159 COND010100. 418.00 188 COND020000. 166.00 176 COND01101. 225.00 188 COND020000. 366.00 173 CONRT112. 506,00 158 COND020010. 222.00 188 COND020000. 366.00 173 CONRT112. 201,00 159 COND020000. 448.00 191 COND0330000. 259.00 174 CONRS111. 337,00 160 COND020000. 448.00 191 COND0330000. 259.00 174 CONRS111. 353,00 160 COND020000. 448.00 191 COND0330000. 259.00 174 CONRS111. 353,00 160 COND020000. 448.00 191 COND0330000. 259.00 176 CONRS111. 353,00 160 COND020000. 201,00 189 COND011000. 52,00 176 CONRS111. 248,00 151 COND030000. 201,00 189 COND011001. 540.00 176 CONRS111. 248,00 151 COND030000. 201,00 189 COND011001. 540.00 176 CONRS111. 248,00 151 COND030000. 444,00 192 COND511000. 192.00 162 COND1110415. 578,00 417 COND040010. 444,00 192 COND511000. 459.00 163 COND11200402. 367,00 418 COND050000. 175,00 185 COND512000. 459.00 163 COND11212004020. 367,00 418 COND050010. 317,00 185 COND512000. 459.00 163 COND0301212004020. 367,00 418 COND050010. 317,00 185 COND512000. 459.00 163 COND031212103035. 342,00 419 COND051010. 317,00 185 COND512000. 459.00 163 COND03121210303. 342,00 419 COND051010. 317,00 185 COND51000. 198.00 162 COND0512110310. 274,00 426 COND051010. 317,00 186 COND051000. 198.00 162 COND0512110310. 274,00 426 COND051010. 317,00 186 COND051000. 423.00 120 COND0521110310. 274,00 426 COND051010. 317,00 186 COND051000. 479.00 120 COND05211110310. 274,00 426 COND051010. 205,00 187 COND051000. 479.00 120 COND05211110310. 274,00 426 COND051010. 317,00 186 COND051000. 479.00 120 COND05211110310. 274,00 426 COND051010. 205,00 187 COND051000. 479.00 180 COND052000. 47									
CONDO10000. 418.00. 190 COND260000. 177.00 1744 CONR07100. 777.00 345 CONO010000. 418.00. 199 COND310000. 177.00 1744 CONR07111. 263.00. 159 COND010088. 5.20.0 389 COND320000. 166.00 176 CONR07112. 508.00 158 COND020000. 248.00 188 COND320000. 366.00 173 CONR112. 508.00 158 COND020000. 428.00 188 COND320000. 259.00 174 CONR2112. 201.00 159 COND020000. 468.00 191 COND330000. 259.00 174 CONR3111. 337.00 160 COND020000. 468.00 191 COND330000. 259.00 174 CONR3111. 337.00 160 COND020000. 468.00 191 COND030000. 509.00 174 CONR3121. 353.00 160 COND020000. 468.00 191 COND020000. 509.00 176 COND020100. 468.00 191 COND030000. 259.00 176 COND020100. 468.00 191 COND020000. 509.00 176 COND020100. 468.00 191 COND020000. 509.00 176 COND020000. 251.00 189 COND02000. 252.00 163 COND020000. 251.00 189 COND02000. 252.00 163 COND020000. 251.00 189 COND02000. 252.00 163 COND020000. 251.00 189 COND02000. 459.00 163 COND020000. 251.00 364 COND020000. 444.00 192 COND031000. 459.00 163 COND020000. 459.00 163 COND020000. 459.00 163 COND020000. 275.00 185 COND020000. 459.00 163 COND020000. 275.00 185 COND020000. 789.00 161 COND020000. 175.00 185 COND020000. 789.00 121 COND020000. 377.00 185 COND020000. 378.00 164 COND020000. 377.00 185 COND020000. 378.00 164 COND020000. 377.00 185 COND020000. 378.00 164 COND020000. 379.00 175.00 185 COND020000. 379.00 175.00 186 COND020000. 379.00 175.00 175.00 186 COND020000. 379.00 175.									
CONDOIO1010. 418,00 190 COND31000. 117,00 174 CONR011 263,00 159 CONDO102000. 248,00 389 COND32000. 156,00 176 CONDO102001. 222,00 188 CONDO20010. 222,00 188 CONDO20010. 222,00 188 CONDO20010. 222,00 188 CONDO20010. 258,00 191 CONDO20060. 468,00 191 CONDO30000. 252,00 176 CONR01112. 284,00 161 CONDO30000. 201,00 189 CONDO30000. 252,00 163 COND1155100000. 212,00 364 CONDO30000. 444,00 192 CONDO30000. 152,00 163 CONDO30000. 152,00 163 CONDO30000. 157,00 185 CONDO30000. 459,00 163 CONDO30000. 317,00 185 CONDO50000. 322,00 163 CONDO30000. 317,00 185 CONDO50000. 322,00 177 CONDO31010. 317,00 185 CONDO50000. 322,00 177 CONDO31010. 317,00 185 CONDO50000. 322,00 177 CONDO31010. 317,00 186 CONDO50000. 317,00 186 CONDO50000. 317,00 186 CONDO50000. 317,00 186 CONDO50000. 317,00 386 CONDO50000. 317,00 387 CONDO50000. 317,00 387 CONDO50000. 317,00 387 CONDO50000. 317,00 387 CONDO50000. 317 CONDO31010. 317,00 318 CONDO30000. 317 CONDO300000. 317 CONDO300000000000000000000000000000000					,				
CONDOIDRESS 52,00 389 CONO320000 166,00 176 CONR0112 269,00 158 CONO20000 244,00 188 CONO320000 346,00 173 CONR1112 506,00 158 CONO20010 222,00 188 CONO320000 259,00 174 CONR2112 201,00 159 CONO200000 468,00 191 CONO330000 259,00 174 CONR2111 337,00 160 CONO20060 468,00 191 CONO330010 257,00 174 CONR3111 335,00 160 CONO20060 468,00 191 CONO400000 62,00 176 CONR4111 248,00 161 CONO300000 201,00 189 CONO400000 52,00 176 CONR4111 248,00 161 CONO300000 201,00 189 CONO5100000 252,00 163 CONS15151 110,0 364 CONO300010 144,00 189 CONO510000 252,00 163 CONS1515100000 211,00 364 CONO300010 144,00 189 CONO510000 252,00 163 CONS1515100000 211,00 364 CONO51001 444,00 192 CONO51000 192,00 162 CONT01211210415 578,00 417 CONO50000 175,00 185 CONO50000 749,00 164 CONT0122110504 470,00 415 CONO50000 175,00 185 CONO50000 749,00 164 CONT0122110504 470,00 415 CONO51000 317,00 185 CONO581000 198,00 162 CONT012110503 506,00 416 CONO50000 317,00 185 CONO581000 198,00 162 CONT012110503 506,00 416 CONO50000 175,00 185 CONO581000 198,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO50000 198,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO50000 198,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO50000 189,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO560000 189,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO650000 189,00 162 CONT012110503 506,00 416 CONO50000 175,00 186 CONO650000 198,00 162 CONT012110503 500,00 424 CONO500000 175,00 186 CONO650000 198,00 162 CONT0121110503 500,00 424 CONO50000 175,00 187 CONO660000 175,00 180 CONT0121111001 197,00 182 CONO50000 175,00 187 CONO660000 175,00 180 CONT0121111001 197,00 142 CONO50000 175,00 187 CONO660000 175,00 180 CONT0121111001 197,00 142 CONO50000 175,00 187 CONO660000 175,00 180 CONT0121101 197,00 180 CONT0121101 197,00 180 CONT012101 197,00 180 CONT012101 197,00 180 CONT012101 197,00 180									
CONO20000 248,00 188 CONO321000 154,00 173 CONR2112 201.00 159 CONO20040 468,00 191 CONO330000 259,00 174 CONR3111 337,00 160 CONO20040 468,00 191 CONO330010 257,00 174 CONR3111 337,00 160 CONO20100 468,00 191 CONO430010 257,00 174 CONR3121 353,00 160 CONO20100 201,00 189 CONO410010 54,00 176 CONR4111 288,00 161 CONO300100 201,00 189 CONO410010 54,00 176 CONR4111 288,00 161 CONO30010 144,00 189 CONO410010 54,00 162 CONS1155100000 211,00 364 CONO30010 444,00 192 CONO510000 459,00 163 CONS11551000000 211,00 364 CONO30010 444,00 192 CONO51000 459,00 163 CONS11551000000 211,00 364 CONO30010 175,00 185 CONO512000 459,00 163 CONS112220420 367,00 418 CONO50000 175,00 185 CONO512000 459,00 163 CONT0121220420 367,00 415 CONO55000 175,00 185 CONO512000 459,00 163 CONT0121220420 367,00 415 CONO55000 175,00 185 CONO512000 192,00 162 CONT0121210130 578,00 417 CONO50000 175,00 185 CONO512000 459,00 163 CONT0121210130 574,00 415 CONO50000 175,00 185 CONO512000 198,00 162 CONT0121210130 574,00 415 CONO50000 175,00 185 CONO512000 198,00 162 CONT012110130 342,00 419 CONO50000 175,00 186 CONO581000 198,00 162 CONT012110130 274,00 419 CONO50000 175,00 186 CONO65000 441,00 120 CONT0121110130 274,00 426 CONO60000 175,00 186 CONO65000 441,00 120 CONT0121110130 274,00 426 CONO60000 175,00 187 CONO660000 441,00 120 CONT0121111010 97,00 423 CONO60000 150,00 187 CONO660000 181,00 180 CONT0121111010 97,00 423 CONO60000 150,00 187 CONO660000 181,00 180 CONT0121111010 97,00 423 CONO60000 150,00 187 CONO660000 181,00 180 CONT0121111010 97,00 423 CONO60000 150,00 187 CONO660000 181,00 180 CONT0121111010 97,00 423 CONO60000 150,00 187 CONO660000 181,00 180 CONT012111101 1164,00 421 CONO60000 150,00 187 CONO660000 181,00 180 CONT012111101 1164,00 421 CONO60000 150,00 187 CONO660000 181,00 180 CONT012111101 1164,00 421 CONO60000 150,00 187 CONO660000 181,00 180 CONT012101 1164,00 421 CONO60000 150,00 188 CONO660000 181,00 180 CONT012101 1164,00 421 CONO60000 150,00 188 CONO660000 181,00 181 CONT01220011000 152,00 499 CONO60000 177,00 193 CONO660									
CONO20010									
CONDOZCOMO  A68,00 191 CONO330000 259,00 174 CONR3121 337,00 160 CONOZCOMO  A68,00 191 CONO410000 62,00 176 CONR4111 248,00 161 CONOZCOMO  A01,00 189 CONO410010 52,00 176 CONR4111 248,00 161 CONO300100 144,00 189 CONO610000 252,00 163 CONST122 187,00 282 CONOSCOMO  A044,00 192 CONO511000 159,00 163 CONT1211210415 578,00 417 CONOAGONO  A044,00 192 CONO511000 179,00 163 CONT1211210415 578,00 417 CONOAGONO  A044,00 192 CONO511000 162 CONT1211210415 578,00 417 CONOSCOMO  A044,00 192 CONO512000 459,00 163 CONT1212120420 367,00 418 CONOSCOMO  A044,00 192 CONO512000 459,00 163 CONT1212120420 367,00 418 CONOSCOMO  A044,00 192 CONO512000 459,00 163 CONT1212120420 367,00 418 CONOSCOMO  A044,00 192 CONOS12000 459,00 163 CONT1212110450 578,00 418 CONOSCOMO  A045,00 185 CONOSE0000 789,00 121 CONT1212110300 544,00 416 CONOSCOMO  A045,00 185 CONOSE0000 789,00 162 CONT1212110300 342,00 419 CONOSCOMO  A045,00 185 CONOSE0000 491,00 120 CONT1212110310 274,00 426 CONOSCOMO  A045,00 186 CONOSCOMO  A045,00 187 CONOSCOMO  A05,00 187 C							CONR2112	201,00	159
CONDO20060	CONO020040	468,00	191				CONR3111	337,00	160
CONDOZO1000 468,00 191 CONO410000 52,00 176 CONR4111 248,00 161 CONO500000 201,00 189 CONO510000 54,00 176 CONR5112 187,00 282 CONO50000 144,00 189 CONO510000 .252,00 163 CONS11551000000 211,00 364 CONO50000 .444,00 192 CONO511000 .192,00 163 CONS11551000000 211,00 364 CONO50000 .444,00 192 CONO512000 .459,00 163 CONT01212200420 .367,00 418 CONO50000 .775,00 185 CONO513000 .499,00 163 CONT01212210480 .470,00 415 CONO50000 .775,00 185 CONO513000 .499,00 164 CONT0121210480 .470,00 415 CONO50000 .317,00 185 CONO513000 .198,00 162 CONT01212103305 .342,00 419 CONO51000 .317,00 185 CONO51000 .232,00 177 CONT05211210310 .274,00 426 CONO50000 .775,00 186 CONO50000 .491,00 120 CONT05211210330 .234,00 425 CONO50000 .755,00 186 CONO50000 .491,00 120 CONT05211210330 .234,00 425 CONO50100 .205,00 187 CONO60000 .755,00 180 CONT07211211801 .1164,00 421 CONO090100 .755,00 193 CONO60000 .755,00 180 CONT07211211801 .1164,00 421 CONO090100 .755,00 193 CONO60000 .755,00 180 CONT07211211801 .1164,00 421 CONO090100 .755,00 193 CONO60000 .755,00 180 CONT07210000 .759,00 347 CONO09000 .755,00 389 CONO60000 .755,00 389 CONO712000 .750,00 389 CONO	CONO020060	468,00	191				CONR3121	353,00	160
CONDOSCORODO 201,00 189 CONO-10100, 54,00 176 CONR5112 187,00 282 CONO-10101 144,00 189 CONO-101000, 252,00 163 CONT-15151000000 211,00 346 CONO-101000, 444,00 192 CONO-11000, 192,00 162 CONT-121210415, 578,00 417 CONO-1000-10100, 444,00 192 CONO-11000, 459,00 163 CONT-121210420, 367,00 418 CONO-101000, 175,00 185 CONO-13000, 497,00 164 CONT-121210480 470,00 415 CONO-1000-1010, 175,00 185 CONO-13000, 497,00 161 CONT-121210480 470,00 416 CONT-121210480 147,00 415 CONO-10100, 175,00 185 CONO-18000, 189,00 162 CONT-121130305, 342,00 419 CONO-1010, 175,00 185 CONO-18000, 232,00 177 CONT-121210330 283,00 426 CONO-10000, 175,00 186 CONO-18000, 441,00 120 CONT-1211210330 283,00 426 CONO-10000, 175,00 186 CONO-18000, 441,00 120 CONT-121120330 283,00 424 CONO-100000, 205,00 187 CONO-18000, 423,00 120 CONT-121120330 283,00 424 CONO-10000, 205,00 187 CONO-18000, 423,00 120 CONT-121120330 283,00 424 CONO-10000, 205,00 187 CONO-18000, 423,00 120 CONT-1211201330 283,00 424 CONO-18000, 205,00 187 CONO-18000, 205,00 18000, 2	CONO020100	468,00	191				CONR4111	248,00	161
CONDOSONO	CONO030000	201,00	189	CONO410010	54,00	176	CONR5112	187,00	282
CONO05000. 175,00 185 CONO512000. 459,00 163 CONT0121210480. 470,00 415 CONO50000. 175,00 185 CONO58000. 789,00 121 CONT01221210530 .506,00 416 CONO51000. 317,00 185 CONO581000. 198,00 162 CONT01221210530 .506,00 416 CONO51100. 317,00 185 CONO651000. 198,00 162 CONT01221210330 .342,00 426 CONO60000. 175,00 186 CONO650000. 491,00 120 CONT05211210310 .274,00 426 CONO60000. 175,00 186 CONO650000. 491,00 120 CONT05211210330 .283,00 425 CONO60000. 175,00 186 CONO650000. 491,00 120 CONT05211210330 .283,00 425 CONO60000. 205,00 187 CONO660000. 0n request 179 CONT05211210390 .341,00 423 CONO61010. 205,00 187 CONO661000. 0n request 179 CONT052112101. 997,00 420 CONO070000. 401,00 203 CONO67010. 81,00 180 CONT07211211210 .997,00 420 CONO09000. 125,00 193 CONO681000. 51,00 180 CONT07211211801 .1164,00 421 CONO09000. 125,00 193 CONO681000. 51,00 180 CONT0823001755 .769,00 429 CONO091450. 409,00 203 CONO69000. 124,00 178 CONT0823001755 .769,00 429 CONO091450. 449,00 204 CONO690100. 41,00 363 CONT0823001755 .769,00 429 CONO091450. 449,00 204 CONO690100. 41,00 363 CONT09200010838 .991,00 422 CONO093000. 51,00 180 CONT09200010838 .991,00 422 CONO093000. 91,00 177 CONO690100. 41,00 363 CONT09200010838 .991,00 429 CONO093000. 91,00 177 CONO690200. 16,00 335 CONT09200010000 152,00 409 CONO093000. 91,00 177 CONO690200. 16,00 363 CONT12200010000 152,00 409 CONO120888. 204,00 389 CONO690300. 155,00 385 CONT12200010000 152,00 409 CONO120888. 204,00 389 CONO690300. 155,00 363 CONT12200010000 152,00 409 CONO120888. 204,00 389 CONO690300. 155,00 363 CONT12200010000 152,00 409 CONO138209. 205,00 169 CONO74000. 155,00 363 CONT13200710277 209,00 371 CONO131040. 546,30 170 CONO690300. 155,00 363 CONT13200710277 209,00 371 CONO131040. 546,30 170 CONO690300. 155,00 363 CONT13200710277 209,00 372 CONO131000. 156,00 280 CONO13000. 177,00 389 CONO690300. 155,00 363 CONT1320071028 .889,00 373 CONO138209. 205,00 170 CONO690300. 155,00 363 CONT1320071028 .889,00 373 CONO138209. 205,00 170 CONO690300. 158,00 322 CONT1320071028 .889,00 373 CONO138209	CONO030010	144,00	189	CONO510000	252,00	163	CONS11551000000	211,00	364
CONDOSO000. 175,00 185 CONDS3000. 497,00 164 CONT01212110330 506,00 416 CONDOS1010. 175,00 185 CONDS80000. 789,00 162 CONT012121130305 342,00 419 CONDOS1010. 317,00 185 CONDOS0000. 198,00 162 CONT02121130305 342,00 419 CONDOS1010. 317,00 186 CONDOS0000. 232,00 177 CONT0521110310 274,00 426 CONDOS0000. 175,00 186 CONDOS0000. 491,00 120 CONT05211210330 283,00 425 CONDOS0000. 175,00 186 CONDOS0000. 491,00 120 CONT05211210330 283,00 425 CONDOS0000. 205,00 187 CONDOS0000. 424,00 179 CONT05211210390 341,00 423 CONDOS1000. 401,00 205,00 187 CONDOS0000. 41,00 310 CONDOS000. 41,00 310 CONDOS000. 41,00 420 CONDOS1000. 41,00 420 CONDOS1000. 41,00 420 CONDOS1000. 41,00 420 CONDOS1000. 420 CONDOS0000. 420 CONDOS0000. 420 CONDOS0000. 420 CONDOS0000. 425 CONDOS0000. 425 CONDOS0000. 425 CONDOS0000. 425 CONDOS0000. 425 CONDOS00000. 425 CONDOS000000. 425 CONDOS00000. 425 CONDOS000000. 425 CONDOS000000. 425 CONDOS000000. 425 CONDOS00000000000000000000000000000000000	CONO040000	444,00	192	CONO511000	192,00	162	CONT01211210415	578,00	417
CONDOSOIDO. 175,00 185 CONDSB000. 789,00 121 CONTO1221210330 506,00 415 CONDOSTOIDO. 317,00 185 CONDOSTOIDO. 198,00 162 CONTO1221210330 342,00 419 CONDOSTOIDO. 317,00 186 CONDOSTOIDO. 232,00 177 CONTO221210330 342,00 425 CONDOSCOIDO. 175,00 186 CONDOSCOIDO. 491,00 120 CONTO5211210330 283,00 425 CONDOSCOIDO. 175,00 186 CONDOSCOIDO. 491,00 120 CONTO5211210330 283,00 425 CONDOSCOIDO. 205,00 187 CONDOSCOIDO. 0187 CONDOSCOIDO. 0180 CONTO2112110390 341,00 423 CONDOSCOIDO. 0187 CONDOSCOIDO. 0187 CONDOSCOIDO. 0180 CONTO2112110390 341,00 423 CONDOSCOIDO. 0187 CONDOSCOIDO. 0180 CONTO211211801 1.164,00 421 CONDOSCOIDO. 0180 CONDOSCOIDO. 0180 CONTO211211801 1.164,00 421 CONDOSCOIDO. 0180 CONTO2121211801 1.164,00 421 CONDOSCOIDO. 0180 CONTO200010500 1.330,00 428 CONDOSCOIDO. 0180 CONTOSCOIDO. 0180 CONTOSCO	CONO040010	444,00	192	CONO512000	459,00	163	CONT01212200420	367,00	418
CONDOS10100. 317,00 185 CONOS81000. 198,00 152 CONTOS1211210305 342,00 419 CONODS1010. 317,00 185 CONOS61000. 232,00 127 CONTOS211210310 274,00 426 CONOG60000. 175,00 186 CONOS60000. 491,00 120 CONTOS211210330 283,00 425 CONOG60100. 205,00 187 CONOG60010. 423,00 120 CONTOS211210330 283,00 424 CONOG61000. 205,00 187 CONOG60000. on request 179 CONTOS211210390 341,00 423 CONOG61010. 205,00 187 CONOG60000. on request 179 CONTOS211211031 997,00 420 CONOG70000. 401,00 203 CONOG70010. 81,00 180 CONTOS211211801 .1164,00 .421 CONOG90000. 401,00 203 CONOG70010. 81,00 180 CONTOS211211801 .1164,00 .421 CONOG90000. 401,00 203 CONOG70010. 81,00 180 CONTOS211211801 .1164,00 .421 CONOG90000. 125,00 193 CONOG80000. 51,00 180 CONTOS20010500 1,330,00 428 CONOG90000. 60,00 203 CONOG90000. 51,00 180 CONTOS20010500 1,330,00 429 CONOG91000. 60,00 203 CONOG90000. 124,00 178 CONTOS20010000 1,330,00 347 CONOG91450. 449,00 204 CONOG90100. 41,00 363 CONTOS20010000 1,30,00 347 CONOG92000. 60,00 193 CONOG90100. 41,00 363 CONTOS20010000 1,30,00 347 CONOG92000. 60,00 193 CONOG90100. 41,00 363 CONTOS20010000 1,52,00 409 CONOG90000. 91,00 177 CONOG90100. 41,00 363 CONTOS20010000 1,52,00 409 CONOG90000. 17,00 193 CONOG90000. 16,00 355 CONTOS20010000 1,52,00 409 CONOG90000. 17,00 193 CONOG90200. 16,00 355 CONTIS200010000 1,52,00 409 CONO10388. 204,00 389 CONOG90200. 16,00 363 CONTIS20010000 1,52,00 409 CONO110888. 198,00 389 CONOG90200. 16,00 363 CONTIS20010000 1,52,00 409 CONO110888. 198,00 389 CONOG90300. 155,00 363 CONTIS20010000 1,50,00 409 CONO131040. 5,463,00 170 CONOG90300. 155,00 363 CONTIS20010000 1,50,00 409 CONO131040. 5,463,00 171 CONOG90300. 155,00 363 CONTIS20010000 1,50,00 409 CONO131040. 5,463,00 171 CONOG90300. 155,00 363 CONTIS20010000 1,50,00 409 CONO131040. 5,463,00 171 CONOG90300. 155,00 363 CONTIS20010000 1,50,00 371 CONO131040. 5,563,00 169 CONO720000. 5,8,00 427 CONTIS20010000 1,00 3,00 409 CONO131040. 1,563,00 169 CONO720000. 5,8,00 427 CONTIS20010000 1,00 3,00 409 CONO138299 205,00 170 CONO731000. 198,00 341 CONTIS200100	CONO050000	175,00	185	CONO513000	497,00	164	CONT01221210480	470,00	415
CONDO51010. 317,00 186 CONO610000. 232,00 177 CONT05211210310 .274,00 .426 CONO60000. 175,00 186 CONO650000. 491,00 120 CONT05211210330 .283,00 .425 CONO660010. 175,00 186 CONO651000. 423,00 120 CONT05211210330 .283,00 .425 CONO661010. 205,00 187 CONO660000. on request 179 CONT0521210390 .341,00 .423 CONO661010. 205,00 187 CONO661000. on request 179 CONT052121120390 .341,00 .423 CONO661010. 205,00 187 CONO661000. on request 179 CONT07211211201 .997,00 .420 CONO070000. 401,00 .203 CONO670010. 81,00 180 CONT07211211201 .997,00 .420 CONO090000. 125,00 193 CONO680000. 51,00 180 CONT08200010500 .1,330,00 .428 CONO090005. 203,00 .204 CONO680000. 51,00 180 CONT08200010500 .1,330,00 .428 CONO090450. 203,00 .204 CONO680000. 51,00 180 CONT08200010500 .1,330,00 .347 CONO091450. 449,00 .203 CONO690000. 124,00 178 CONT08200010500 .1,230,00 .347 CONO091450. 449,00 .204 CONO690100. 41,00 .363 CONT09200010000 .1,230,00 .347 CONO09200060,00 193 CONO690100. 41,00 .335 CONT09200010000 .890,00 .347 CONO09200088,00 .205 CONO690100. 41,00 .335 CONT09200010000 .890,00 .347 CONO093000. 91,00 .177 CONO690200. 16,00 .811 CONT12200010000 .152,00 .409 CONO093000. 91,00 .170 cONO690200. 16,00 .81 CONT12200010000 .152,00 .409 CONO093000. 91,00 .170 CONO690200. 16,00 .835 CONT12300010000 .152,00 .409 CONO130888. 204,00 .389 CONO690200. 16,00 .335 CONT12300010000 .152,00 .409 CONO130405. 941,00 .171 CONO690300. 155,00 .335 CONT12300010000 .152,00 .409 CONO130405. 941,00 .171 CONO690300. 155,00 .335 CONT12300010000 .152,00 .409 CONO130405. 941,00 .172 CONO690300155,00 .335 CONT13200010000 .152,00 .371 CONO131040. 5.463,00 .172 CONO690300155,00 .335 CONT13200010000 .152,00 .372 CONO131000156,00 .369 CONO13000170 CONO690300155,00 .335 CONT13200010000 .152,00 .372 CONO1318007346,00 .172 CONO690300155,00 .422 CONT13200010000 .152,00 .372 CONO131800736,00 .172 CONO690300155,00 .422 CONT13200010000 .150,00 .372 CONO1318299 .205,00 .169 CONO71045058,00 .422 CONT13200010000 .130,00 .409 CONO138299 .205,00 .172 CONO6	CONO050010	175,00	185	CONO580000	789,00	121	CONT01221210530	506,00	416
CONDO60000	CONO051000	317,00	185	CONO581000	198,00	162	CONT02121130305	342,00	419
CONDO60100. 175,00 186 CONDO651000. 423,00 120 CONTO5211210450 530,00 424 CONDO61010. 205,00 187 CONDO660000. on request 179 CONTO5221210390 341,00 423 CONDO61010. 205,00 187 CONDO661000. on request 179 CONTO5221210390 341,00 420 CONDO70000. 401,00 203 CONDO70010. 81,00 180 CONTO7211211801 1.164,00 421 CONDO90000. 125,00 193 CONDO60000. 51,00 180 CONTO7211211801 1.164,00 421 CONDO90000. 125,00 193 CONDO60000. 51,00 180 CONTO7211211801 1.164,00 421 CONDO90000. 60,00 203 CONDO60000. 51,00 180 CONTO820010500 1.330,00 428 CONDO91000. 60,00 203 CONDO69000. 124,00 178 CONTO9200010000 1.230,00 347 CONDO91450. 449,00 204 CONDO69100. 41,00 363 CONTO9200010383 991,00 422 CONDO92000. 60,00 193 CONDO690100. 41,00 363 CONTO9300010000 890,00 347 CONDO92000. 88,00 205 CONDO91000. 41,100 181 CONT1220010000 152,00 409 CONDO93000. 91,00 177 CONDO92000. 16,00 181 CONT1220010000 152,00 409 CONDO93000. 91,00 177 CONDO92000. 16,00 335 CONT09300010000 152,00 409 CONDO93000. 71,00 193 CONDO690200. 16,00 335 CONT1200010000 152,00 409 CONDO120888. 198,00 389 CONDO690200. 16,00 335 CONT1200010000 152,00 409 COND120888. 198,00 389 CONDO690300. 155,00 363 CONT1200010000 152,00 409 COND120888. 204,00 389 CONDO690300. 155,00 181 CONT13200710277 209,00 371 COND131045. 9,410,00 171 CONDO690300. 155,00 363 CONT13200710277 209,00 371 COND131045. 9,410,00 171 CONDO690300. 155,00 363 CONT13200710278 465,00 372 COND131080. 7,346,00 172 CONDO690300. 155,00 363 CONT13200710288 817,00 372 COND131080. 7,346,00 172 CONDO690300. 55,00 178 CONT13200710287 767,00 372 COND131080. 7,346,00 172 CONDO690300. 55,00 178 CONT13200710288 817,00 373 COND13080. 7,346,00 172 COND0690300. 55,00 178 CONT13200710288 817,00 373 COND13080. 7,346,00 172 COND0690300. 55,00 178 CONT13200710288 817,00 373 COND13080. 7,346,00 172 COND0690300. 55,00 178 CONT13200710288 817,00 373 COND13080. 7,346,00 172 COND0690300. 55,00 178 CONT13200710288 817,00 373 COND13080. 7,346,00 172 COND0690300. 55,00 178 CONT13200710288 817,00 373 COND0690300. 155,00 383 CONT13200710288 817,00 373 CO	CONO051010	317,00	185	CONO610000	232,00	177	CONT05211210310	274,00	426
COND061000         205,00         187         COND660000         on request         179         CONT0721121120390         341,00         423           CON0070000         A01,00         203         COND670010         81,00         180         CONT07211211801         1.997,00         420           CON0090000         125,00         193         COND680000         51,00         180         CONT08210010500         1330,00         428           CON0991000         60,00         203         COND681000         51,00         180         CONT08200010500         1330,00         429           CON0991000         60,00         203         COND699000         124,00         178         CONT08200010500         1330,00         429           CON0991000         60,00         203         COND699100         41,00         363         CONT09200010383         991,00         347           CON0992000         88,00         205         CON0690100         41,00         181         CONT12200010000         152,00         409           CON093000         91,00         177         CON0690200         16,00         181         CON12300010000         152,00         409           CON0110888         198,00         389         CON06903	CONO060000	175,00	186				CONT05211210330	283,00	425
COND061010         205,00         187         COND661000         on request         179         CONT07211211201         997,00         420           CON0070000         401,00         203         CONO670010         .81,00         180         CONT07211211801         1164,00         .421           CON090000         125,00         193         CONO680000         .51,00         180         CONT08200010500         .769,00         .428           CON091000         .60,00         .203         CONO690000         .124,00         .178         CONT09200010030         .234           CON091450         .449,00         .204         CONO690100         .41,00         .363         CONT09200010383         .991,00         .422           CON092000         .60,00         .193         CONC690100         .41,00         .335         CONT09200010383         .991,00         .422           CON092000         .88,00         .205         CON690100         .41,00         .335         CONT09200010383         .991,00         .409           CON093000         .91,00         .177         CON690200         .16,00         .811         CONT12200010000         .58,00         .409           CON0120888         .98,00         .389         CON690200									
CONO070000.         401,00         203         CONO670010         .81,00         .80         CONT07211211801         .164,00         .421           CON0090000.         .125,00         .193         CONO680000         .51,00         .180         CONT08200010500         .330,00         .428           CON0091000.         .60,00         .203         CONO691000         .124,00         .178         CONT09200010000         .123,000         .347           CON091450.         .449,00         .204         CONO691000         .41,00         .363         CONT09200010000         .890,00         .347           CON092200.         .60,00         .93         CONO690100         .41,00         .335         CONT0930010000         .890,00         .347           CON093000.         .91,00         .177         CONO690100         .41,00         .181         CONT12200010000         .58,00         .409           CON092000.         .88,00         .205         CONO6690200         .16,00         .335         CONT12300010000         .152,00         .409           CON0120888.         .198,00         .389         CONO690200         .16,00         .363         CONT12300010010         .56,00         .409           CON0131040.         .5463,00									
CONO090000.         125,00         193         CONO680000         .51,00         180         CONT08200010500         .1330,00         .428           CON0090450.         .203,00         204         CON0681000         .51,00         180         CONT08230010750         .769,00         .429           CON0091000.         .60,00         203         CON0699000         .124,00         .78         CONT09200010383         .991,00         .422           CON0092000.         .60,00         193         CON0690100         .41,00         .363         CONT09200010383         .991,00         .422           CON0092000.         .60,00         193         CON0690100         .41,00         .363         CONT09300100000         .520,00         .409           CON0093000.         .91,00         .177         CON0690200         .16,00         .81         CONT12200010020         .58,00         .409           CON010888.         .198,00         .389         CON0690200         .16,00         .353         CONT12300010000         .152,00         .409           CON0120888.         .204,00         .389         CON0690300         .155,00         .81         CONT13200710277         .209,00         .371           CON0131045.         .9410,00									
COND09450.         .203,00         .204         CONG681000         .51,00         .180         CONT08230010750         .769,00         .429           CON0091000.         .60,00         .203         CONG690100         .24,00         .178         CONT09200010383         .991,00         .422           CON0092000.         .60,00         .193         CONG690100         .41,00         .355         CONT0930010000         .890,00         .347           CON0092000.         .88,00         .205         CONG690100         .41,00         .181         CONT12200010020         .58,00         .409           CON093000.         .91,00         .177         CONG690200         .16,00         .181         CONT12200010020         .58,00         .409           CON0110888.         .198,00         .389         CONG690200         .16,00         .355         CONT12300010000         .152,00         .409           CON0120888.         .204,00         .389         CONG690300         .155,00         .363         CONT13200010010         .56,00         .409           CON0131040.         .5463,00         .170         CONG690300         .155,00         .335         CONT13200710277         .209,00         .371           CON01381050.         .7346,00									
CONO091000.         60,00         203         CONO690000         124,00         178         CONT09200010000         1.230,00         347           CON0091450.         449,00         204         CON0690100         41,00         363         CONT09200010383         991,00         422           CON0092000.         60,00         193         CON0690100         41,00         335         CONT09300010000         890,00         347           CON0093000.         91,00         177         CON0690200         16,00         81         CONT12200010000         152,00         409           CON094000.         17,00         193         CON0690200         16,00         335         CONT12300010000         152,00         409           CON0110888.         198,00         389         CON0690200         16,00         363         CONT12300010010         56,00         409           CON0120888.         204,00         389         CON0690300         155,00         181         CONT13200710278         465,00         371           CON0131045.         9,410,00         171         CON0690300         155,00         363         CONT13200710278         465,00         372           CON0131080.         7,346,00         172         CON									
CONO091450. 449,00 204 CONO690100. 41,00 363 CONT09200010383 991,00 422 CONO092000. 60,00 193 CONO690100. 41,00 335 CONT09300010000 890,00 347 CONO092200. 88,00 205 CONO690100. 41,00 181 CONT12200010000 152,00 409 CONO093000. 91,00 177 CONO690200. 16,00 181 CONT12200010000 152,00 409 CONO094000. 17,00 193 CONO690200. 16,00 335 CONT12300010000 152,00 409 CONO110888. 198,00 389 CONO690200. 16,00 335 CONT12300010000 152,00 409 CONO110888. 204,00 389 CONO690200. 16,00 363 CONT12300010010 56,00 409 CONO120888. 204,00 389 CONO690300. 155,00 335 CONT12300010010 56,00 409 CONO13045. 9,410,00 170 CONO690300. 155,00 335 CONT13200710278 465,00 371 CONO131040. 5,463,00 170 CONO690300. 155,00 335 CONT13200710278 465,00 371 CONO131080. 7,346,00 172 CONO691000. 55,00 178 CONT13200710285 817,00 372 CONO138100. 1,563,00 168 CONO710330. 46,00 427 CONT13200710285 817,00 372 CONO138100. 1,563,00 168 CONO710330. 46,00 427 CONT13200710289 989,00 373 CONO138200. 1,950,00 169 CONO72000. 58,00 427 CONT13200710289 989,00 375 CONO138299. 205,00 169 CONO72000. 58,00 422 CONT1320071055 746,00 376 CONO138299. 205,00 170 CONO731200. 208,00 422 CONT1320071055 385,00 377 CONO138299. 205,00 170 CONO731200. 208,00 422 CONT1320071055 385,00 377 CONO138299. 205,00 177 CONO731800. 255,00 422 CONT1320071055 385,00 377 CONO138299. 205,00 177 CONO731800. 255,00 422 CONT1320071055 56,00 385 CONO140918. 4,562,00 28 CONO740000. 198,00 422 CONT1320071055 385,00 377 CONO14918. 4,562,00 28 CONO740000. 198,00 398 CONT13308010000 103,00 409 CONO144918. 4,562,00 28 CONO740000. 198,00 398 CONT13308010000 103,00 409 CONO14091. 177,00 29 CONO820170. 179,00 304 CONT1300071355 616,00 385 CONO210000. 177,00 331 CONO820170. 179,00 304 CONT1300071355 616,00 385 CONO210000. 177,00 331 CONO820170. 179,00 304 CONT1300071355 616,00 385 CONO210000. 177,00 331 CONO820170. 179,00 304 CONT1300071355 616,00 385 CONO210012. 177,00 331 CONO820170. 179,00 345 CONT1300071355 1,073,00 382 CONO210012. 177,00 29 CONO87001. 43,00 345 CONT13000713350 1,204,00 382 CONO210012. 177,00 29									
CONO092000         66,00         193         CONO690100         41,00         335         CONT0930010000         890,00         347           CONO092000         88,00         205         CONO690100         41,00         181         CONT12200010000         152,00         409           CONO094000         17,00         193         CONO690200         16,00         335         CONT12300010000         152,00         409           CONO110888         198,00         389         CONO690200         16,00         363         CONT12300010000         152,00         409           CONO130888         198,00         389         CONO690300         155,00         181         CONT13200710277         209,00         371           CONO131040         5.463,00         170         CONO690300         155,00         335         CONT13200710278         465,00         371           CONO131045         9.410,00         171         CONO690300         155,00         363         CONT13200710285         817,00         372           CONO131800         7.346,00         172         CONO690300         155,00         363         CONT13200710285         881,00         372           CONO138200         1.563,00         168         CONO71									
CONO092200 88,00 205 CONO690100 41,00 181 CONT12200010000 152,00 409 CONO093000 91,00 177 CONO690200 16,00 335 CONT12200010020 58,00 409 CONO94000 17,00 193 CONO690200 16,00 335 CONT12300010000 152,00 409 CONO110888 198,00 389 CONO690200 16,00 363 CONT12300010010 56,00 409 CONO120888 204,00 389 CONO690300 155,00 181 CONT12300710277 209,00 371 CONO131040 5,463,00 170 CONO690300 155,00 363 CONT13200710277 209,00 371 CONO131045 9,410,00 171 CONO690300 155,00 363 CONT13200710278 465,00 371 CONO131045 9,410,00 171 CONO690300 155,00 363 CONT13200710278 465,00 372 CONO131080 7,346,00 172 CONO691000 55,00 178 CONT13200710285 817,00 372 CONO138200 1,563,00 168 CONO710330 46,00 427 CONT13200710289 989,00 373 CONO138200 1,550,00 169 CONO710450 58,00 427 CONT13200710285 746,00 376 CONO138299 205,00 169 CONO710000 58,00 422 CONT13200710655 385,00 377 CONO138299 205,00 170 CONO731200 208,00 422 CONT13200710655 385,00 377 CONO138299 205,00 170 CONO731200 208,00 422 CONT13200710655 385,00 377 CONO138299 205,00 170 CONO731200 208,00 422 CONT13200610000 103,00 409 CONO141000 2.528,00 27 CONO740000 198,00 413 CONT13306010000 81,00 409 CONO141000 2.528,00 27 CONO740000 198,00 413 CONT13306010000 81,00 409 CONO151000 81,70 26 CONO741000 110,00 413 CONT1330010000 81,00 409 CONO151000 177,00 28 CONO741000 110,00 413 CONT1350071355 616,00 385 CONO210000 177,00 29 CONO820170 179,00 282 CONT13500713350 1.073,00 382 CONO210000 177,00 331 CON0820170 179,00 282 CONT1350071355 616,00 385 CONO210000 177,00 331 CON0820170 179,00 282 CONT13600713355 1.073,00 382 CONO210012 177,00 29 CON0820170 179,00 304 CONT13600713355 1.073,00 382 CONO210012 177,00 29 CON0870010 77,00 345 CONT1390071360 1.204,00 382 CONO210012 177,00 29 CON0870010 77,00 345 CONT13900713360 1.204,00 382 CONO210012 177,00 29 CON0870010 77,00 345 CONT13900713360 1.204,00 382 CONO211012 275,00 175 CON0870010 77,00 345 CONT13900713360 1.204,00 382 CONO211012 275,00 331 CON0870100 77,00 345 CONT13900713360 1.204,00 382 CONO211012 275,00 331 CON0871200 77,00 345 CONT13900713360 1.2									
CONO093000									
CONO094000. 17,00 193 CONO690200. 16,00 335 CONT12300010000 152,00 409 CONO110888. 198,00 389 CONO690200. 16,00 363 CONT12300010010 56,00 409 CONO120888. 204,00 389 CONO690300. 155,00 181 CONT13200710277 209,00 371 CONO131040. 5.463,00 170 CONO690300. 155,00 335 CONT13200710278 465,00 371 CONO131045. 9.410,00 171 CONO690300. 155,00 363 CONT13200710285 817,00 372 CONO131080. 7.346,00 172 CONO691000. 55,00 178 CONT13200710287 767,00 372 CONO131080. 7.346,00 172 CONO691000. 55,00 178 CONT13200710287 767,00 372 CONO138100. 1.563,00 168 CONO710330. 46,00 427 CONT13200710289 989,00 373 CONO138209. 1.950,00 169 CONO710450. 58,00 427 CONT13200710289 989,00 373 CONO138299. 205,00 169 CONO720000. 58,00 422 CONT13200710655 746,00 376 CONO138299. 205,00 172 CONO731200. 208,00 422 CONT13206010000 103,00 409 CONO138299. 205,00 172 CONO731200. 208,00 422 CONT13206010000 103,00 409 CONO144000. 2.528,00 27 CONO740000. 198,00 413 CONT1330610000 103,00 409 CONO144918. 4.562,00 28 CONO740000. 198,00 398 CONT13308010000 81,00 409 CONO151000. 8.172,00 26 CONO740000. 198,00 398 CONT13308010000 81,00 409 CONO151000. 177,00 29 CONO820170. 179,00 282 CONT13500713250 616,00 385 CONO210000. 177,00 331 CONO820170. 179,00 282 CONT13500713350 1.073,00 382 CONO210000. 177,00 331 CONO820170. 179,00 304 CONT13600713355 1.073,00 382 CONO210012. 177,00 331 CONO820170. 179,00 342 CONT13600713355 1.073,00 382 CONO210012. 177,00 331 CONO820220. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO820220. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO820220. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO870010. 18,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO870010. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO870010. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO870010. 198,00 345 CONT13600713355 1.073,00 382 CONO210012. 177,00 175 CONO870010. 77,00 344 CONT13600713355 1.074,00 382 CONO210012. 275,00 175 CONO870010. 77,00 345 CONT1390									
CONO110888									
CONO120888 204,00 389 CONO690300 155,00 181 CONT13200710277 209,00 371 CONO131040 5.463,00 170 CONO690300 155,00 335 CONT13200710278 465,00 371 CONO131045 9.410,00 171 CONO690300 155,00 363 CONT13200710285 465,00 371 CONO131080 7.346,00 172 CONO691000 55,00 178 CONT13200710287 767,00 372 CONO138100 1.563,00 168 CONO710330 46,00 427 CONT13200710289 989,00 373 CONO138200 1.950,00 169 CONO710450 58,00 427 CONT1320071089 989,00 376 CONO138299 205,00 169 CONO720000 58,00 422 CONT13200710655 746,00 376 CONO138299 205,00 170 CONO731200 208,00 422 CONT13200710656 385,00 377 CONO138299 205,00 172 CONO731800 255,00 422 CONT13206010000 103,00 409 CONO141000 2.528,00 27 CONO740000 198,00 413 CONT13306010000 103,00 409 CONO144918 4.562,00 28 CONO740000 198,00 413 CONT13306010000 81,00 409 CONO151000 8.172,00 26 CONO741000 110,00 413 CONT13300713250 616,00 385 CONO210000 177,00 29 CONO820170 179,00 382 CONC210000 177,00 331 CONO820170 179,00 382 CONC210000 177,00 331 CONO820170 179,00 382 CONC210012 177,00 331 CONO820220 198,00 345 CONT13600713355 1073,00 382 CONC210012 177,00 331 CONO820220 198,00 345 CONT13600713355 1073,00 382 CONC210012 177,00 29 CONO870010 43,00 345 CONT13600713355 1073,00 382 CONC210012 177,00 29 CONO870010 43,00 345 CONT13600713355 1073,00 382 CONC210012 177,00 29 CONO870010 43,00 345 CONT13600713355 401,00 382 CONC210012 177,00 29 CONO870010 43,00 345 CONT13600713355 401,00 382 CONC211012 275,00 29 CONO870010 77,00 345 CONT13900713380 532,00 382 CONC211012 275,00 39 CONC870010 77,00 345 CONT13900713380 532,0									
CONO131040. 5.463,00 170 CONO690300. 155,00 335 CONT13200710278 .465,00 371 CONO131045 9.410,00 171 CONO690300. 155,00 363 CONT13200710285 .817,00 372 CONO131080. 7.346,00 172 CONO691000. 55,00 178 CONT13200710287 .767,00 372 CONO138100. 1.563,00 168 CONO710330. 46,00 427 CONT13200710289 .989,00 373 CONO138200. 1.950,00 169 CONO710450. 58,00 427 CONT13200710655 .746,00 376 CONO138299 .205,00 169 CONO720000. 58,00 422 CONT13200710656 .385,00 377 CONO138299 .205,00 170 CONO731200 .208,00 422 CONT13200710656 .385,00 409 CONO138299 .205,00 172 CONO731200 .208,00 422 CONT13206010000 .103,00 409 CONO141000. 2.528,00 .27 CONO740000. 198,00 413 CONT13208010000 .81,00 409 CONO144918 .4.562,00 .28 CONO740000. 198,00 .398 CONT13308010000 .81,00 409 CONO151000. 8.172,00 .26 CONO741000. 110,00 413 CONT13308010000 .81,00 409 CONO151000. 8.172,00 .26 CONO741000. 110,00 413 CONT13500713250 .616,00 385 CONO210000. 177,00 .75 CONO820170 .779,00 .382 CONO210000. 177,00 .391 CONO820170 .779,00 .382 CONO210000. 177,00 .331 CONO820170 .779,00 .304 CONT13500713350 .1.073,00 .382 CONO210012 .777,00 .331 CONO820170 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .375 CONO820170 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .375 CONO820170 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .375 CONO820100 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .375 CONO820170 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .375 CONO820170 .779,00 .304 CONT13600713355 .1.073,00 .382 CONO210012 .777,00 .29 CONO870010 .43,00 .345 CONT13600713375 .401,00 .382 CONO210012 .777,00 .29 CONO870010 .779,00 .344 CONT13600713360 .748,00 .385 CONO210012 .777,00 .29 CONO870010 .779,00 .344 CONT13900713360 .1.204,00 .382 CONO211012 .275,00 .29 CONO870010 .779,00 .344 CONT13900713360 .1.204,00 .382 CONO211012 .275,00 .29 CONO870010 .779,00 .344 CONT13900713360 .1.204,00 .382 CONO211012 .275,00 .331 CONO871200 .879,00 .345 CONT14200010000 .40,00 .410									
CONO131045					,				
CONO131080									
CONO138100									
CONO138200. 1.950,00 169 CONO71045058,00 427 CONT13200710655 746,00 .376 CONO138299. 205,00 169 CONO72000058,00 422 CONT13200710656 .385,00 .377 CONO138299. 205,00 .170 CONO731200208,00 422 CONT13206010000 .103,00 .409 CONO138299. 205,00 .172 CONO731800255,00 422 CONT13208010000 .103,00 .409 CONO141000. 2.528,00 .27 CONO740000198,00 .413 CONT13306010000 .81,00 .409 CONO144918. 4.562,00 .28 CONO740000198,00 .398 CONT13308010000 .81,00 .409 CONO1510008.172,00 .26 CONO741000110,00 .413 CONT13500713250 .616,00 .385 CONO210000177,00 .175 CONO81000018,00 .333 CONT13500713350 .1.073,00 .382 CONO210000177,00 .29 CONO820170179,00 .282 CONT13500713350 .1.073,00 .382 CONO210012177,00 .331 CONO820170179,00 .304 CONT13600713355 .1.073,00 .382 CONO210012177,00 .331 CONO820220198,00 .345 CONT13600713375 .401,00 .382 CONO210012177,00 .29 CONO820200198,00 .345 CONT13600713375 .401,00 .382 CONO210012177,00 .29 CONO820200198,00 .345 CONT13600713375 .401,00 .382 CONO210012177,00 .29 CONO87000143,00 .345 CONT13900713360 .1.204,00 .382 CONO211012275,00 .29 CONO87000077,00 .344 CONT13900713380 .532,00 .382 CONO211012275,00 .275 CONO87100077,00 .344 CONT13900713380 .532,00 .382 CONO211012275,00 .331 CONO87120087,00 .345 CONT14200010000 .40,00 .410									
CONO138299         205,00         169         CONO720000         58,00         .422         CONT13200710656         .385,00         .377           CONO138299         205,00         170         CONO731200         208,00         .422         CONT13206010000         .103,00         .409           CONO138299         205,00         172         CONO731800         .255,00         .422         CONT13208010000         .103,00         .409           CONO144000         2.528,00         .27         CONO740000         .198,00         .413         CONT13306010000         .81,00         .409           CONO151000         8.172,00         .26         CONO7440000         .198,00         .398         CONT13308010000         .81,00         .409           CONO210000         8.172,00         .26         CONO741000         .110,00         .413         CONT13500713250         .616,00         .385           CONO210000         .177,00         .175         CONO810000         .18,00         .333         CONT13500713350         .1.073,00         .382           CONO210010         .177,00         .29         CONO820170         .179,00         .282         CONT13600713375         .616,00         .385           CONO210012         .177,00				CONO710330	40,00	427			
CONO138299         205,00         170         CONO731200         208,00         422         CONT13206010000         103,00         409           CONO138299         205,00         172         CONO731800         255,00         422         CONT13208010000         103,00         409           CONO141000         2.528,00         27         CONO740000         198,00         413         CONT13306010000         81,00         409           CON0151000         8.172,00         26         CONO741000         110,00         413         CONT13500713250         616,00         385           CON0210000         177,00         175         CON081000         18,00         333         CONT13500713350         1.073,00         382           CON0210000         177,00         29         CON0820170         179,00         282         CONT13500713370         401,00         382           CON0210012         177,00         331         CON0820170         179,00         304         CONT13600713355         616,00         385           CON0210012         177,00         331         CON0820220         198,00         282         CONT13600713355         1.073,00         382           CON0210012         177,00         37         CON08									
CONO138299.         .205,00         .172         CONO731800.         .255,00         .422         CONT13208010000         .103,00         .409           CONO141000.         2.528,00         .27         CONO740000.         .198,00         .413         CONT13306010000         .81,00         .409           CONO144918.         .4.562,00         .28         CONO740000.         .198,00         .398         CONT13308010000         .81,00         .409           CONO210000.         .8.172,00         .26         CONO741000         .110,00         .413         CONT13500713250         .616,00         .385           CON0210000.         .177,00         .175         CON0810000         .18,00         .333         CONT13500713350         .1.073,00         .382           CON0210000.         .177,00         .29         CON0820170         .179,00         .282         CONT13500713370         .401,00         .385           CON0210012.         .177,00         .331         CON0820220         .198,00         .282         CONT13600713355         .616,00         .385           CON0210012.         .177,00         .331         CON0820220         .198,00         .282         CONT13600713355         .1073,00         .382           CON0210012.									
CONO141000.         2.528,00         27         CONO740000         198,00         413         CONT13306010000         81,00         409           CONO144918.         4.562,00         28         CONO740000         198,00         398         CONT13308010000         81,00         409           CON0151000.         8.172,00         26         CONO741000         110,00         413         CONT13500713250         .616,00         385           CON0210000.         177,00         175         CON0810000         18,00         333         CONT13500713350         1.073,00         382           CON0210000.         177,00         29         CON0820170         179,00         282         CONT13500713370         401,00         382           CON0210012.         177,00         331         CON0820170         179,00         304         CONT13600713255         .616,00         385           CON0210012.         177,00         331         CON0820220         198,00         282         CONT13600713355         1.073,00         382           CON0210012.         177,00         175         CON0820220         198,00         304         CONT13600713375         401,00         382           CON0210012.         177,00         29									
CONO144918.         4.562,00         28         CONO740000         198,00         398         CONT13308010000         81,00         409           CONO151000.         8.172,00         26         CONO741000         110,00         413         CONT13500713250         .616,00         385           CONO210000.         177,00         175         CONO810000         18,00         333         CONT13500713350         1.073,00         382           CONO210000.         177,00         29         CONO820170         179,00         282         CONT13500713370         .401,00         382           CONO210012.         177,00         331         CONO820170         179,00         304         CONT13600713255         .616,00         385           CONO210012.         177,00         331         CONO820220         198,00         282         CONT13600713355         1.073,00         382           CONO210012.         177,00         375         CONO820220         198,00         282         CONT13600713355         401,00         382           CONO210012.         177,00         29         CONO870001         43,00         345         CONT13900713260         748,00         385           CONO211012.         275,00         29									
CONO151000.         8.172,00         26         CONO741000.         110,00         413         CONT13500713250         .616,00         385           CONO210000.         177,00         175         CONO810000         18,00         333         CONT13500713350         1.073,00         382           CONO210000.         177,00         29         CONO820170         179,00         282         CONT13500713370         .401,00         382           CONO210000.         177,00         331         CONO820170         179,00         304         CONT13600713255         .616,00         385           CONO210012.         177,00         331         CONO820220         198,00         282         CONT13600713355         .1073,00         382           CONO210012.         177,00         375         CONO820220         198,00         304         CONT13600713355         .401,00         382           CONO210012.         177,00         29         CONO870001         .43,00         345         CONT13900713260         .748,00         385           CON0211012.         275,00         29         CONO871000         .77,00         344         CONT13900713360         1.204,00         382           CON0211012.         275,00         331									
CONO210000.         177,00         175         CONO810000.         18,00         333         CONT13500713350         1.073,00         382           CONO210000.         177,00         29         CONO820170.         179,00         282         CONT13500713370         401,00         382           CONO210000.         177,00         331         CONO820170.         179,00         304         CONT13600713255         616,00         385           CONO210012.         177,00         331         CONO820220.         198,00         282         CONT13600713355         1.073,00         382           CONO210012.         177,00         175         CONO820220.         198,00         304         CONT13600713355         401,00         382           CONO210012.         177,00         29         CONO870001         43,00         345         CONT13900713260         748,00         385           CONO211012.         275,00         29         CONO870010         77,00         345         CONT13900713360         1.204,00         382           CONO211012.         275,00         175         CONO871000         77,00         344         CONT13900713380         532,00         382           CONO211012.         275,00         331									
CONO210000.         177,00         29         CONO820170.         179,00         282         CONT13500713370         401,00         382           CONO210000.         177,00         331         CONO820170.         179,00         304         CONT13600713255         .616,00         385           CONO210012.         177,00         331         CONO820220.         198,00         282         CONT13600713355         1.073,00         382           CONO210012.         177,00         175         CONO820220.         198,00         304         CONT13600713375         .401,00         382           CONO210012.         177,00         29         CONO870001         .43,00         345         CONT13900713260         .748,00         385           CONO211012.         275,00         29         CONO870010         .77,00         345         CONT13900713360         1.204,00         382           CONO211012.         275,00         175         CONO871000         .77,00         344         CONT13900713380         .532,00         382           CONO211012.         275,00         331         CONO871200         .87,00         345         CONT14200010000         .40,00         .410					,				
CONO210000.         177,00         331         CONO820170         179,00         304         CONT13600713255         .616,00         385           CONO210012.         177,00         331         CONO820220         198,00         282         CONT13600713355         1.073,00         382           CONO210012.         177,00         175         CONO820220         198,00         304         CONT13600713375         .401,00         382           CONO210012.         177,00         29         CONO870001         .43,00         345         CONT13900713260         .748,00         385           CONO211012.         275,00         29         CONO870010         .77,00         345         CONT13900713360         1.204,00         382           CONO211012.         275,00         175         CONO871000         .77,00         344         CONT13900713380         .532,00         382           CONO211012.         275,00         331         CONO871200         .87,00         345         CONT14200010000         .40,00         .410									
CONO210012       177,00       331       CONO820220       198,00       282       CONT13600713355       1.073,00       382         CONO210012       177,00       175       CONO820220       198,00       304       CONT13600713375       .401,00       382         CONO210012       177,00       29       CONO870001       .43,00       345       CONT13900713260       .748,00       385         CONO211012       275,00       29       CONO870010       .77,00       345       CONT13900713360       1.204,00       382         CONO211012       275,00       175       CONO871000       .77,00       344       CONT13900713380       .532,00       382         CONO211012       275,00       331       CONO871200       .87,00       345       CONT14200010000       .40,00       .410									
CONO210012       177,00       175       CONO820220       198,00       304       CONT13600713375       .401,00       382         CONO210012       177,00       29       CONO870001       .43,00       345       CONT13900713260       .748,00       385         CONO211012       275,00       29       CONO870010       .77,00       345       CONT13900713360       1.204,00       382         CONO211012       275,00       175       CONO871000       .77,00       344       CONT13900713380       .532,00       382         CONO211012       275,00       331       CONO871200       .87,00       345       CONT14200010000       .40,00       .410									
CONO210012       177,00       29       CONO870001       .43,00       .345       CONT13900713260       .748,00       .385         CONO211012       .275,00       .29       CONO870010       .77,00       .345       CONT13900713360       .1.204,00       .382         CONO211012       .275,00       .175       CONO871000       .77,00       .344       CONT13900713380       .532,00       .382         CONO211012       .275,00       .331       CONO871200       .87,00       .345       CONT14200010000       .40,00       .410								,	
CONO211012									
CONO211012									
CONO211012275,00331 CONO87120087,00345 CONT1420001000040,00410									
					,				

Article number	Prices in EUR	Page	Article number	Prices in EUR	Page	Article number	Prices in EUR	Page
CONT14300010000	042,00	410	CONT1840000064	0 88,00	401			
CONT14300010100	045,00	410	CONT18500000640			CONW6003500		
CONT16200010000	0229,00	400	CONT18570013300	0875,00	383	CONW6003501		
CONT16200030000	0435,00	400	CONT18570013320	0875,00	383	CONW6003502		
CONT16200040130	0,008	399	CONT1867001330	5875,00	383	CONW2111110500		
CONT1620004046	11.007,00	398	CONT1867001332	5875,00	383	CONW2111110700		
CONT16200050000	D185,00	400	CONT18970013310			CONW2111110800		
CONT16200710286			CONT18970013330	01.011,00	383	CONW2111110900		
CONT16570013270	0758,00	379	CONT19200041060	01.110,00	398	CONW2111111000		
CONT16670013275	5758,00	379	CONT21100810290	01.521,00	369	CONW2111111100 CONW21111111200		
CONT16970013280	0895,00	379	CONT2120081000	0571,00	393	CONW2111111200		
CONT17200710150			CONT2120081024	7887,00	395	CONW2111111600		
CONT17200710296			CONT2120081028			CONW211111000		
CONT17200710297			CONT2120081028			CONW2111120700		
CONT17200710298			CONT2120081028			CONW2111120800		
CONT17200710305			CONT2120085024			CONW2111120900		
CONT17200731090			CONT21206830370			CONW2111121000		
CONT17200731149			CONT21206840372			CONW2111121100		
CONT17200810282			CONT2130081027			CONW2111121200		
CONT17200810295			CONT2150081024			CONW2111121400		
CONT17200810846			CONT2150081026			CONW2111121600		
CONT17200810847			CONT2150081027			CONW2111210500		
CONT17206830376			CONT21500810272			CONW2111210700		
CONT17206830380			CONT21500813000			CONW2111210800	841,00	341
CONT17206840378			CONT2160081300			CONW2111210900		
CONT17206840382			CONT2190081029			CONW2111211000	)902,00	341
CONT17300710150			CONT21900813002			CONW2111211100	)1.014,00	341
CONT17300730062			CONT2210001048			CONW2111211200	)1.110,00	341
CONT17300731090			CONT2210001054			CONW2111211400		
CONT17300731149			CONT2210001154			CONW2111211600		
CONT1750081003			CONT24207030150			CONW2111220500		
CONT17500810717			CONT24208030130			CONW2111220700		
CONT17500810718			CONT2557871000			CONW2111220800		
CONT17500813050			CONT25578710659			CONW2111220900		
CONT17500817501 CONT17500817511			CONT25578710660 CONT25578713200	02.726,00 0	5/0	CONW2111221000		
CONT1750081751			CONT2567871320			CONW2111221100	1.110,00	343
CONT17570013120			CONT2507871320.			CONW2111221200		
CONT17570013140			CONT2600071064			CONW2111221400		
CONT17570013100 CONT17600813050			CONT2650071004.			CONW2111221600 CONZ8955003		
CONT17670013125	5494,00 5 688.00	381	CONT2650071070			CONZ8955003		
CONT17670013145			CONT4100000065			CONZ8955003		
CONT17670013145	,		CONT4100000066	7 7 120.00	377	CONZ8955004		
CONT17700710268	,		CONT410000000668			CONZ8955006		
CONT17700710200			CONT4100000336			CON20333000		520
CONT17970013130	,		CONT43500073180					
CONT17970013150			CONT4350008317!					
CONT17970013170			CONT4360007318					
CONT18200010305	,		CONT43600083176					
CONT18200010602			CONT43900073182					
CONT18200011305			CONT4390008317					
CONT18200012305			CONT4450005317					
CONT18200040644			CONT4450005318					
CONT18200060640			CONT44600053172					
CONT18270710279			CONT44900053173					
CONT18270710283			CONW2003500	1.382,00	346			
CONT18270710284			CONW2003501	1.431,00	346			
CONT18270710294	4836,00	375	CONW2003502					

# General terms and conditions

# CONTI Sanitärarmaturen GmbH

Our offers, order confirmations, sales and deliveries are exclusively subject to the following Terms and Conditions. These also apply to all future transactions even if we do not expressly refer to them in each individual case. Terms and conditions of the customer (buyer or ordering party) do not become part of the contract, even if they have not expressly been objected to. Any individual agreements made with the buyer on a case-by-case basis (including side agreements, supplements and amendments) always take priority over these General Terms and Conditions. Subject to evidence to the contrary, the content of such agreements requires a written contract or our written confirmation. Our Terms and Conditions apply only with respect to entrepreneurs within the meaning of sections 14, 310(1) German Civil Code (Bürgerliches Gesetzbuch – "BGB").

#### I. Offer

- 1. Any documents provided in the context of an offer, such as illustrations, drawings, weights and dimensions, shall only be approximate unless they are expressly stated as binding. We reserve rights of ownership and copyright in relation to cost quotations, calculations, drawings and any other documents. This shall also apply to written documents that have been designated as being "confidential". Any transfer to third parties by the customer requires our prior express written consent.
- 2. Quoted prices shall be non-binding.
- 3. Goods orders placed by customers are deemed to constitute a binding contract offer. Unless otherwise indicated in the order, we are entitled to accept this contract offer within two weeks after receiving it.
- 4. Acceptance may be declared either in writing (e.g. by order confirmation) or by delivery of the goods to the customer.

## II. Scope of delivery

The scope of delivery shall be based (i) on our written order confirmation or (ii) on the offer in the case of an order with a fixed period of validity and timely acceptance provided that no order confirmation is issued.

# III. Delivery time

- 1. Details regarding delivery times and dates are always only approximate and without obligation. If, in individual cases, we have expressly stated that the delivery time is binding, it shall only commence after all details regarding the pending delivery in particular all technical questions have been clarified and only in the event of the timely and complete fulfilment of the customer's contractual obligations. We reserve the right to invoke the "defence of non-performance of the contract" (Einrede des nicht erfüllten Vertrages).
- 2. The delivery time shall be reasonably extended in the event of measures in the context of industrial action, in particular strikes and lockouts, as well as if unforeseen obstacles arise that are beyond our control if such obstacles demonstrably have a significant influence on the completion or delivery of the delivery item. The same applies if those circumstances arise with sub-contractors. We are not re-

sponsible for the aforementioned circumstances even if they occur during a pre-existing delay. In important cases, we will notify the customer of the start and end of such obstacles as soon as possible.

- 3. The delivery deadline is deemed to have been met if, prior to its expiry, the delivery item has left the factory.
- 4. If a customer is in default of acceptance or violates any other obligations to cooperate, we are entitled to claim damages for any loss or damage incurred in this regard, including any additional expenses incurred. This shall not affect any further rights and claims.
- 5. If the conditions laid down in clause III.4 have been met, the risk of accidental loss or accidental deterioration of the purchased item passes to the customer at the time at which the customer is in default of acceptance or payment.
- 6. In the event of call-off orders, the delivery date is deemed to be the period agreed between the customer and us. If the orders are not called-off within a reasonable grace period set by us, we are free to deliver the goods and invoice them or to withdraw from the purchase agreement and assert a claim for damages.

## IV. Prices, terms of payment

- 1. Unless otherwise indicated in the offer or the order confirmation, our prices effective on the day of delivery apply "FCA Wettenberg", including packaging if applicable. The prices apply in addition to value added tax at the statutory rate as applicable at the time of delivery.
- 2. The deduction of a cash discount requires a specific written agreement. Unless indicated otherwise in the order confirmation, the net price (without any deduction) is due and payable within 30 days from invoicing. Customer service invoices are payable net immediately. If the customer is in default of payment, we are entitled to claim default interest of 9% over the base rate pursuant to section 247 BGB. We reserve the right to claim additional loss or damage caused by the default. Any circumstances that come to light after the contract has been entered into which may reduce the customer's creditworthiness result in all our claims falling due immediately and entitle us to request security.
- 3. Customers shall only be entitled to set off any payment claims if their counterclaims have been upheld and declared unappealable by a court of law, or if such counterclaims are uncontested or have been accepted by us. In addition, customers shall only be entitled to exercise a right of retention if their counterclaim is based on the same contractual relationship.
- 4. Unless otherwise indicated in the offer or the order confirmation freight and document charges shall be born by the customer.
- 5. Goods that have been supplied free of defects may only be returned once we have granted our written approval. For all returned goods, we will deduct 35% from the credited price for processing costs. Any necessary reconditioning or repackaging costs will be charged for separately. The customer shall bear the return transport

risk and the return transport costs. Only returns of any kind that are free of charge and have been agreed or approved by CONTI Sanitär-armaturen GmbH prior to the return will be accepted.

6. Our commercial agents are not entitled to collect any payments.

## V. Transfer of risk and acceptance

- 1. Unless otherwise indicated in the order confirmation, delivery "FCA Wettenberg"shall be deemed agreed. Any transport packaging and other packaging in accordance with the German Packaging Regulations (Verpackungsverordnung) are not taken back, except for pallets and the items referred to in clause IV.5. Customers are obliged to organise the disposal of the packaging at their own expense.
- 2. If customers require, we will insure the consignment against any transport damage as well as against any other insurable risks. The costs that accrue in that regard will be borne by the customer.
- 3. The risk shall pass to the customer acc. to the agreed Incoterm, even if partial deliveries are made or if we have taken on additional obligations such as dispatch costs or delivery and installation. We reserve the right to determine the shipping method.
- 4. If delivery or shipping is delayed due to circumstances for which the customer is responsible, the risk passes to the customer from the day on which the customer is notified that the goods have been made available; at the request and cost of the customer, we will insure the goods that are to be supplied.
- 5. Delivered items must be accepted by the customer even if they have insignificant defects without prejudice to the rights under clause VIII.
- 6. Part deliveries are permissible.

## VI. Reservation of title

- 1. We reserve title in the delivered goods until receipt of all payments due under the contract. If customers act in breach of contract, in particular if customers default on their payment obligations, we are entitled to take back the goods. Our taking back of the goods does not constitute a withdrawal from the contract unless we have expressly declared this in writing. After taking back the goods we are entitled to sell these. The proceeds of sale shall be credited against the customer's liabilities less any reasonable costs of sale.

  2. Customers are obliged to treat the delivered goods with due care; customers are in particular obliged, at their own expense, to insure the goods sufficiently and at replacement value against damage caused by fire, water and theft. If any maintenance and inspection work is required, customers shall perform this work in good time and at their own expense.
- 3. In the event of attachments or other third-party interventions, customers shall immediately notify us in writing to enable us to bring a legal action in accordance with section 771 German Code of Civil Procedure (Zivilprozessordnung "ZPO"). If the third party is unable to reimburse us for the judicial or extrajudicial costs of a legal

action pursuant to section 771 ZPO, the customer shall be liable for any costs incurred by us.

- 4. Customers are entitled to resell any goods subject to reservation of title in the ordinary course of business; customers do, however, hereby assign to us all claims arising from the resale against their buyers or third parties together with all associated rights equivalent to our final invoiced amount (including VAT), irrespective of whether the goods have been resold with or without agreement. Customers shall remain authorised to collect this claim even after it has been assigned. This is without prejudice to our right to collect such claim ourselves. However, we undertake not to collect such claim as long as customers continue to meet their payment obligations in time and in full, as long as they are not in default of payment and, in particular, as long as no application has been made to start insolvency proceedings or suspend payments. If the authorisation to collect the claim is exercised, we are entitled to demand that customers notify us of the assigned claims and their debtors, provide all details necessary for a collection of such claims, hand over the attendant documents and notify the debtor (third party) of such assignment.
- 5. Any processing or transformation of the goods subject to reservation of title by the customer is always deemed to have been made on our behalf. If the goods subject to reservation of title are processed together with objects that do not belong to us, we shall acquire joint ownership of the new item at a ratio of the value of the goods subject to reservation of title (final invoice amount including VAT) in relation to the value of the other processed items at the time of processing. The same provisions as apply to the goods delivered subject to reservation of title shall apply in relation to the item that results from the processing.
- 6. If the goods subject to reservation of title are inextricably combined with objects that do not belong to us, we shall acquire joint ownership of the new item at a ratio of the value of the goods subject to reservation of title (final invoice amount including VAT) in relation to the other combined items at the time of combining. If the combination is such that the customer's goods are to be regarded as the main item, it shall be deemed to have been agreed that the customer shall transfer proportionate joint ownership to us. The customer shall hold the resulting sole or joint ownership on our behalf.
- 7. In order to secure our claims against them, customers also assign to us any claims which arise against a third party from the combination of the purchased item with a piece of real estate.
- 8. We undertake, upon the customer's request, to release the securities to which we are entitled to the extent that the realisable value of our securities exceeds the value of the claims to be secured by more than 10%; we are entitled to select which securities are to be released.

#### **VII. Notifications of defect**

1. Warranty rights of customers require that customers have duly met their duties to inspect and give notice of defects according to section 377 German Commercial Code (Handelsgesetzbuch – "HGB"). Customers are obliged to inspect the delivered parts immediately after receipt.

# General terms and conditions

# CONTI Sanitärarmaturen GmbH

- 2. In the case of obvious defects, any notifications of defects must be addressed to us in writing without delay within 8 days from receipt, and these will only be taken into account if the goods are still in the same condition which they were in when they were delivered. In the event of justified complaints we reserve the right to replace or repair the defective goods. If customers fail to duly inspect the goods and/or duly notify us of any defects, our liability with regard to the defect that we were not notified of either in a timely manner or in the proper form is excluded in accordance with the statutory provisions.
- 3. We must be notified of any other defects and any consequential damage that may occur without delay and no later than within 2 weeks after they were discovered or could have been discovered. The customer must ensure that all required measures to mitigate the damage are taken without delay. We must be given the opportunity to inspect the defective parts and the damage in situ in their unchanged state.

## VIII. Liability for defects of delivery

We are liable for any defects in accordance with the following claims.

- 1. Parts that turn out to be defective due to circumstances prior to the passing of risk, in particular due to faulty design, poor materials or poor workmanship, will at our discretion either be repaired or replaced. The customer must return any replaced parts. If the repair is unsuccessful (section 440 sentence 2 BGB) or if the replacement item is also defective, the customer may reasonably reduce the contractually agreed price or withdraw from the contract. In the event of insignificant defects, a withdrawal from the contract is excluded. Special statutory provisions that apply if the unprocessed goods are to ultimately be delivered to a consumer shall remain unaffected in any event (recourse against supplier pursuant to sections 478 et seq. BGB) even if the consumer has processed the goods further.
- 2. Following consultation with us, the customer shall afford us the required time and opportunity to carry out all the repairs and replacements deemed necessary by us; otherwise we are deemed released from our liability for defects. Only in urgent cases which jeopardise operational safety and to prevent disproportionately large losses or damage in which case we must be notified immediately and, where possible, our consent must be obtained or if we are delayed in rectifying the defect, shall customers have the right to rectify the defect themselves or arrange for this to be done by qualified third parties and to request that we reimburse the necessary costs.
- 3. Provided that the complaint proves to be justified, we will bear any costs arising for purposes of inspection and subsequent performance following a notification of defects by the customer; otherwise, those costs shall be borne by the customer.
- 4. We will bear or reimburse the necessary costs incurred for purposes of inspection and subsequent performance in particular costs of transport, infrastructure, labour and materials as well as disassembly and installation costs, if applicable in accordance with

statutory provisions in the event that there is an actual defect. Otherwise we are entitled to require the customer to reimburse us for costs incurred due to the unjustified request to remedy a defect (in particular inspection and transport costs) unless the customer was aware of the lack of a defect or could have detected this.

- 5. All electrical installations and connection work that involves our products may only be carried out by skilled electrical contractors. In the event that the installation is not carried out professionally, we do not accept any functional warranty claims, any other warranty claims and any damages claims.
- 6. Even in the event of defects, claims of the customer for damages or compensation for expenses incurred in vain only exist in accordance with clause IX. and, apart from that, are excluded.
- 7. Claims and rights of customers for defects become statute-barred after 2 years.

## IX. Liability for the breach of other obligations

- 1. We are liable for any loss or damage that we, a legal representative or a person employed in performing a contractual obligation for whom we are vicariously liable (Erfüllungsgehilfe) have caused due to intentional or grossly negligent breaches of duty.
- 2. In the event of ordinary negligence and subject to a more lenient standard of liability pursuant to statutory provisions (e.g. for the duty of care observed in our own affairs), we are only liable:
- a) for loss or damage suffered due to injury to life, physical injury or health,
- b) for loss or damage arising from a considerable breach of a fundamental contractual obligation (an obligation whose fulfilment is crucial for the proper performance of the contract and on the fulfilment of which the contracting party regularly relies and may duly rely); in this case our liability is, however, limited to compensation for the foreseeable loss or damage which typically occurs.
- 3. The restrictions of liability arising from clause IX.2 also apply in the event of breaches of duty by or for the benefit of persons for whose fault we are responsible in accordance with statutory provisions. The restrictions of liability do not apply if we have fraudulently concealed a defect of if we have provided an express warranty regarding the quality of the delivery items and for claims of the customer under the German Product Liability Act (Produkthaftungsgesetz).

Any liability beyond the above is excluded.

# X. Liability for defects in the processing of parts that have been sent in

We do not accept such liability if these defects arise from the properties of the material. If parts that have been sent in become unusable during processing due to faults in the material or other defects of the parts, we are entitled to charge for the processing costs we have

incurred. If the work pieces become unusable due to circumstances for which we are responsible, we will process similar replacement pieces to the following extent:

- a) In the event of individual orders, the customer shall provide a replacement piece free of charge and freight prepaid or we will deliver quantities that have been reduced accordingly.
- b) In the event of series orders we will provide compensation if the reject rate exceeds 5% of the quantities supplied; compensation will be paid for the costs incurred by the customer for raw materials and wages, but no more than 5 times the processing value for the workpiece to be replaced. At our discretion, we may also produce or procure similar replacement pieces ourselves. The customer does not have any claims beyond these, regardless of the legal basis.

# XI. Rights of the customer to withdrawal in the event of an impossibility of performance

- 1. The customer may withdraw from the contract if it becomes finally impossible for us to perform the contract in full prior to the passing of risk. The customer may also withdraw from the contract if, when ordering similar goods, the fulfilment of part of the delivery becomes impossible in terms of quantity and the customer has a legitimate interest in refusing a part delivery; if this is not the case, the customer may reduce the consideration accordingly.
- 2. If impossibility of performance occurs while the customer is in default of acceptance or is responsible for such impossibility, the customer shall remain obliged to pay the consideration.
- 3. If we fail to comply with an agreed delivery time, customers shall set a reasonable grace period for performance and if the grace pe-

riod is not met, then the customer is entitled to withdraw from the contract.

## XII. Right of the supplier to withdrawal

- 1. In the case of unforeseen events within the meaning of clause III. Provided that they significantly change the economic importance or the content of the goods or services owed or have a significant effect on our business as well as in the case of an impossibility of performance which becomes apparent subsequently, the contract shall be reasonably adjusted. Insofar as this is not economically justifiable, we have the right to withdraw from the contract in whole or in part.
- 2. The customer does not have any damages claims because of such withdrawal. Should we wish to avail ourselves of this right of withdrawal in our capacity as suppliers, we will immediately inform the customer as soon as we realise the implications of the event, even if an extension of the delivery period was initially agreed with the customer.


## XIII. Place of jurisdiction

- 1. If the customer is a merchant, a legal person under public law or a special fund under public law, the place of jurisdiction for all disputes arising from the contractual relationship shall be Gießen, Germany. We shall also be entitled to bring legal actions at the customer's headquarters.
- 2. Unless otherwise indicated in the order confirmation, our registered office shall be the place of performance.
- 3. German law shall apply.

Effective date 07/2020 CONTI Sanitärarmaturen GmbH



# Notizen

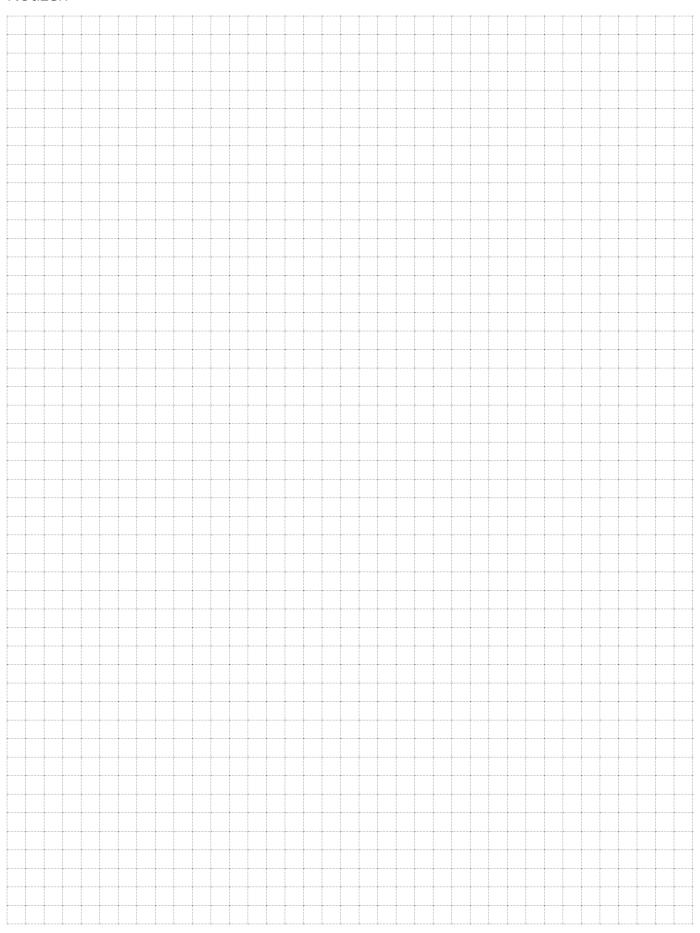



# Reliable & innovative

For over 40 years, the CONTI+ brand has been a byword for flexible and holistic shower room and washroom solutions for public, semi-public and commercial environments as well as the health sector.

Known for its innovative technology and high grade materials, the brand has gained a reputation for unfailing quality. With a wide-ranging product portfolio and many years of experience creating custom designs, CONTI+ is now widely recognised amongdesign engineers and architects for its valuable contribution to their projects. Every last detail is contemplated when developing tailor-made products, resulting in smart, individual solutions to suit a plethora of applications and equipment. The choice of shower and washbasin fittings encompasses a variety of colours and finishes as well as options for surface or flush mounting. Naturally, sustainable, hygienic and reliable are prime considerations in the development of all products.

Thanks to its dependable quality and innovative technology, CONTI+ has remained a trusted brand throughout the world for over 40 years.

CONTI Sanitärarmaturen GmbH Hauptstraße 98 35435 Wettenberg | Germany Phone +49 641 98221 0 Fax +49 641 98221 50 info@conti.plus www.conti.plus

Member of Fortuna Group +













\*Certificates are product related and not valid in general